Composed®

KOHLER, Faucets Widespread bathroom sink faucet with Lever handles,

1.2 gpm K-73060-4

Features

- Two Lever handles offer separate control of hot and cold water
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- 5-15/16" (151 mm) spout reach
- UltraGlide® valves with dry-stem technology are designed to eliminate common leak paths and provide smooth, effortless control
- Includes pop-up drain with 1-1/4" (32 mm) tailpiece
- Coordinates with Composed faucets, accessories, and showering components to complete your bathroom

Material

- ۰ Premium metal construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

Installation

- For 8" 16" (203 406 mm) centers
- Handles are preassembled on valves to simplify installation
- Quick-connect fittings make installation easy

Recommended Products/Accessories

K-23726 Drain treatment K-23723 Faucet cleaner K-73141 18" Towel Bar K-73142 24" Towel Bar K-73144 24" Double Towel Bar K-73145 towel arm K-73146 Double Robe Hook K-73147 Pivoting toilet paper holder K-73148 Vertical toilet paper holder







Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC **IAPMO** Certification

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color Code Description

| СР | Polished Chrome |
|----|--------------------------|
| SN | Vibrant® Polished Nickel |
| AF | Vibrant® French Gold |
| BN | Vibrant® Brushed Nickel |
| BV | Vibrant® Brushed Bronze |



Composed® KOHLER Faucets Widespread bathroom sink faucet with Lever handles, 1.2 gpm **K-73060-4**

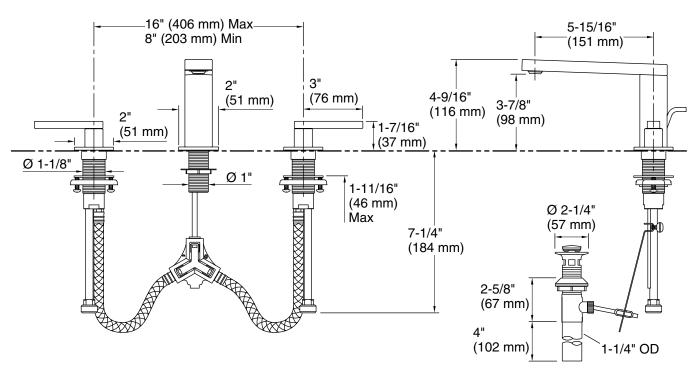

Pop-Up Drain

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Drain included: Yes

Drain with overflow: Yes

Spout:

Spout reach:

5-15/16" (151 mm)

Notes

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

