


**Item Number: 6513854**

**WARNING (To reduce the risk of fire, electric shock, or personal injury):**






- 1. We suggest installation by a **licensed electrician**.
- 2. Please read the instruction carefully and save it as you may need it at a later time.
- 3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done.
  - » Go to the main fuse, or circuit breaker, box in your home.  
Place the main power switch in the **“OFF”** position.
  - » Place the wall switch in the **“OFF”** position.
- 4. Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
- 5. Make sure that the ceiling or wall can stand the weight of the lamp before installation.
- 6. Make sure the voltage you are using is **120V**. The maximum wattage is **Type B, Max 40W** per bulb.
- 7. Keep the lamp away from acidic and alkaline substances in case of damaging the surface of the lamp.
- 8. When replacing bulbs, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
- 9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

**IMAGE FOR FINISHED PRODUCT:**

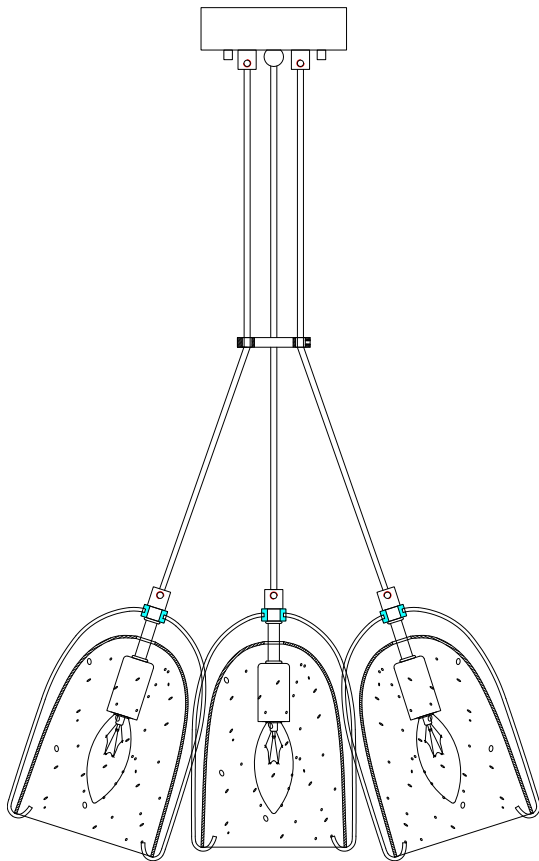

**TOOLS REQUIRED  
(NOT INCLUDED):**

Before starting assembly and installation please prepare the needed tools as below picture


				
Ladder	Philips Head or Flat Blade Screwdriver	Electrical Tape	Pliers	Wire Cutter/Stripper

### PARTS TYPE & QTY INCLUDING:

- (A) Mounting plate (1)
- (B) Green ground screw (1)
- (E) Canopy (1)
- (F) Strain relief (6)
- (G) Ball knob (2)
- (H) Cord (3)
- (I) Fixed collar (1)
- (J) Screw (6)
- (K) Iron frame (3)
- (L) Glass shade (3)

### ACCESSORIES & QTY ENCLOSED:

- (C) Plastic wire connector (3)
- (D) Mounting screw (2)
- (M) Allen wrench (1)

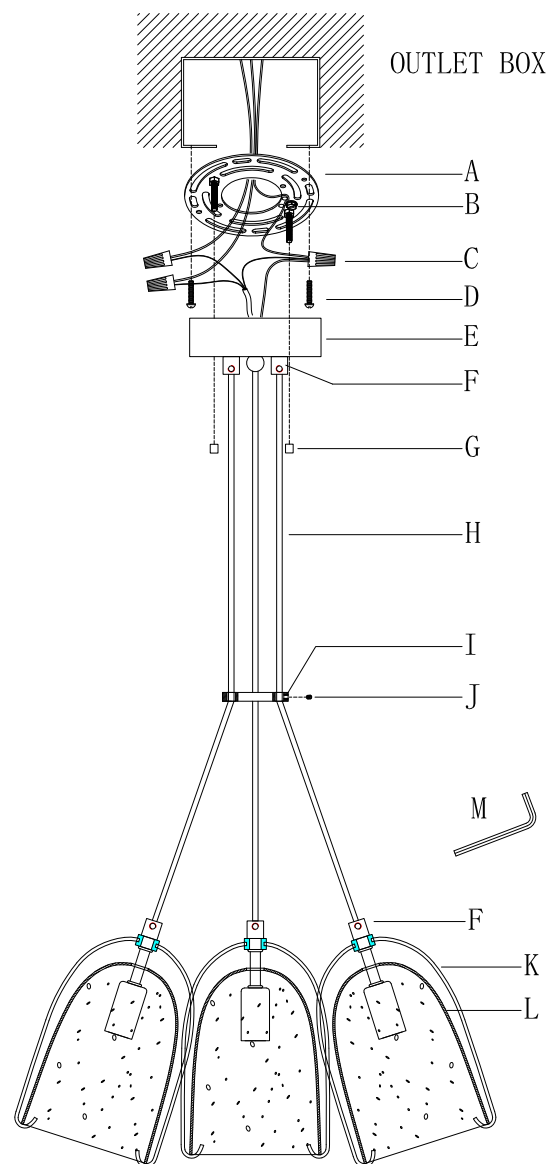

### ASSEMBLY & INSTALLATION INSTRUCTIONS:


1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.

2. Turn off power

Before you start the installation, **NEVER** attempt any work without shutting off the electricity until the work is done.

- » Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the “**OFF**” position.
- » Place the wall switch in the “**OFF**” position.


- 3 » Screw the strain reliefs (F) onto the threaded tubes in the iron covers (K) and tighten the screws in the strain reliefs (F) with Allen wrench (M). Unscrew the ball knobs (G) from canopy (E) then gently remove the mounting plate assembly (A).

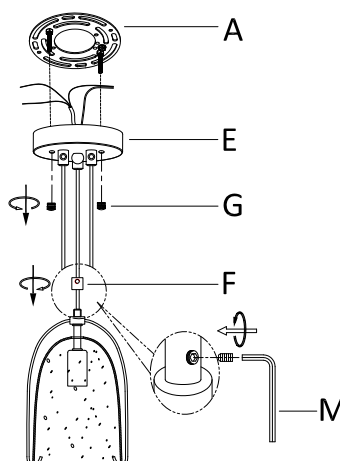


4 » Adjust the length of the cords (H) to achieve the desired height of the mounted fixture.

1) Use the Allen wrench (M) to unscrew the screws in strain reliefs (F), carefully pull and push the cords (H) through canopy (E) and strain reliefs (F) to lengthen or shorten the cords (H).

2) Once the desired height of fixture is achieved, carefully tighten the screws till snug.

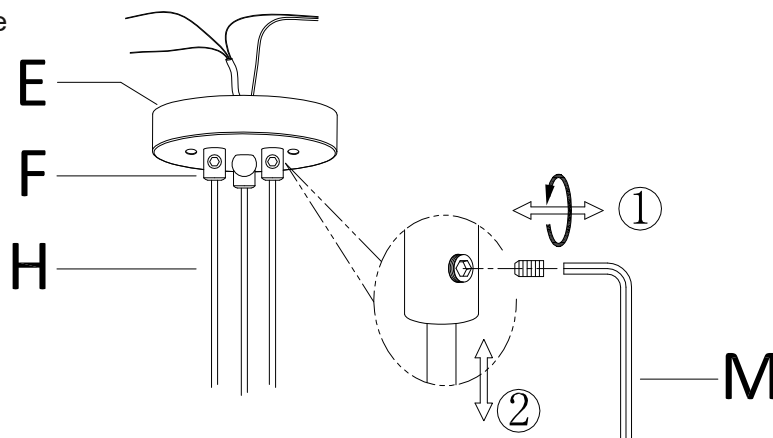


5 » If needed, shorten the length of the fixture wires in the cord (H) so that they all are at least 6 inches (152.4 mm) long above the canopy (E) within the outlet box.

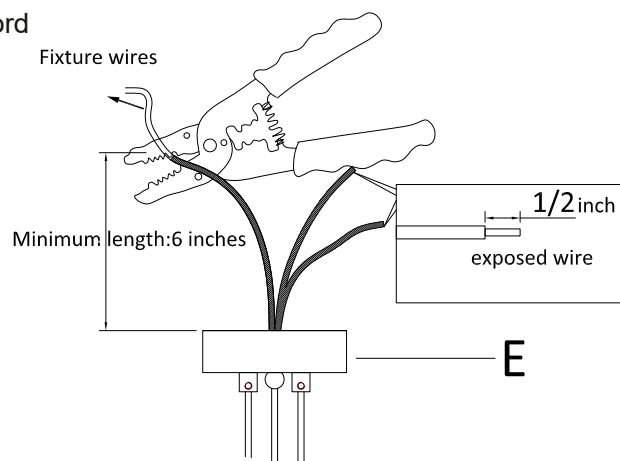

6 » Carefully pass supply wires through mounting plate (A).

Secure mounting plate (A) to the outlet box with mounting screws (D).


**NOTE: the side of mounting plate (A) marked "GND" must face out.**

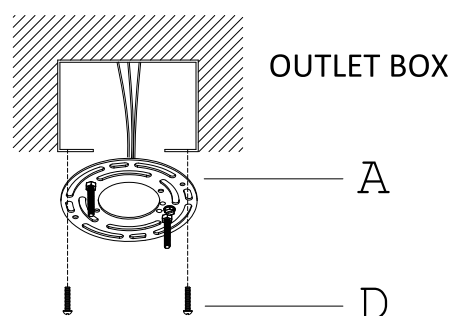

7 » Make wire connections

Connect wires as below wires connection shown. **PLEASE NOTE THAT GROUND WIRE IS BARE COPPER WIRE, NEVER CONNECT OTHER WIRES TO GROUND WIRES.**


### Connect ground wires according to the below chart

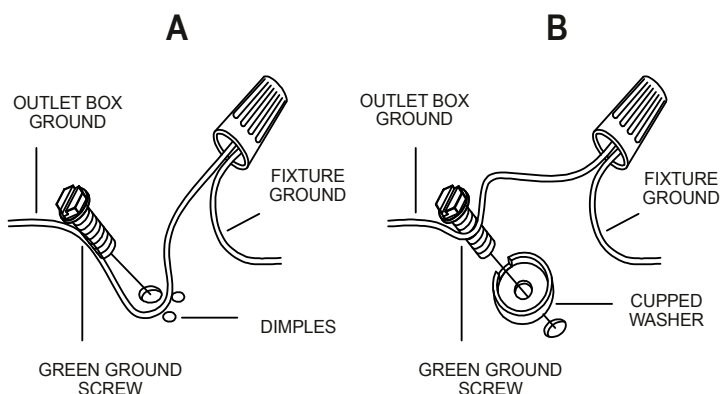

### Connect wires according to the below chart

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

\* Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)




- **Twist wires together with plastic wire connectors until tightly joined.**
- **Wrap each connector with approved electrical tape.**
- **Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.**

- 8 » Raise canopy (E) to the ceiling and secure canopy (E) in place by tightening ball knobs (G) onto the pre-assembled screws in mounting plate (A).


**Note: canopy (E) should be snug against the ceiling and ball knobs (G).**

**If not, adjust the threaded length on mounting plate (A):**

- **Unscrew the pre-assembled hex nuts.**
- **Screw the pre-assembled screws in or out of mounting plate (A).**
- **When the secure length is achieved, tighten the hex nuts and back to step 8.**

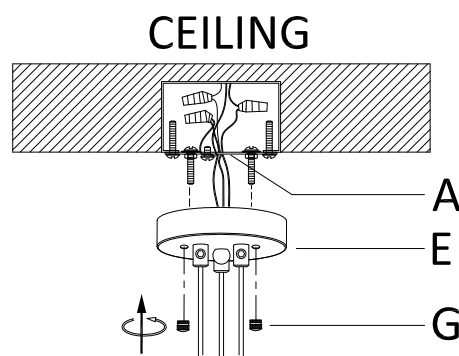

- 9 » 1) Adjust the fixed collar (I) to the proper position and tighten the screws (J) with Allen wrench (M).
- 2) Put the glass shade (L) into the iron frame (K) and hang it with the iron frame (K).
- 3) Install bulbs (Not included) (Please do not exceed the maximum wattage recommended on the socket.)

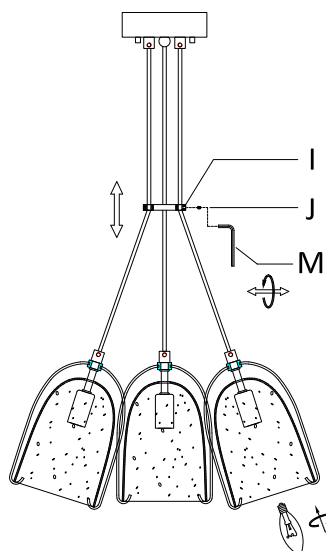

**10. Check everything is already installed properly, then you could turn on the light. Enjoy!**

### ORDERING PARTS

Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.

### CLEANING

To clean, wipe the fixture with a soft cloth. Clean glass with a mild cleaner (such as mild and non-abrasive soap). Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.