

DEWALT®

OUR MOST POWERFUL 20V MAX* CORDLESS ROUTER¹

DCW620B 20V MAX* XR® 2-1/4 PEAK HP PLUNGE ROUTER (TOOL ONLY)

Experience the power to tackle tough applications without the constraints of a cord with the World's First 20V MAX* Cordless 2-1/4 Peak HP Dedicated Plunge Router. The router's 2-1/4 peak HP brushless motor effortlessly handles bits up to 2-1/2 in. in diameter, while the variable speed dial ensures constant speed under load for consistent cutting performance. This router can complete up to 256 linear feet of 5/8 in. roundovers in pine on a single charge². Featuring integrated dust collection with Airlock™ compatibility to help maintain a clean workspace, this cordless router captures up to 97% of dust³. While the Perform & Protect™ Anti-Rotation™ System senses the rotational motion of the tool and shuts it down if the motion is excessive. From flawless edgework to aggressive plunge cuts, The 20V MAX* XR 2-1/4 Peak HP Plunge Router (battery and charger sold separately) seamlessly combines power, control, versatility and portability to deliver unparalleled DEWALT performance.

¹ Based on max watts out. ² Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.
³ This router can complete up to 256 linear feet of runtime per charge routing 5/8 in. roundovers in pine using DCBP520 battery (sold separately).
⁴ Collects up to 97% of dust cutting grooves in particleboard using DCBP520 battery and DWV015 dust extractor (battery and extractor sold separately).

20V MAX*
BRUSHLESS

XR

PERFORMANCE
REDEFINED™

GUARANTEED TOUGH.®

DCW620BSS

20V MAX* XR® 2-1/4 PEAK HP PLUNGE ROUTER (TOOL ONLY)



COLLECTS UP TO 97% OF DUST***

Integrated dust collection with Airlock™ compatibility

PLUNGE LOCK LEVER

Ability to engage/disengage plunge lock lever quickly & easily without having to remove hands from handles

ANTI-ROTATION™ SYSTEM

Senses the rotational motion of the tool & shuts it down, if the motion is excessive

VARIABLE SPEED DIAL

Quickly match the speed to the application

DEPTH STOP ADJUSTER

For fast and precise depth adjustments

ACCEPTS 1/2 IN. & 1/4 IN. SHANK ROUTER BITS


Providing the versatility to achieve numerous applications

SINGLE-WRENCH BIT CHANGES

With spindle lock button for quick & easy setup

3-POSITION ADJUSTABLE TURRET STOP

For quick depth adjustments at 1/8 in. increments

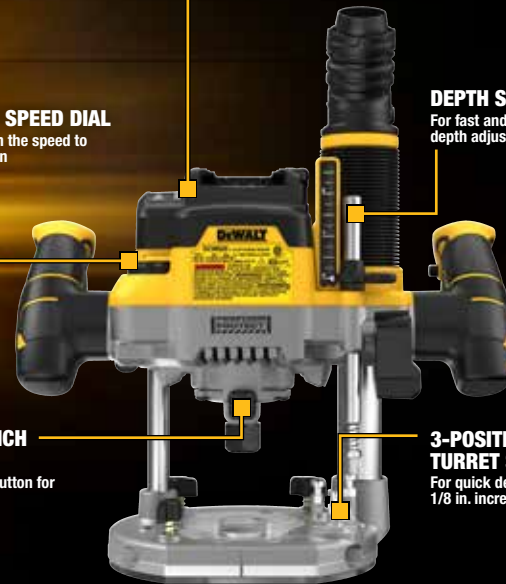

*Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

***Collects up to 97% of dust cutting grooves in particleboard using DCBP520 battery and DWV015 dust extractor (battery and extractor sold separately).


SPECIFICATIONS

HORSEPOWER	2-1/4 Peak HP
VARIABLE SPEED	11,000 - 23,000 RPM
COLLET	1/4 in. (6.35 mm) + 1/2 in. (12.7 mm)
PLUNGE DEPTH	2-3/4 in. (70 mm)
TOOL WEIGHT (TOOL ONLY)	8.0 lbs (3.62 kg)
WIRELESS TOOL CONTROL	Yes, For Dust Collection



World's First 20V MAX* Cordless 2-1/4 Peak HP Dedicated Plunge Router

PRODUCT OFFERINGS



DCW620B (TOOL ONLY)

(1) DCW620B 20V MAX* XR® 2-1/4 Peak HP Plunge Router (Tool Only), (1) 1/2 in. Collet, (1) 1/4 in. Collet, (1) Clear Sub-Base, (1) Dust Cap, (1) Dust Port Adapter, (2) Clear Dust Shield Inserts For Base, (1) Chip Collector, (1) 1/2 in. Centering Cone, (1) 30mm Guide Bushing, (1) Wrench

Battery and extractor sold separately.



** Regarding batteries, based on longer life (charge cycles) and more power, not in application vs. DEWALT 20V MAX* batteries with comparable amp hours.

Copyright © 2024 DEWALT. The following are examples of trademarks for one or more DEWALT power tools and accessories: the yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

DEWALT Perform & Protect™ products are designed to provide a high level of one or more of the following, dust containment, control or low vibration, without sacrificing performance.

DCW620BSS

GUARANTEED TOUGH.®

1-800-4-DEWALT

www.DEWALT.com