


Heavy Duty Commercial Levers

Specifications


Door Preparation:	Cross bore 2 1/8-in with 2X 5/16-in thru-bolt, edge bore 1-in, 1-in x 2 1/4-in latch mortise
Backset:	Fixed 2-3/4-in
Door Thickness:	1 3/8-in to 2-in
Cylinder:	SC4, 6 pin
Chassis:	Cylindrical
Faceplate:	2-1/4-in square corner
Strikes:	T-strike (1-1/8-in x 2-3/4-in) and ASA strike (1-1/4-in x 4-7/8-in)
Bolt:	1/2-in Throw
UL:	3 HR fire rated
ADA:	Yes
Door Handing:	All hardware is reversible for left or right handed doors.
ANSI Grading:	Meets Grade 2 standards
Rosette Diameter:	3- 5/16-in




Functions




ANSI F109 Keyed Entry



ANSI F76 Privacy




ANSI F75 Passage



ANSI F86 Storeroom

Dimensions

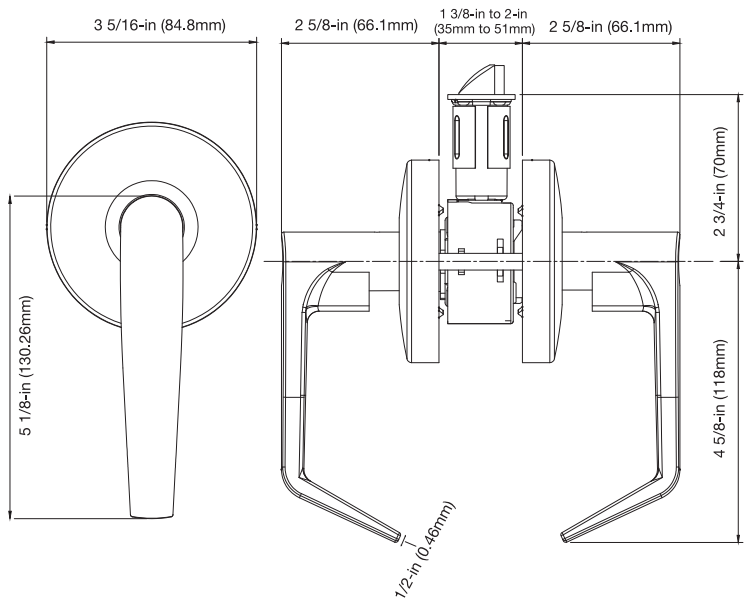

Finishes



Satin Chrome



Matte Black