

KOHLER®

Roughing-In

K-865-HB, K-865-HD, K-865-HM
TEA-FOR-TWO®
6' BATH WHIRLPOOL

Product Information

Applicable products:	
6' bath whirlpool, custom pump	K-865-HB
6' bath whirlpool, custom pump	K-865-HD
6' bath whirlpool, custom pump	K-865-HM

Fixture*:	
Bathing well:	
Basin area, bottom	49" (1245 mm) x 22" (559 mm)
Basin area, top	62" (1575 mm) x 28" (711 mm)
Weight	455 lbs (206.4 kg)
To overflow:	
Water depth	17" (432 mm)
Capacity	89 gal (336.9 L)
* Approximate measurements for comparison only.	

Pump	kW	V	A*
	1.5	240	11
* Approximate measurements for comparison only.			

Drop-in cut-out	70-1/4" (1784 mm) x 34-1/2" (876 mm)
-----------------	--------------------------------------

Included component:	
Cut-out for undermount	K-582 template

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):	
Pump/control	208-240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 69 lbs/square foot (333 kg/square meter) loading.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

Hot water supply should be 70% of capacity or greater. Installations will vary.


Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

Fixture conforms to ASME A112.19.1/CSA B45.2. All dimensions are nominal.

K-865-HB

Pump/Control Access

34" (864 mm) W x 15" (381 mm) H

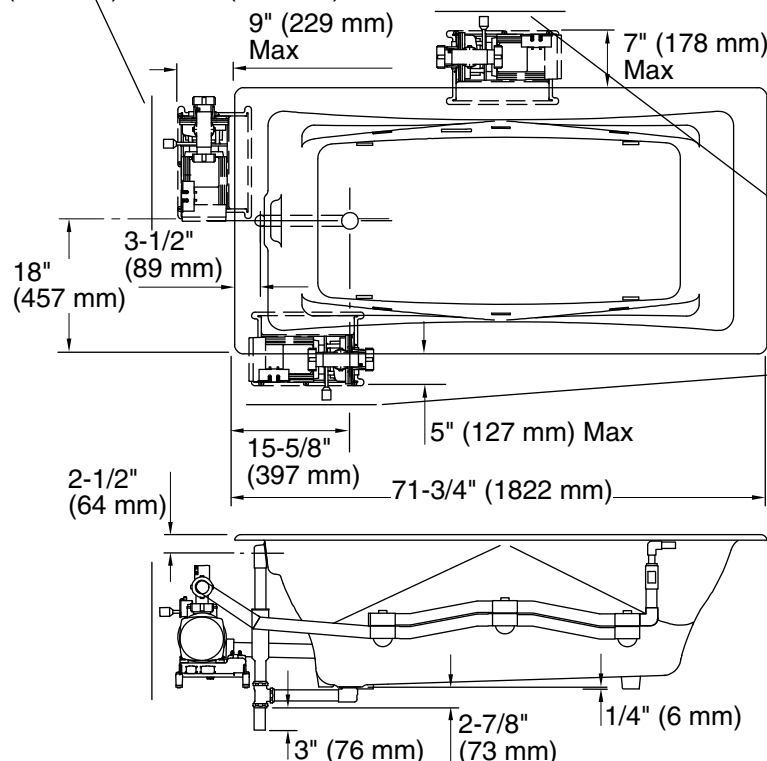

No change in measurements if connected with drain illustrated. (K-7169-AF or K-7169M-AF)

K-865-HD

Pump/Control Access

34" (864 mm) W x 15" (381 mm) H

K-865-HM

Pump/Control Access

34" (864 mm) W x 15" (381 mm) H

