

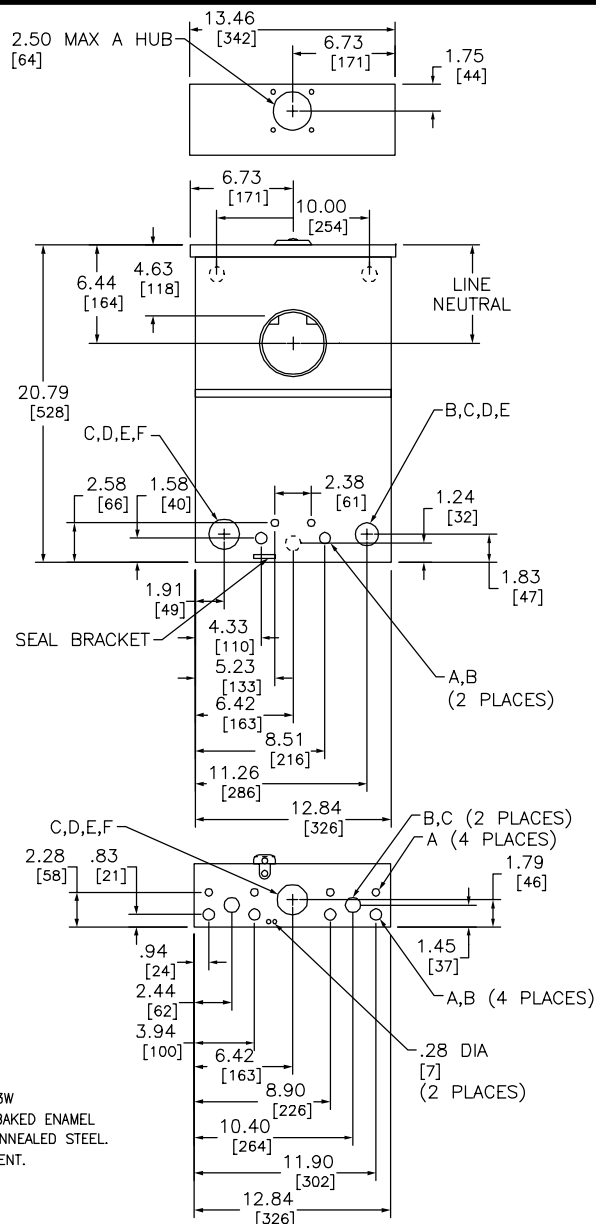



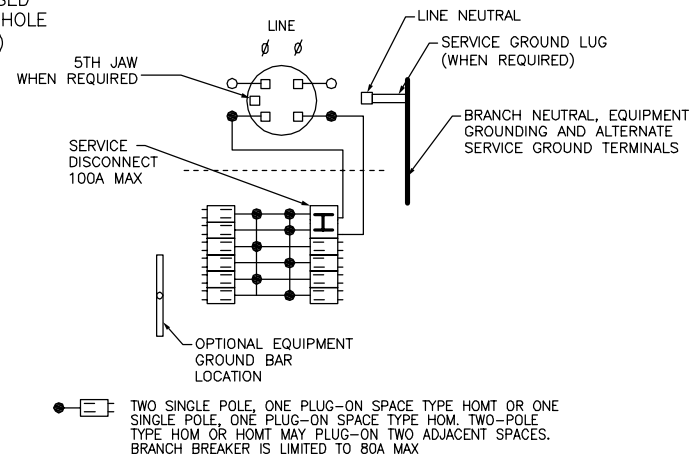

NOTES:
 MAXIMUM SYSTEM VOLTAGE: 120/240VAC, 1 Ø 3W
 FINISH - UL COMPONENT RECOGNIZED GRAY BAKED ENAMEL
 POWDER COAT PAINT OVER CLEANED GALVANNEAL STEEL.
 SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT.
 UL LISTED - FILE E-6294.
 SUITABLE FOR OVERHEAD SERVICE ONLY.

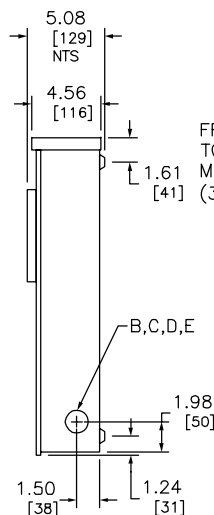

DUAL DIMENSIONS: INCHES MILLIMETERS

MAINS AMPERE RATING	FACTORY INSTALLED BYPASS TYPE	SHORT CIRCUIT CURRENT RATING	CATALOG NUMBER	SERIES	SPACES	MAXIMUM NUMBER OF SINGLE POLE HOM CIRCUITS	LINE SIDE PHASE & NEUTRAL LUGS AL/CU	SERVICE GROUND LUG
100	NONE	10K	SO1020M100S	M01	10	20	#6-1	#12-4 AL #14-4 CU

COMBINATION SERVICE ENTRANCE DEVICES
 100A MAX METER SOCKET
 RING TYPE METER MAIN
 RAINPROOF NEMA TYPE 3R ENCLOSURE
 SURFACE



DWG# 3144
 NO.