

TRANSITIONINSTALLATION



Dimension: 1.77"w x 0.345"h

Linoleum Tile 1 1/8" Subfloor

Install the flooring leaving a 1-1/8" gap between the two floor surfaces for the surface reducer installation.


V-SR-14


WATERPROOF SURFACE REDUCER

Used to fill the gap between two floors of unequal height.


Used with floors ranging from 2-6mm height.

Surface: Wear resistant Core Material: Rigid PVC

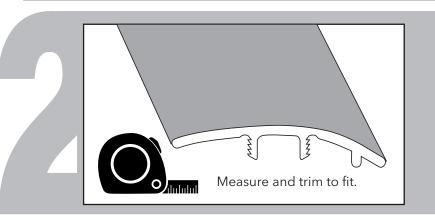

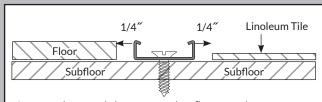

Center the track between the flooring leaving a 1/4" spacing between the track and floor planks. Screw track to subfloor using included screws (or glue down to subfloor with construction adhesive).

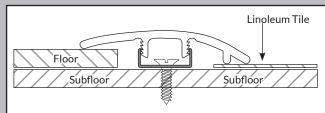

Starting at one end, press the molding into the track inching along the length of the molding. It will NOT snap in all at once. You may also use a rubber mallet.