

Fishing Cart Installation Instructions



Parts in package:

- (1)Frame * 1 (2)Fishing buckets * 6 (3)Handlebar * 1 (4)Handlebar fixing clips * 2
(5)Handlebar fixing screw * 1 (6)Wheels * 4 (7)Cloth bag * 1 (8)Front wheel bracket * 1
(9)Fixing screws * 4

Please read through this manual and following the instructions before and during use.

• 1. Unfolding the Fishing Cart Body

Please unfold the fishing cart body according to the steps shown in the diagram:

Unfold the frame in a "V" shape, following the arrows. Open the front and rear frames and lock them with the rotating buckles on the frame.




• 2. Front Wheel Assembly:

Insert the screws through the wheel, rotate the wheel, insert the axle into the fixed wheel bracket, and use the front wheel assembly to pass through the front rotating rudder.



● 3. Handlebar Assembly

Align the handlebar mounting plate with the screw holes and place it firmly on the front rudder. Remove the handlebar and align the screw holes with the handlebar. Install the handlebar vertically. Remove the screws, align them with the rudder holes, and tighten the nuts.

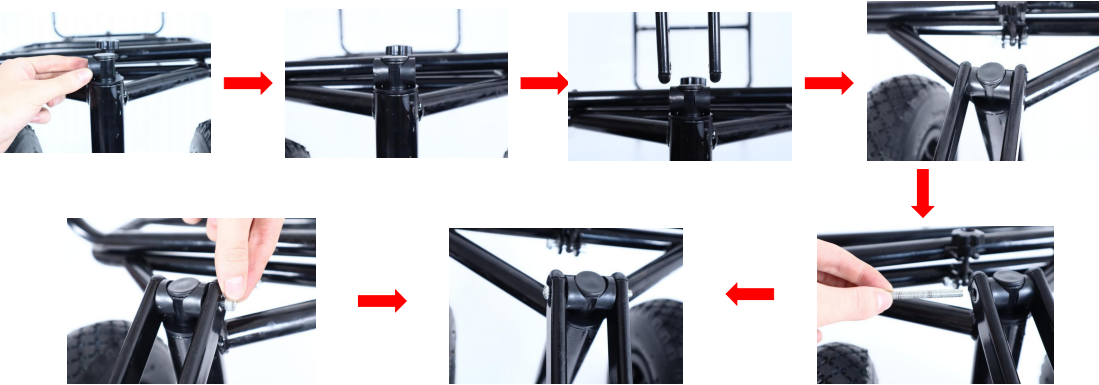

● 4. Rear Wheel Assembly

Prepare the remaining pair of rear wheels and screws. Note: The rear wheel screws come with an extra nut. Thread the screws through the tire's holes, rotate, and tighten. Then, thread the screws through the rear wheel support bracket and secure them with another nut.



● 5. Installation of fishing rod holder and cloth bag

Secure the bottom with Velcro straps, and secure the cloth bag with buckles around the edges.

Use a screwdriver to secure the screws. Pass the screws through the fishing rod holder and then through the screw holes on the front frame, and finally secure with nuts.



🔑 Precautions

- Please strictly follow the instructions during installation to ensure that all parts are securely tightened or locked in place to avoid parts falling off or safety issues due to improper installation during use.