

OVERVIEW


Our Niagara Conservation Tamper-Proof Faucet Aerators produce forceful streams at a reduced flow rate that minimize the amount of energy needed to heat water. Pressure compensating technology guarantees a consistent flow rate across a wide range of available pressure rates. These aerators are constructed of chrome-plated brass for durability. They also cannot be installed—or more importantly, removed or tampered with—without a special key, making these aerators perfect for commercial applications. These aerators fit standard size faucets.

KEY FEATURES

- Fits most male-threaded faucets (15/16-27)
- Install/Uninstall key included
- Pressure-compensating technology provides consistent output of water regardless of pressure



Bubble



Needle



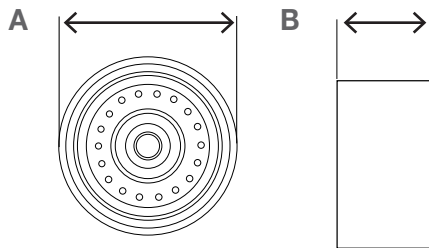
CERTIFICATION & PERFORMANCE REQUIREMENTS

- ASME A112.18.1 / CSA B125.1; ANSI/NSF 61

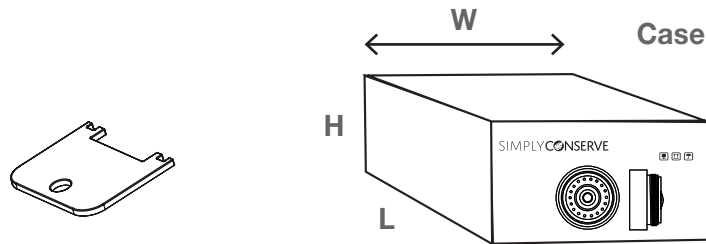
| MODEL # | SPRAY | FINISH | FLOW RATE | WATERSENSE |
|----------------|--------|--------|-----------|------------|
| N3205NFTP-PC-T | Needle | Chrome | 0.5 GPM | No |
| N3210NFTP-PC-T | Needle | Chrome | 1.0 GPM | Yes |
| N3210BFTP-PC-T | Bubble | Chrome | 1.0 GPM | Yes |
| N3215BFTP-PC-T | Bubble | Chrome | 1.5 GPM | Yes |

POTENTIAL ANNUAL SAVINGS¹

| SAVINGS TYPE | FLOW RATE | WATER | ELECTRIC HEATING | GAS HEATING |
|--------------|-----------|----------------|------------------|-------------|
| Dollar | 0.5 GPM | \$124 | \$107 | \$52 |
| Utility | 0.5 GPM | 14,892 Gallons | 842 kWh | 46 Therms |
| Dollar | 1.0 GPM | \$104 | \$67 | \$37 |
| Utility | 1.0 GPM | 10,512 Gallons | 594 kWh | 33 Therms |
| Dollar | 1.5 GPM | \$51 | \$39 | \$21 |
| Utility | 1.5 GPM | 6,132 Gallons | 347 kWh | 19 Therms |

DIMENSIONS
PRODUCT


*Dimensions are subject to change

PACKAGING


| MODELS | A | B |
|-----------------|------|------|
| N3205NFTP-PC-TU | 1.9" | 1.2" |
| N3210NFTP-PC-T | 1.8" | 1.8" |
| N3210BFTP-PC-T | 1.7" | 1.7" |
| N3215BFTP-PC-T | 1.7" | 1.7" |

| MODEL # | L | W | H | CASE QTY | GROSS WT |
|-----------------|-------|-------|------|----------|-----------|
| N3205NFTP-PC-TU | 19.6" | 5.9" | 6.2" | 84 | 24.15 lbs |
| N3210NFTP-PC-T | 6.3" | 19.5" | 6" | 84 | 24.45 lbs |
| N3210BFTP-PC-T | 6" | 19.6" | 6.1" | 84 | 23.5 lbs |
| N3215BFTP-PC-T | 6.1" | 19.7" | 5.9" | 84 | 24.8 lbs |

10-Year Limited Warranty

AM Conservation Group, Inc. guarantees to the original purchaser or recipient of an aerator that it is free from defects in material and workmanship for a period of 10 years. AM Conservation Group, Inc. will at our choice replace any part of the aerator which is in our opinion defective provided that the product has not been abused, misused, altered, or damaged after its purchase. This includes damage due to the use of tools or harsh chemicals. In the event a product has been discontinued, AM Conservation Group, Inc. will replace it with what we determine to be the closest product. AM Conservation Group, Inc. is not responsible for labor charges, installation, or other consequential cost. AM Conservation Group, Inc.'s responsibility shall not exceed the original cost of the product.

¹Potential Annual Savings

Factors in calculating savings potential:

- 3-person households with each person using a faucet 8 minutes per day, 365 days per year (AWWARF Residential Study)
- Comparing water use with these aerators vs. a standard 2.2 GPM unit
- US city average water and sewer cost of \$8.3 per 1,000 gallons (study done by NUS Consulting Group 2011)
- Average cost of electricity 0.113¢ per kWh (ENERGY STAR® Nov. 2013 Lightbulb Calculator www.energystar.gov)
- Average cost of gas \$1.137 per therm (Bureau of Labor Statistics April 2014)
- Calculations done by www.energystar.gov

For warranty claims, please contact:

customercare@amconservationgroup.com

To learn more, please visit:

www.amconservationgroup.com