


Features

- Fireclay
- Undercounter
- Single compartment
- Includes bottom basin rack
- Includes installation hardware
- 16" (40.6 cm) x 16" (40.6 cm)

UNDERCOUNTER SINK

K-5803
ALSO K-14578

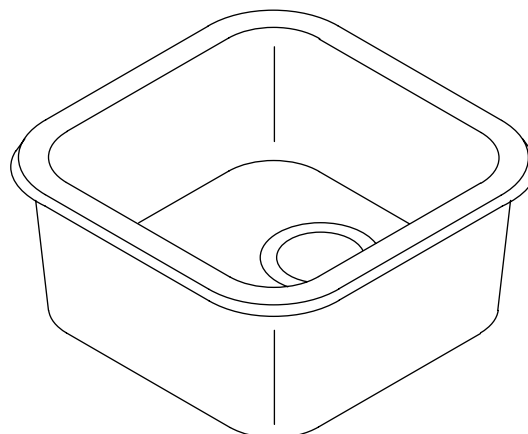

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2/CSA B45.1

Colors/Finishes

- 0: White
- S3: Stoneware
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-5803	Clay/Tones kitchen sink	<input type="checkbox"/> S3	<input type="checkbox"/> Other_____
K-14578-FR	Fruits of Labor™ kitchen sink	<input type="checkbox"/> 0	
K-14578-LC	Life in the Country™ kitchen sink	<input type="checkbox"/> 0	

Optional Accessories			
K-8801	Duostrainer® sink strainer	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Product Specification

The undercounter sink shall be made of fireclay. Sink shall be undercounter mount with a single compartment. Sink shall include bottom basin rack and installation hardware. Sink shall be 16" (40.6 cm) in length and 16" (40.6 cm) in width. Sink shall be Kohler Model K-_____-_____-_____.

CLAY/TONES™

Technical Information

Fixture*:	
Basin area	16" (40.6 cm) x 16" (40.6 cm)
Water depth	7-3/16" (18.3 cm)
Drain hole	3-7/8" (9.8 cm) D.
* Approximate measurements for comparison only.	

Included components:	
Gasket	84724
Basin clamp accessory rack	52047
Bottom basin rack	84745
Cutout template	115756-7



Installation Notes

Install this product according to the installation guide.

NOTICE: Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler (call 1-800-4-KOHLER). Kohler is not responsible for cutout errors when incorrect cut-out template is used.

Supplied basin clamp assemblies require 1" (2.5 cm) minimum countertop thickness. Installer must supply hardware for thinner countertops.

For multiple bowl undercounter installations, a minimum distance of 3-1/4" (8.3 cm) is required between cutouts. Countertop supplier to determine required support.

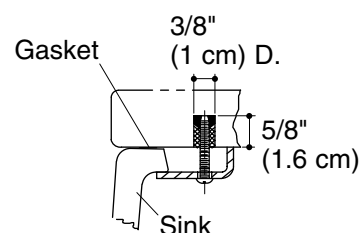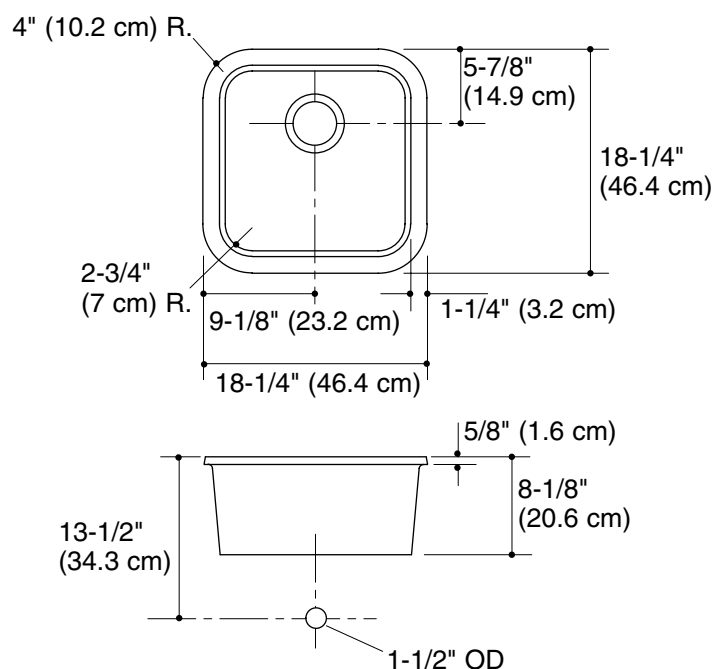

Marble Slab Installation



Product Diagram

CLAY/TONES™ UNDERCOUNTER SINK

Page 2 of 2
115756-4-BD

THE BOLD LOOK
OF **KOHLER**®