



## 30" Electric Range with Air Fry

Electric Range

Available Products: FCRE3083AS

Available Colors: Stainless Steel

Version: 05/23

## Product Specifications

### Cooktop

|                             |        |
|-----------------------------|--------|
| Cooking Surface Type        | Smooth |
| Element On Indicator Light  | Yes    |
| Hot-Surface Indicator Light | Yes    |

### Cooking Controls

|                     |     |
|---------------------|-----|
| Air Fry             | Yes |
| Bake                | Yes |
| Broil               | Yes |
| Child Lock          | Yes |
| Clock               | Yes |
| Convection Bake     | Yes |
| Delay Clean         | Yes |
| Delay Start         | Yes |
| Keep Warm           | Yes |
| Kitchen Timer       | Yes |
| Light               | Yes |
| Lockout             | Yes |
| Off                 | Yes |
| Oven Light          | Yes |
| Preheat             | Yes |
| Self Clean          | Yes |
| Set Clock           | Yes |
| Start               | Yes |
| Temperature Display | Yes |
| Timer On / Off      | Yes |
| Up / Down Arrow     | Yes |
| User Preferences    | Yes |
| Warm Zone           | Yes |

### Cooktop Performance

|                                        |             |
|----------------------------------------|-------------|
| Right Front Element Burner Size        | 9"          |
| Right Rear Element Burner Size         | 6"          |
| Left Front Element Burner Size (Small) | 6"          |
| Left Front Element Burner Size (Large) | 9"          |
| Left Rear Element Burner Size          | 6"          |
| Right Front Element Burner             | 3,200 Watts |
| Right Rear Element Burner              | 1,200 Watts |
| Left Front Element Burner (Small)      | 1,400 Watts |
| Left Front Element Burner (Large)      | 3,000 Watts |
| Left Rear Element Burner               | 1,200 Watts |
| Center Rear Element Burner             | 100 Watts   |
| Keep Warm Burner Location              | Center Rear |

### Cooking Controls Function

|                                                   |     |
|---------------------------------------------------|-----|
| Change between Continuous Bake Setting or 12-Hour | Yes |
| Energy Saving Feature                             |     |
| Delayed Bake                                      | Yes |
| Program Fahrenheit or Celsius                     | Yes |

### Drawer

|                     |            |
|---------------------|------------|
| Drawer Handle Style | Integrated |
| Drawer Type         | Storage    |

### Display

|                         |       |
|-------------------------|-------|
| Control Location        | Front |
| Display Interface Color | White |
| Display Type            | LED   |

### Electrical Specifications

|                          |         |
|--------------------------|---------|
| Amps @ 240 Volts         | 13 Amps |
| Minimum Circuit Required | 40 Amps |
| Voltage Rating           | 240 V   |

### General Specifications

|                        |        |
|------------------------|--------|
| Frigidaire Fit Promise | Yes    |
| Warranty - Labor       | 1 Year |
| Warranty - Parts       | 1 Year |

|                                 |                                   |
|---------------------------------|-----------------------------------|
| 30" Electric Range with Air Fry | Electric Range                    |
| Available Products: FCRE3083AS  | Available Colors: Stainless Steel |
| Version: 05/23                  |                                   |

Oven

|                           |                |
|---------------------------|----------------|
| Bake Element              | 2,500 Watts    |
| Bake Element Pass         | 4              |
| Bake Element Type         | Hidden         |
| Broil Element             | 4,000 Watts    |
| Broil Element Pass        | 6              |
| Broil System              | Yes            |
| Cleaning System           | Yes            |
| Convection                | Yes            |
| Convection Type           | Fan            |
| Number of Convection Fans | 1              |
| Number of Rack Positions  | 6              |
| Oven Interior Color       | Midnight Black |
| Oven Light Quantity       | 1              |
| Oven Light Watts          | 40 Watts       |
| Rack Position Type        | Embossed       |
| Rack Type 1               | Flat           |
| Rack Type 1 Quantity      | 2              |

Controls

|              |     |
|--------------|-----|
| Control Lock | Yes |
|--------------|-----|

Dimensions and Volume

|                          |             |
|--------------------------|-------------|
| Minimum Height           | 46 3/4"     |
| Maximum Height           | 47 3/4"     |
| Width                    | 30"         |
| Depth                    | 26"         |
| Depth With Door 90° Open | 47 5/16"    |
| Depth With Handle        | 28 1/2"     |
| Oven Interior Height     | 18 1/8"     |
| Oven Interior Width      | 25 3/16"    |
| Oven Interior Depth      | 19 7/8"     |
| Oven Capacity            | 5.3 Cu. Ft. |

Installation

|                          |     |
|--------------------------|-----|
| Adjustable Leveling Legs | Yes |
|--------------------------|-----|

Safety Certifications and Approvals

|           |     |
|-----------|-----|
| UL Listed | Yes |
|-----------|-----|

## Installation Diagram

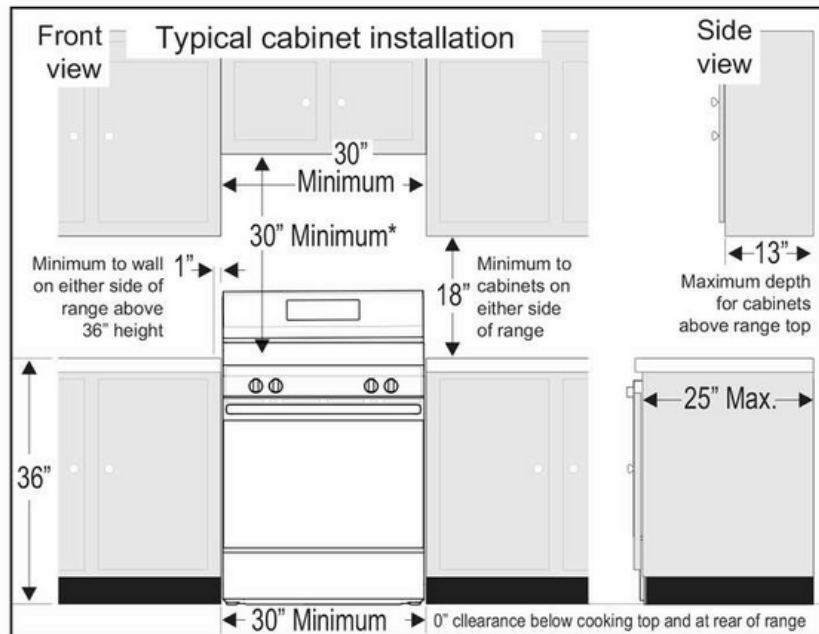


Fig. 1

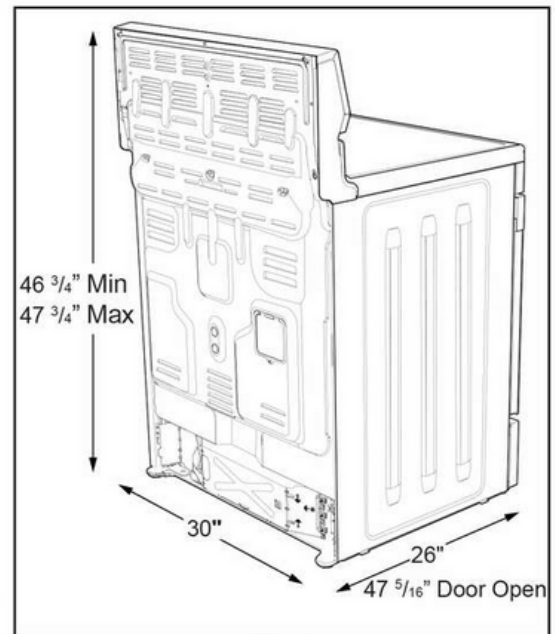


Fig. 2

\*30" (762 mm) MINIMUM CLEARANCE BETWEEN THE TOP OF THE COOKING SURFACE AND THE BOTTOM OF AN UNPROTECTED WOOD OR METAL CABINET; OR 24" (610 mm) MINIMUM WHEN BOTTOM OF WOOD OR METAL CABINET IS PROTECTED BY NOT LESS THAN 1/4" (6 mm) FLAME RETARDANT MILLBOARD COVERED WITH NOT LESS THAN NO. 28 MSG SHEET STEEL, 0.015" (0.4 mm) STAINLESS STEEL, 0.024" (0.6 mm) ALUMINUM OR 0.020" (0.5 mm) COPPER. 0" (0 mm) CLEARANCE IS THE MINIMUM FOR THE REAR OF THE RANGE. FOLLOW ALL DIMENSION REQUIREMENTS PROVIDED ABOVE TO PREVENT PROPERTY DAMAGE, POTENTIAL FIRE HAZARD, AND INCORRECT COUNTERTOP AND CABINET CUTS.

TO ELIMINATE THE RISK OF BURNS OR FIRE BY REACHING OVER HEATED SURFACE UNITS, CABINET STORAGE SPACE LOCATED ABOVE THE SURFACE UNITS SHOULD BE AVOIDED. IF CABINET STORAGE IS TO BE PROVIDED, THE RISK CAN BE REDUCED BY INSTALLING A RANGE HOOD THAT PROJECTS HORIZONTALLY A MINIMUM OF 5" (127 mm) BEYOND THE BOTTOM OF THE CABINETS.

