



5 Light Traditional Chandelier Fixture

Installation Instructions for item AL10011C5

AMBIATE

CAUTION: To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.

- Read all instructions before installing.
- Ensure all electrical connections must be made in accordance with the National Electric Code and local codes and ordinances. If you are uncertain of the methods of installing electrical wiring and lighting fixtures, secure the services of a qualified licensed electrician.
- Retain installation instructions for future maintenance reference.

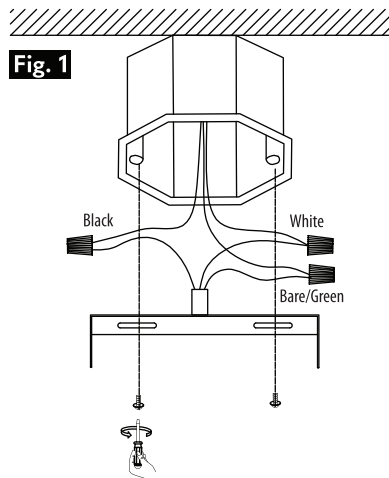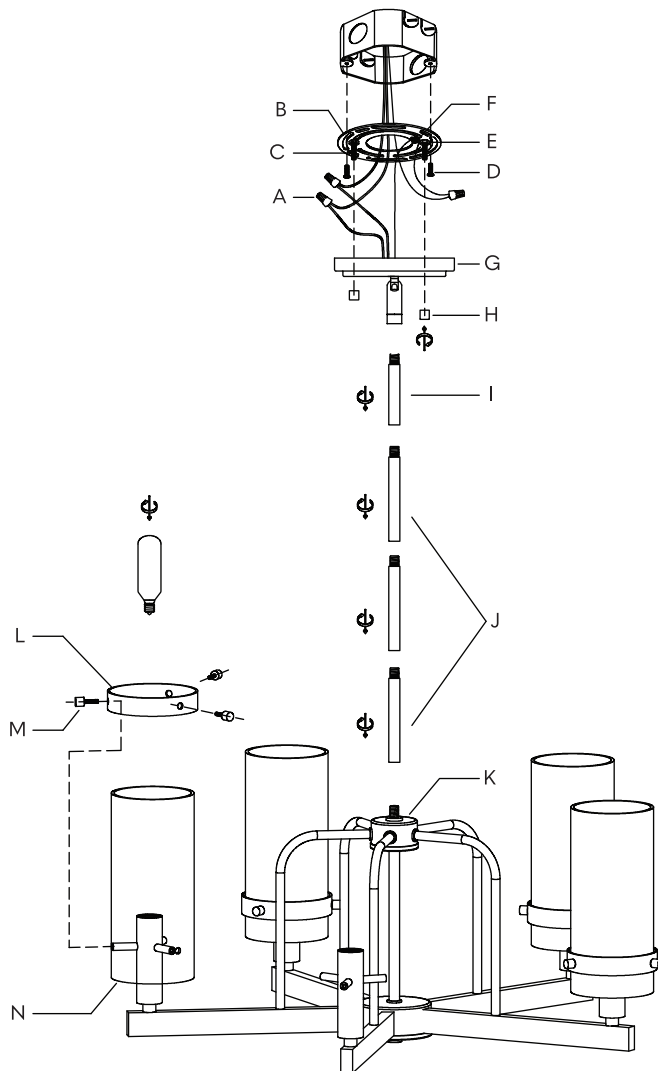

PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE

3. Remove mounting plate (B) from canopy (G) by unscrewing the canopy screws (H) from mounting plate screws (C).
4. Install mounting plate (B) onto junction box using mounting screws (D).
5. Thread fixture's wires through stems (I & J) and canopy (G). Stems are adjustable and can be added or removed to achieve desired height.
6. Screw stems (I & J) together, affix to fixture body (K) and canopy (G) (excluding the glass shades, wait until step 10).
7. Measure the length of the wires and allow at least 1 foot of excess wire.
8. Connect the fixture wires to junction box wires as shown (Fig. 1). Black to black, white to white, and bare/green to bare/green. Make sure that all wire connectors (A) are secure. If your outlet box has a green or bare copper ground wire, connect the bare copper wire from the fixture to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw. After wires are connected, tuck them carefully inside the junction box.
9. Attach canopy (G) to mounting plate (B) by tightening the canopy screws (H) onto mounting plate screws (C).
10. Affix the glass shades (N) to the fixture (K) by securing iron ring (L) with decorative screws (M).
11. Install bulbs, not to exceed max rated wattage. Turn on power at the circuit breaker.