

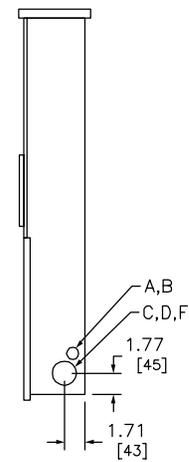


NOTES:
 FINISH - GRAY BAKED ENAMEL POWDER COAT
 PAINT OVER CLEANED GALVANNEALED STEEL.
 MAXIMUM SYSTEM VOLTAGE: 120/240 VAC 1 Ø 3W.
 UL LISTED - FILE E-6294
 SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT.
 SUITABLE FOR UNDERGROUND/OVERHEAD SERVICE.
 MEETS EUSERC SPECIFICATIONS.
 CONVERTIBLE TO SEMIFLUSH WITH SC200F FLANGE KIT

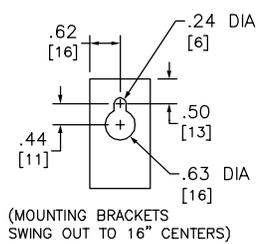

2 POLE TYPE HOM SERVICE DISCONNECT 50 AMP MAX. (FIELD INSTALLED)

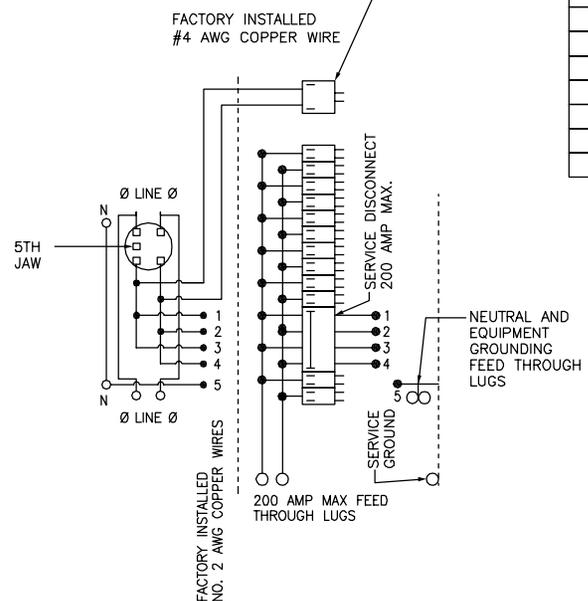

FACTORY INSTALLED NO. 2 AWG COPPER WIRES

5TH JAW

Ø LINE Ø

N

Ø LINE Ø

1

2

3

4

5

SERVICE DISCONNECT 200 AMP MAX.

200 AMP MAX FEED THROUGH LUGS

SERVICE GROUND

NEUTRAL AND EQUIPMENT GROUNDING FEED THROUGH LUGS

TWO SINGLE POLE, ONE PLUG-ON SPACE TYPE HOMT OR ONE SINGLE POLE, ONE PLUG-ON SPACE TYPE HOM. TWO POLE TYPE HOM, HOMA OR HOMT MAY PLUG-ON TWO ADJACENT SPACES. A 100 AMP MAX. CIRCUIT BREAKER MAY BE INSTALLED IN THE LOWEST POSITION IN THE BRANCH PANEL. ALL OTHER POSITIONS ARE LIMITED TO 70 AMP MAX. CIRCUIT BREAKERS.

A SQUARE D UL LISTED SECONDARY SURGE ARRESTER MAY PLUG ON TWO ADJACENT SPACES. ORDER CATALOG NUMBER HOM21755B

RC816D200CH

DUAL DIMENSIONS: INCHES MILLIMETERS

SYMBOL	KNOCKOUTS	
	CONDUIT SIZE IN	MM
A	.50	13
B	.75	19
C	1.00	25
D	1.25	32
E	1.50	38
F	2.00	51
G	2.50	64
H	3.00	76

AMPERE RATING	FACTORY INSTALLED BYPASS TYPE	SHORT CIRCUIT CURRENT RATING	CATALOG NUMBER	SERIES	SPACES	MAXIMUM NUMBER OF SINGLE POLE HOM CIRCUITS	LINE SIDE PHASE & NEUTRAL LUGS (AWG/KCMIL)	SERVICE GROUND LUG (AWG/KCMIL)	FEED THROUGH PHASE & NEUTRAL LUGS (AWG/KCMIL)
200	HORN	10K	RC816D200CH	002	8	16	#6-300	#14-1/0	#6-250

COMBINATION SERVICE ENTRANCE DEVICES
 RINGLESS METER MAIN
 RAINPROOF NEMA TYPE 3R ENCLOSURE
 SURFACE/SEMI FLUSH



DWG# 1996
 NO.