


Thank you for your purchase!

3-Seat Outdoor Steel Converting Patio Swing

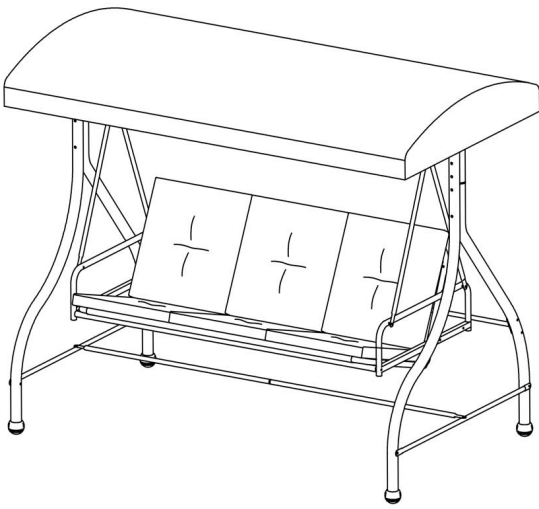

ASSEMBLY INSTRUCTIONS

Before You Begin:

Please identify all component parts and hardware pieces required before you begin. Carefully remove all of the components from the packaging and set aside for assembly. Assemble on a soft surface to prevent scratching during assembly.

Caution:

Tighten all components securely before use. Failure to do so may result in personal injury. DO NOT use any sharp objects to open plastic wrapped components as damage to product or components may result.

Warning:

CHOKING HAZARD - Small Parts. Adult Assembly Required.

Injury may result from tipping furniture. You must install the Tipping Restraint Hardware with the unit to prevent the unit from tipping and causing any accidental injury, instability, death or damage. The tipping restraint is intended only as a safety measure, it is not a substitute for proper adult supervision.

This tipping restraint is not an earthquake restraint. If you wish to add the extra security of earthquake restraints, they must be purchased and installed separately.

Serious or fatal crushing injuries can occur from furniture tipping over. To prevent furniture from tipping over it must be permanently fixed to the wall. Fixing devices for the wall are not included since different wall materials require different types of fixing devices. Use fixing devices suitable for the walls in your home.

Failure to detach this restraint before moving furniture may result in injury or damage.

DO NOT ALLOW CHILDREN TO CLIMB ON FURNITURE

Online Assembly Instructions: <http://ftp.flashfurniture.com/AssemblyInstructions/TLH-007-TAN-GG.pdf>

.....
Customer Service email: CustomerExperience@belnickinc.com | phone: 866-552-2810

Have a Question/Concern?

Quality products and first-class customer service are the cornerstone of long-lasting consumer relationships. We strive toward excellence in all we do and want you to be completely satisfied with your purchase.

Please contact our exceptional Customer Experience Agents at the email address or phone number shown below to assist you with any product questions or issues before requesting a return.

We look forward to serving you in a friendly, efficient manner to resolve any issues you may have.

Customer Service Email: CustomerExperience@belnick.com

Customer Service Phone: 866-552-2810

Our Warranty Statement


































This warranty covers manufacturing defects associated with your new product. The product is warranted from the original purchase date and to the original purchaser for normal usage, according to the below-referenced specifications and limitations.

- Non-moving metal parts are warranted for 5 years.
- Component parts including pneumatic cylinder, control mechanism, base and casters are warranted for 2 years.
- All other items are warranted for 1 year.

Normal usage means use in compliance with the restrictions and weight limits specified for the product. In the absence of product-specific restrictions and weight limits, normal usage means use for no more than forty hours per week by persons weighing 250 lbs. or less. Coverage terminates if the product is sold or otherwise transferred. Repairs made by parties other than Belnick also void this warranty.

This warranty will not cover: (1) labor, freight, or damage from misuse, abuse, negligence, alteration, assembly, installation, attachments, accident, vandalism, acts of nature or any other event beyond the control of Belnick; (2) tearing, scratching, scuffing, or blemishing of leather or fabric; (3) cosmetic damage that may result from normal usage; (4) damage attributable to use by persons exceeding specified weight limits or commercial use exceeding forty hours per week; or (5) rust or other damage caused by exposure to moisture. The user assumes all risk of injury resulting from use of this product. Liability for incidental or consequential damage is excluded. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

PARTS


<p>A</p> <p>Left Side Top Frame Post</p>  <p>1PC</p>	<p>B</p> <p>Right Side Top Frame Post</p>  <p>1PC</p>	<p>C</p> <p>Front Legs</p>  <p>2PCS</p>	<p>D</p> <p>Back Legs</p>  <p>2PCS</p>	<p>E</p> <p>Left & Right Leg Bottom Braces</p>  <p>2PCS</p>	<p>F</p> <p>Left Side Upper Stabilizing Bar</p>  <p>1PC</p>	<p>G</p> <p>Right Side Upper Stabilizing Bar</p>  <p>1PC</p>
<p>H</p> <p>Left Side Lower Stabilizing Bar</p>  <p>1PC</p>	<p>I</p> <p>Right Side Lower Stabilizing Bar</p>  <p>1PC</p>	<p>J</p>  <p>2PCS</p> <p>J1</p>  <p>2PCS</p>	<p>K</p> <p>Left & Right Arms</p>  <p>2PCS</p>	<p>L</p> <p>Front Seat Attachment Bar</p>  <p>1PC</p>	<p>M</p> <p>Swing Seat</p>  <p>1PC</p>	<p>N</p> <p>Fabric Canopy</p>  <p>1PC</p>
<p>O</p> <p>Left & Right Canopy Frame</p>  <p>2PCS</p>	<p>P</p> <p>Seat Cushions</p>  <p>3PCS</p>	<p>Q</p> <p>Rear Seat Bracket Note: Install with open side facing outward</p>  <p>2PCS</p>				
<p>1</p> <p>Swing Attachment Springs</p>  <p>2PCS</p>	<p>2</p> <p>Bolt/Nut/Cap To Attach Legs To Upper Frame Posts</p>  <p>M8 × 105MM 8PCS</p>	<p>3</p> <p>Front Seat Attachment Bar Bolts</p>  <p>M8 × 40MM 2PCS</p>	<p>4</p> <p>Bolt/Nut/Cap for Left and Right Side Lower Seat Back Attachment to Arms</p>  <p>M6 × 75MM 2PCS</p>	<p>5</p> <p>Bolt and Wing Nut Set for Left and Right Side Upper Seat Back Attachment to Arms</p>  <p>M6 × 75MM 2PCS</p>	<p>6</p> <p>Bolt/Nut/Cap For Upper Stabilizing Bar, Left & Right Bottom Leg Braces & Left & Right Side Top Frame Posts</p>  <p>M6 × 55MM 6 PCS</p>	<p>7</p> <p>Bolt/Nut/Cap for Rear Seat Bracket</p>  <p>M6 X 60MM 4 PCS</p>
<p>8</p> <p>Bolt/Nut/Cap For Swing Attachment Bars</p>  <p>M6 × 40MM 2 PCS</p>	<p>9</p> <p>Bolt/Nut/Cap To Attach Left & Right Upper Stabilizing Bar & To Attach Left & Right Lower Stabilizing Bar To Legs</p>  <p>M6 X 35MM 4 PCS</p>	<p>10</p> <p>Bolt/Nut/Cap for Left & Right Lower Stabilizing Bar</p>  <p>M6 × 30MM 4 PCS</p>	<p>11</p> <p>Locking Pin Inserts Into Rear Seat Bracket When Reclined</p>  <p>2PCS</p>	<p>12</p> <p>Canopy Tilt Tension Knobs</p>  <p>2PCS</p>	<p>13</p> <p>Spacer for Lower Seat Back</p>  <p>Ø7X15 2PCS</p>	<p>Allen Wrench</p>  <p>Open Ended Wrench</p>  <p>1PCS</p>

Thank you for your purchase!

STEP 1


①

STEP 1: Attach Left Side Top Frame Post (Part A) to Right Side Top Frame Post (Part B) using (2) M6x55mm Bolt/Nut/Cap Sets (Part 6)

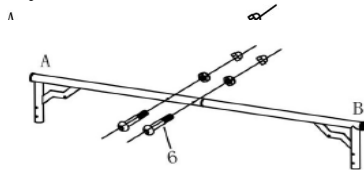

②

STEP 2A: Attach Left & Right Front Legs (Part C) and Left & Right Rear Legs (Part D) to Top Frame using (8) M8x105mm Bolt/Nut/Cap Sets (Part 2).

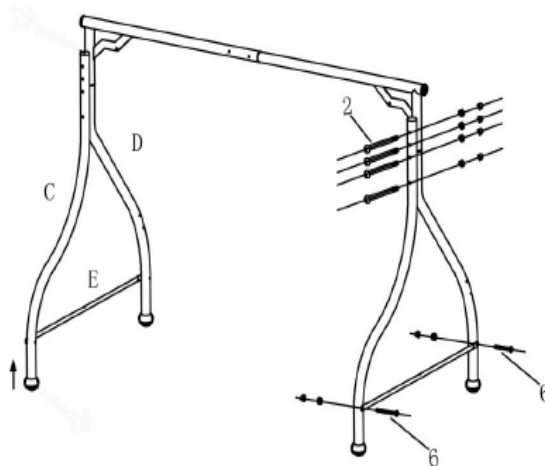


STEP 2B: Attach Left & Right Bottom Braces (Part E) to Front & Rear Legs using (4) M6x55mm Bolt/Nut/Cap Sets (Part 6)

③

STEP 3A: Attach Left Side Upper Stabilizing Bar (Part F) to Right Side Upper Stabilizing Bar (Part G) using (1) M6x30mm Bolt/Nut/Cap Set (Part 10)


STEP 3B: Attach Upper Stabilizing Bar to Rear Legs using (4) M6x60mm Bolt/Nut/Cap Sets (Part 7)

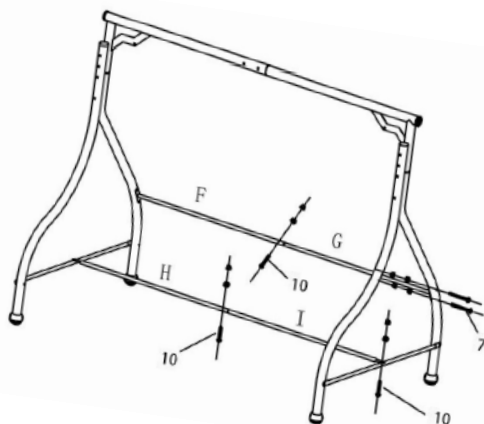

④

STEP 4C: Attach Swing Attachment Bars (Parts J & J1) to Left & Right Swing Arms using (4) M6x35mm Bolt/Nut/Cap Sets (Part 9)

STEP 4D: Attach Rear Seat Bracket (Part Q) to Upper Seat Back using (1) M6x45mm Bolt/Nut/Cap Set (Part 7) **Note: Attach Facing Outward**

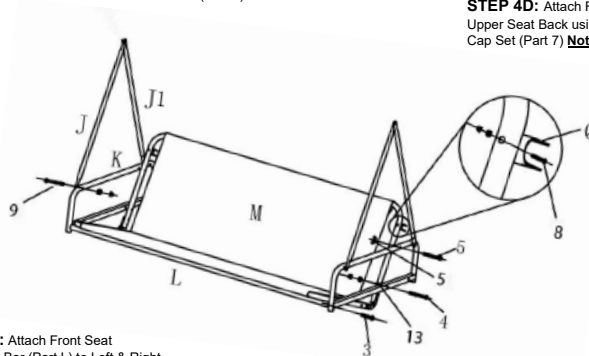


STEP 3C: Attach Left Side Lower Stabilizing Bar (Part H) to Right Side Lower Stabilizing Bar (Part I) using (1) M6x30mm Bolt/Nut/Cap Set (Part 10)

STEP 3D: Attach Lower Stabilizing Bar to Left & Right Side Braces using (2) M6x30mm Bolt/Nut/Cap Sets (Part 10)


STEP 4A: Attach Front Seat Attachment Bar (Part L) to Left & Right Arms using (2) M8x40mm Front Bar Attachment Bolts (Part 3)

STEP 4B: Attach Upper Seat Frame to Left & Right Upper Arms using (2) M6x75mm Bolt and Wing Nut Set (Part 5). Attach Lower Seat Frame to Lower Arms using (2) M6x75mm Bolt/Nut/Cap Sets (Part 4) and (2) Spacers (Part 13)

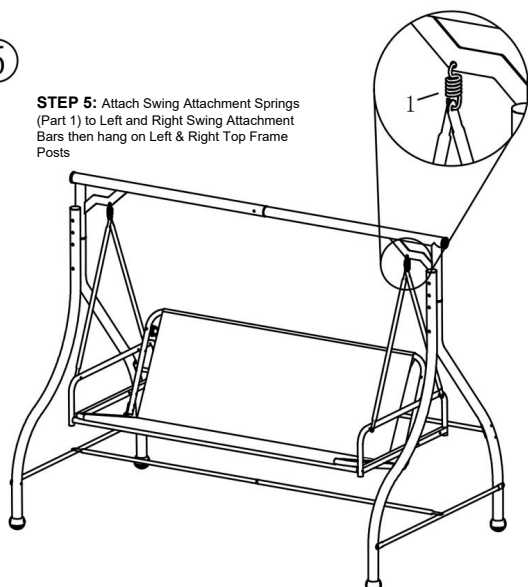

⑥


STEP 6: Attach Left & Right Canopy Frames (Part O) using (2) Canopy Tilt Tension Knobs (Part 12)

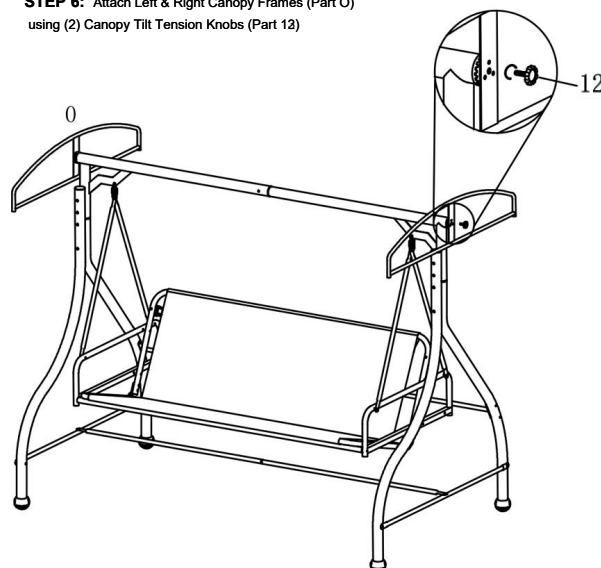

Thank you for your purchase!

STEP 2


7

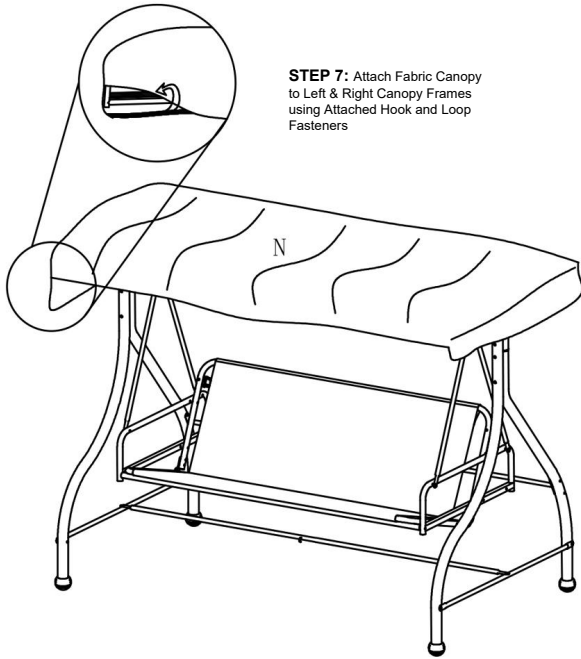


STEP 7: Attach Fabric Canopy to Left & Right Canopy Frames using Attached Hook and Loop Fasteners

8

STEP 8: Position Seat and Back Cushions (Part P)

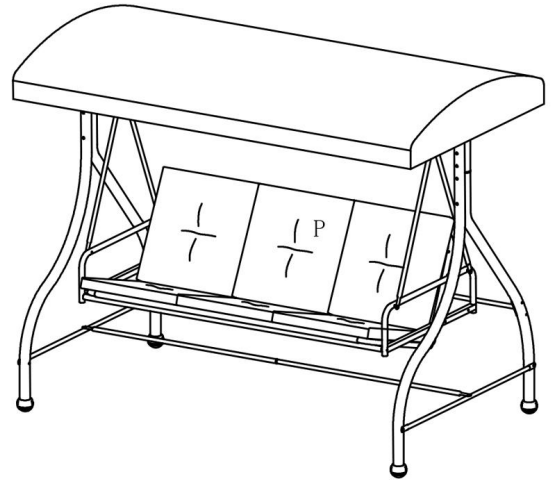

9

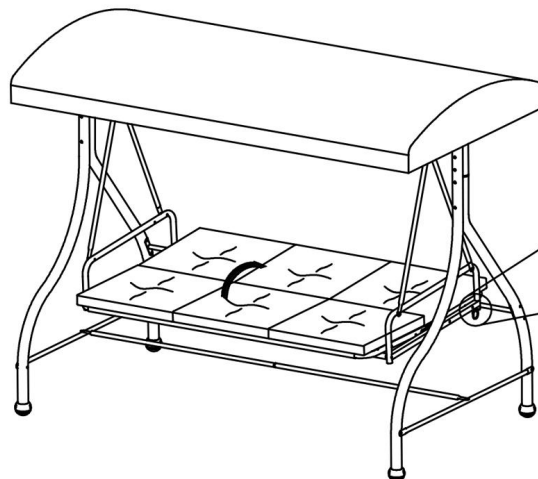


STEP 9 (When Reclined): Insert Locking Pin (Part 11) through Rear Seat Bracket Holes and Fasten Closed. Remove to return seat back to the upright position


11

LOOSEN CANOPY TENSION KNOBS TO ADJUST THE AMOUNT OF TILT. TIGHTEN WHEN PREFERRED ANGLE IS ACHIEVED


10

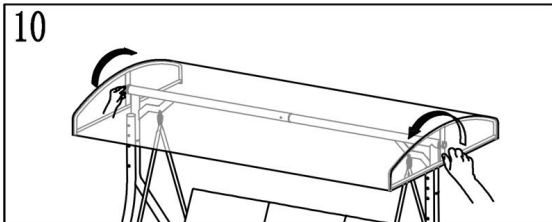


11

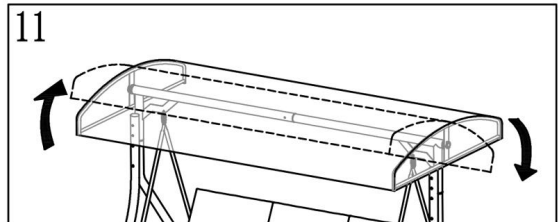

12

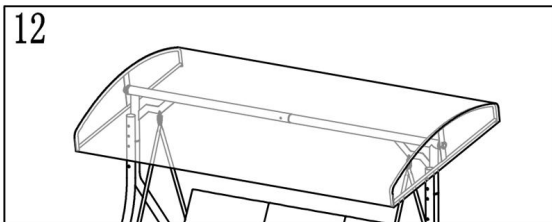

13

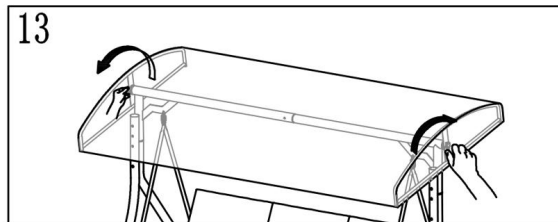

Thank you for your purchase!