


# INSTALLATION INSTRUCTIONS

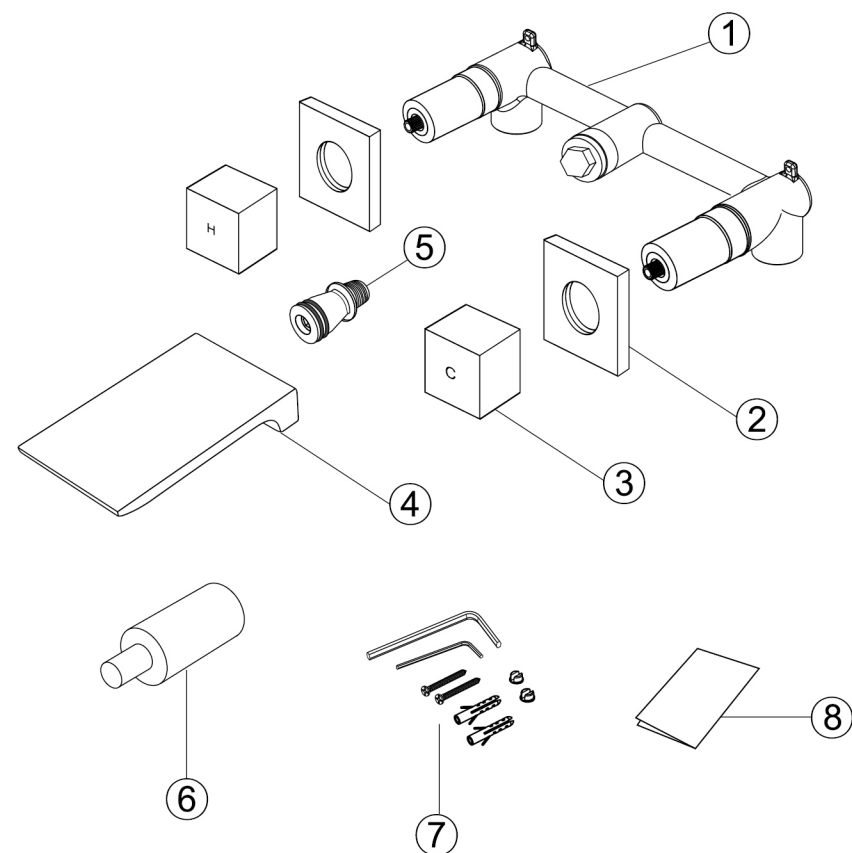

## Parts list


| NO | PART NAME         | QTY | NO | PART NAME        | QTY |
|----|-------------------|-----|----|------------------|-----|
| ①  | Faucet valve body | 1   | ⑤  | Adapter          | 1   |
| ②  | Decorative cover  | 2   | ⑥  | Protection cover | 2   |
| ③  | knob              | 2   | ⑦  | Hardware pack    | 1   |
| ④  | Waterfall spout   | 1   | ⑧  | Instructions     | 1   |

## Instructions for use


1. Turn left knob counterclockwise to turn on hot water. The greater the knob angle, the greater the water flow; Conversely, the smaller the knob angle, the smaller the water flow, until it is closed.

2. Turn right knob clockwise to turn on cold water. The greater the knob angle, the greater the water flow; Conversely, the smaller the knob angle, the smaller the water flow, until it is closed.

( Picture 1 )



( Picture 2 )



## Cautions:

1. Before installation, all water lines must be flushed at least 60 seconds to remove any foreign material so that the foreign material will not block or damage the cartridge.
2. After installation, please check if all connections were well installed, and make sure there are no leakage.
3. Use water and soft cloth to clean the faucet.
4. Use a mild liquid detergent for cleaning, do not use abrasive detergent that may scratch or dull the surface.




### Warning:


**You can seal the wall only when there are no any leakage after install the Faucet valve body and water pipes.**

# INSTALLATION INSTRUCTIONS


1. Use tool to chisel holes on wall for installing faucet valve body and water pipes

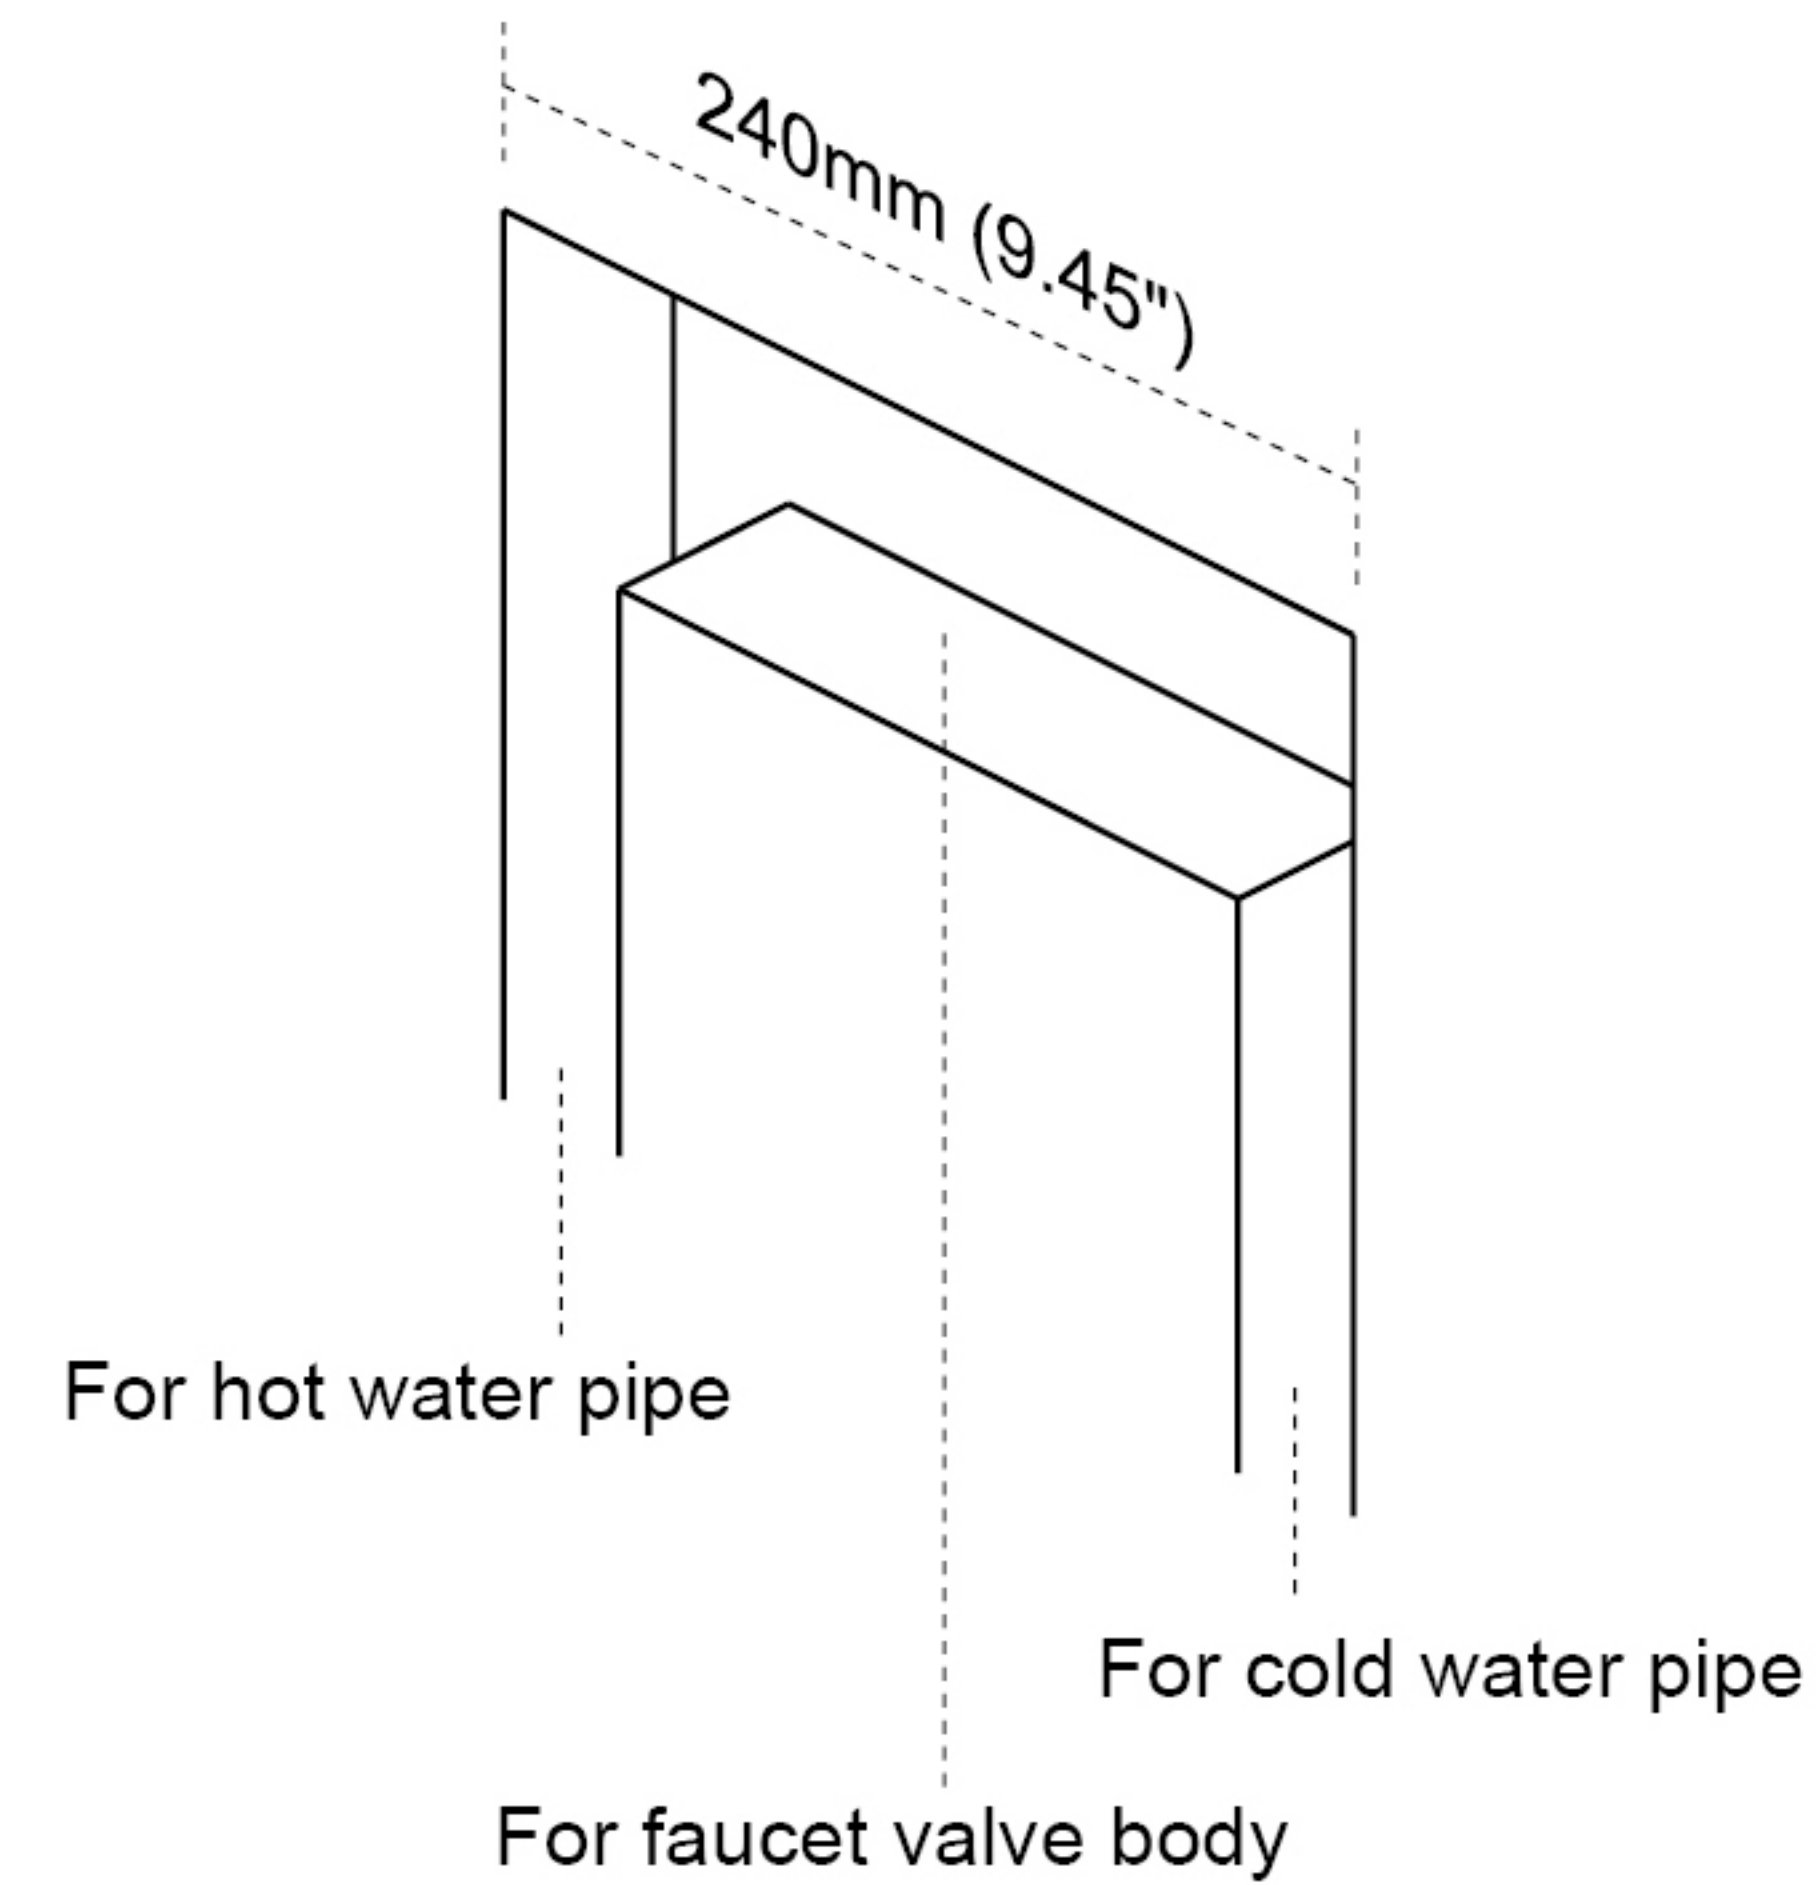


2. The installation depth from the bottom of faucet valve body to ceramic tile surface is as shown in the figure below

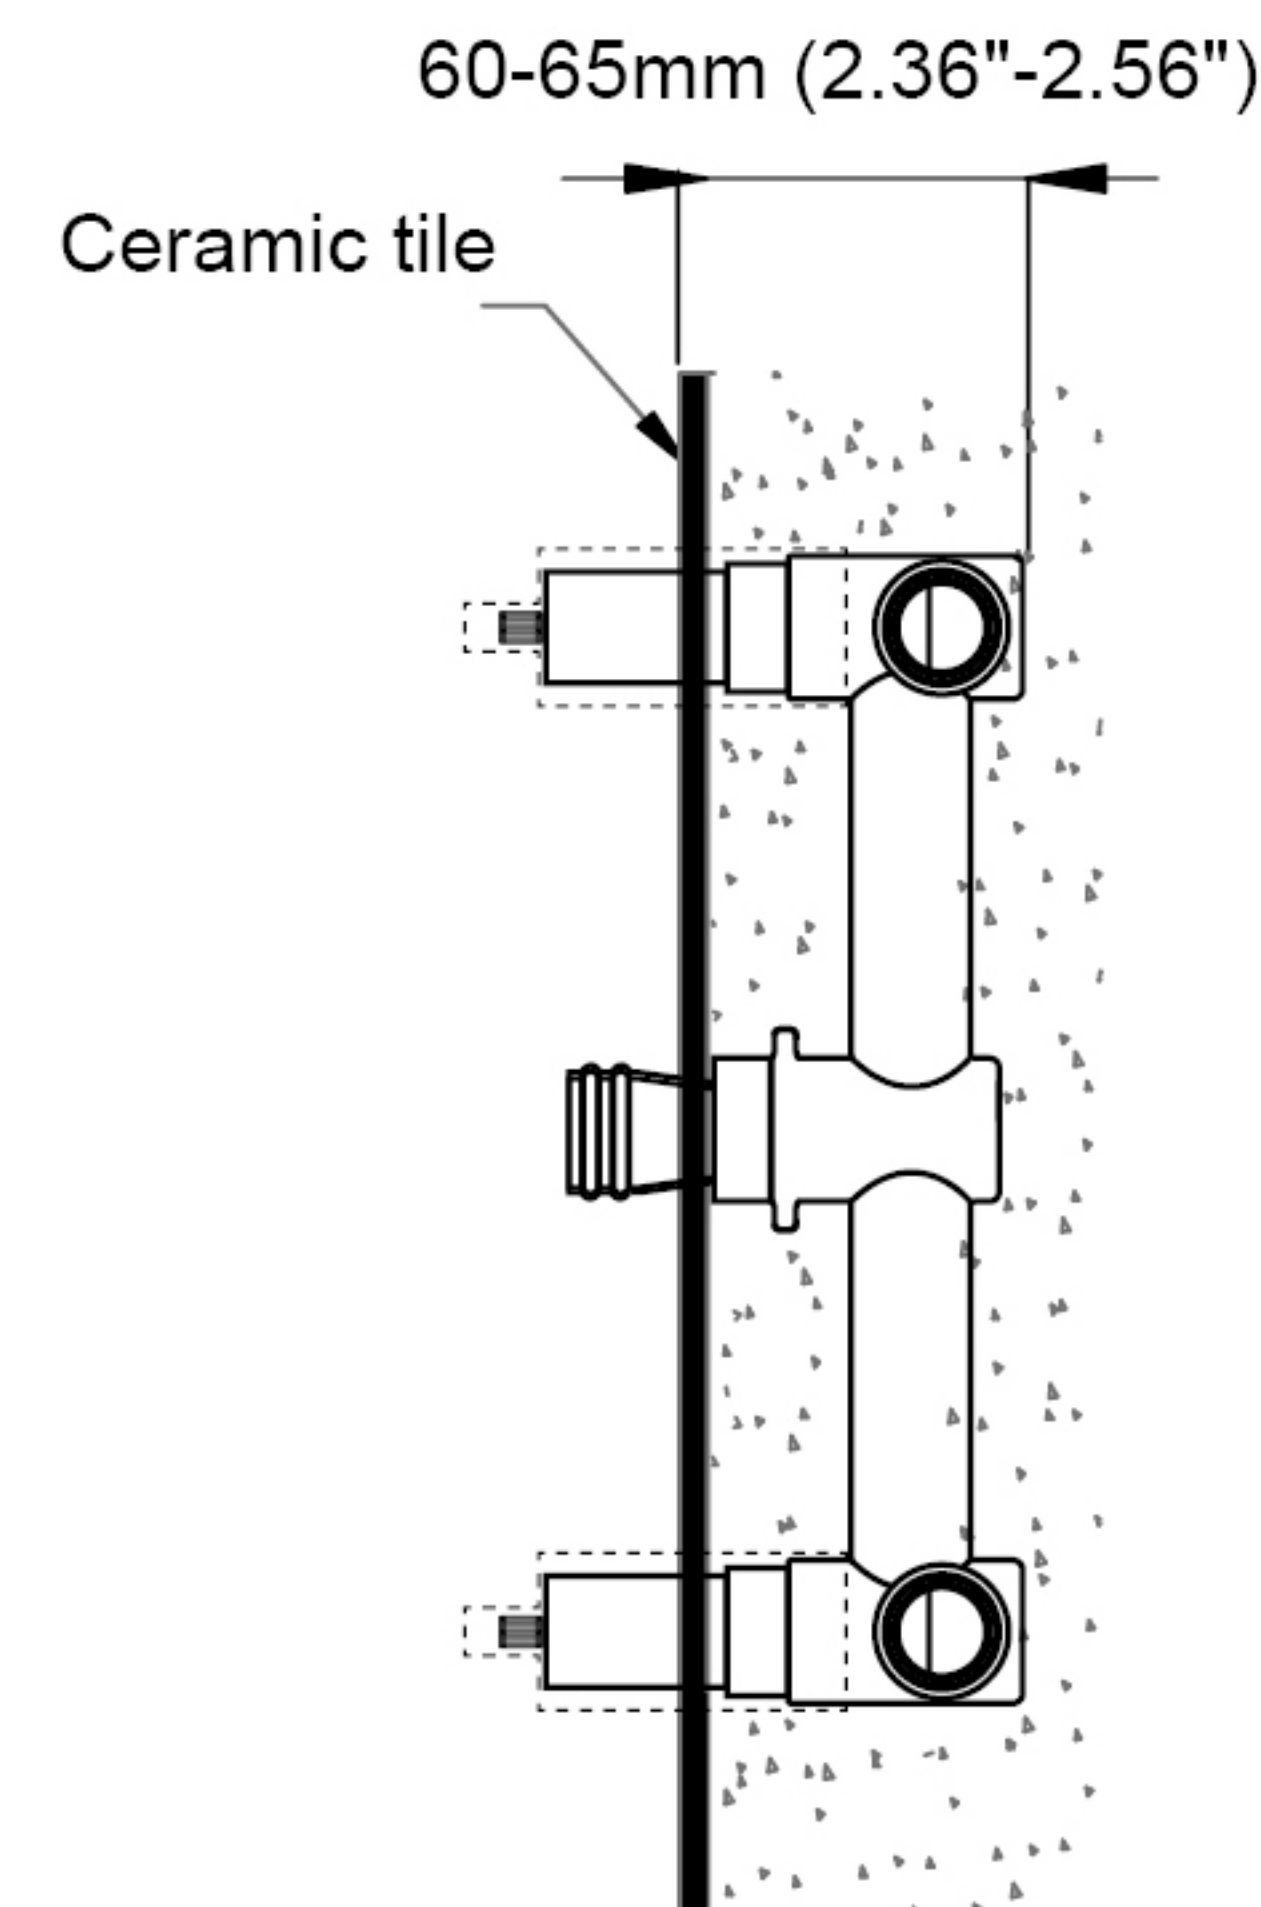


3. Install faucet valve body and secure it with screws; Install hot and cold water supply hoses to faucet valve body

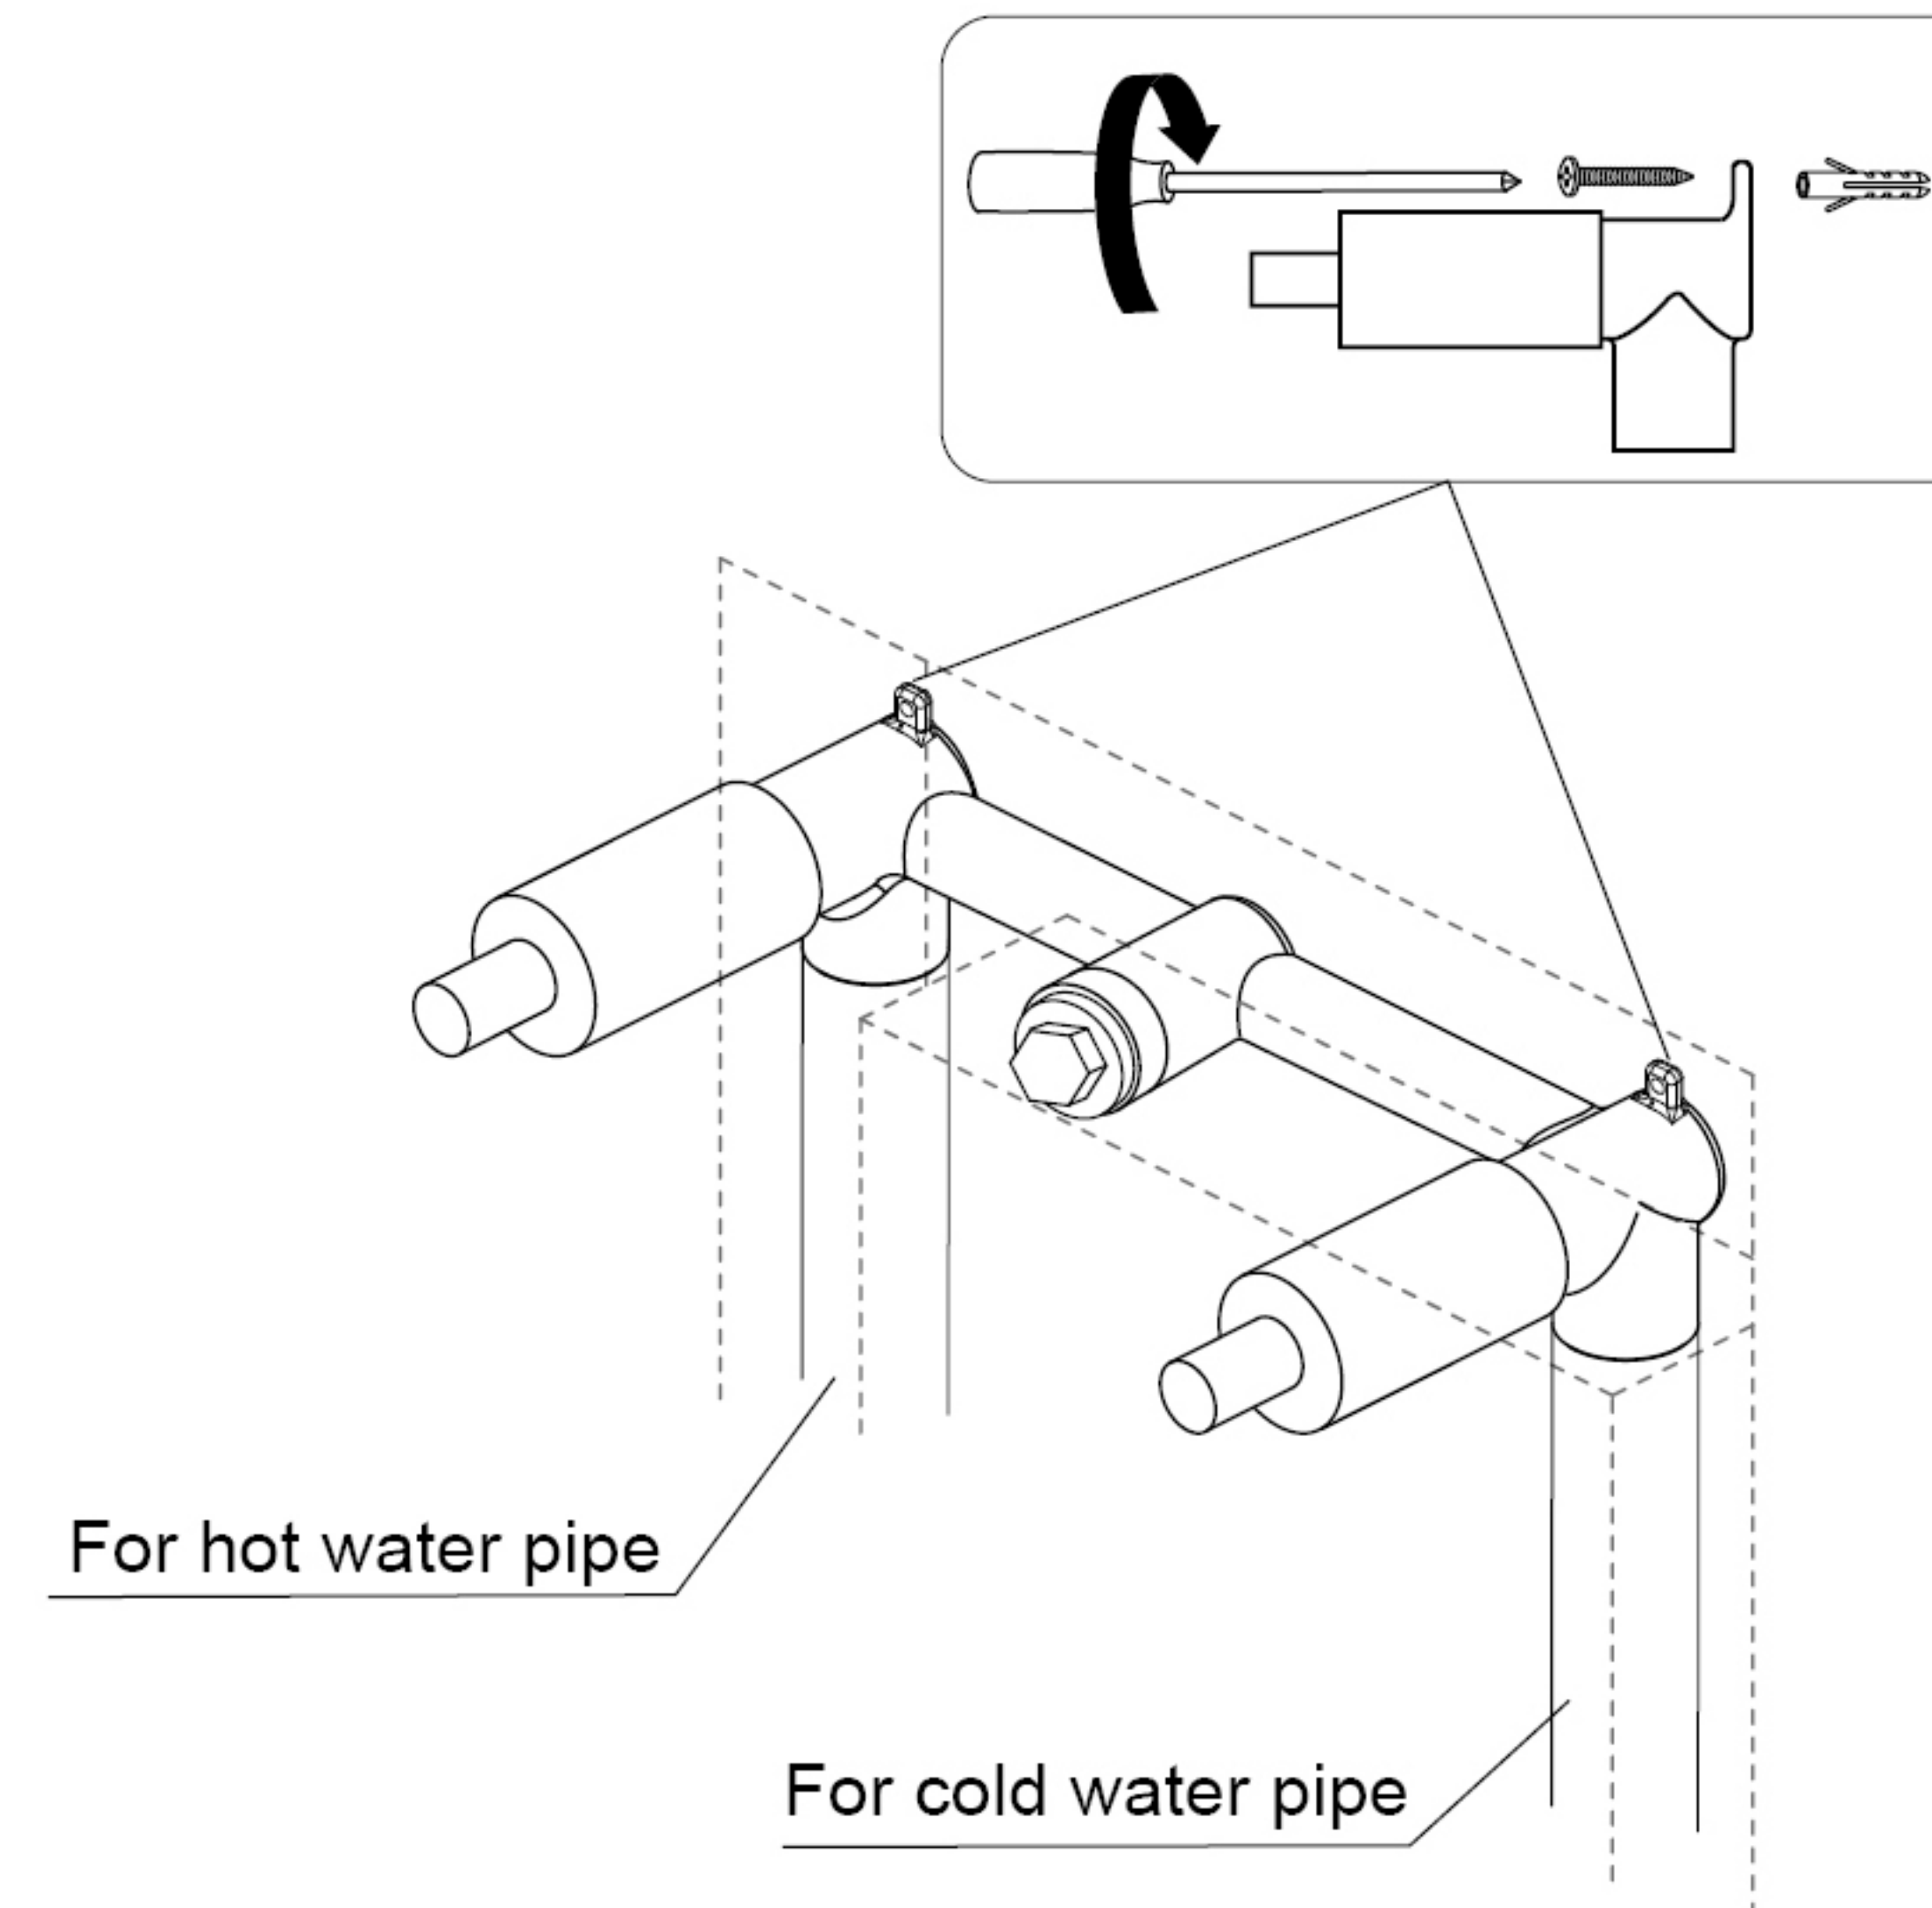


4. Drill holes in ceramic tile, opening size for knobs and spout: 30-35mm (1.18"-1.38")  
Then sealing wall with ceramic tile

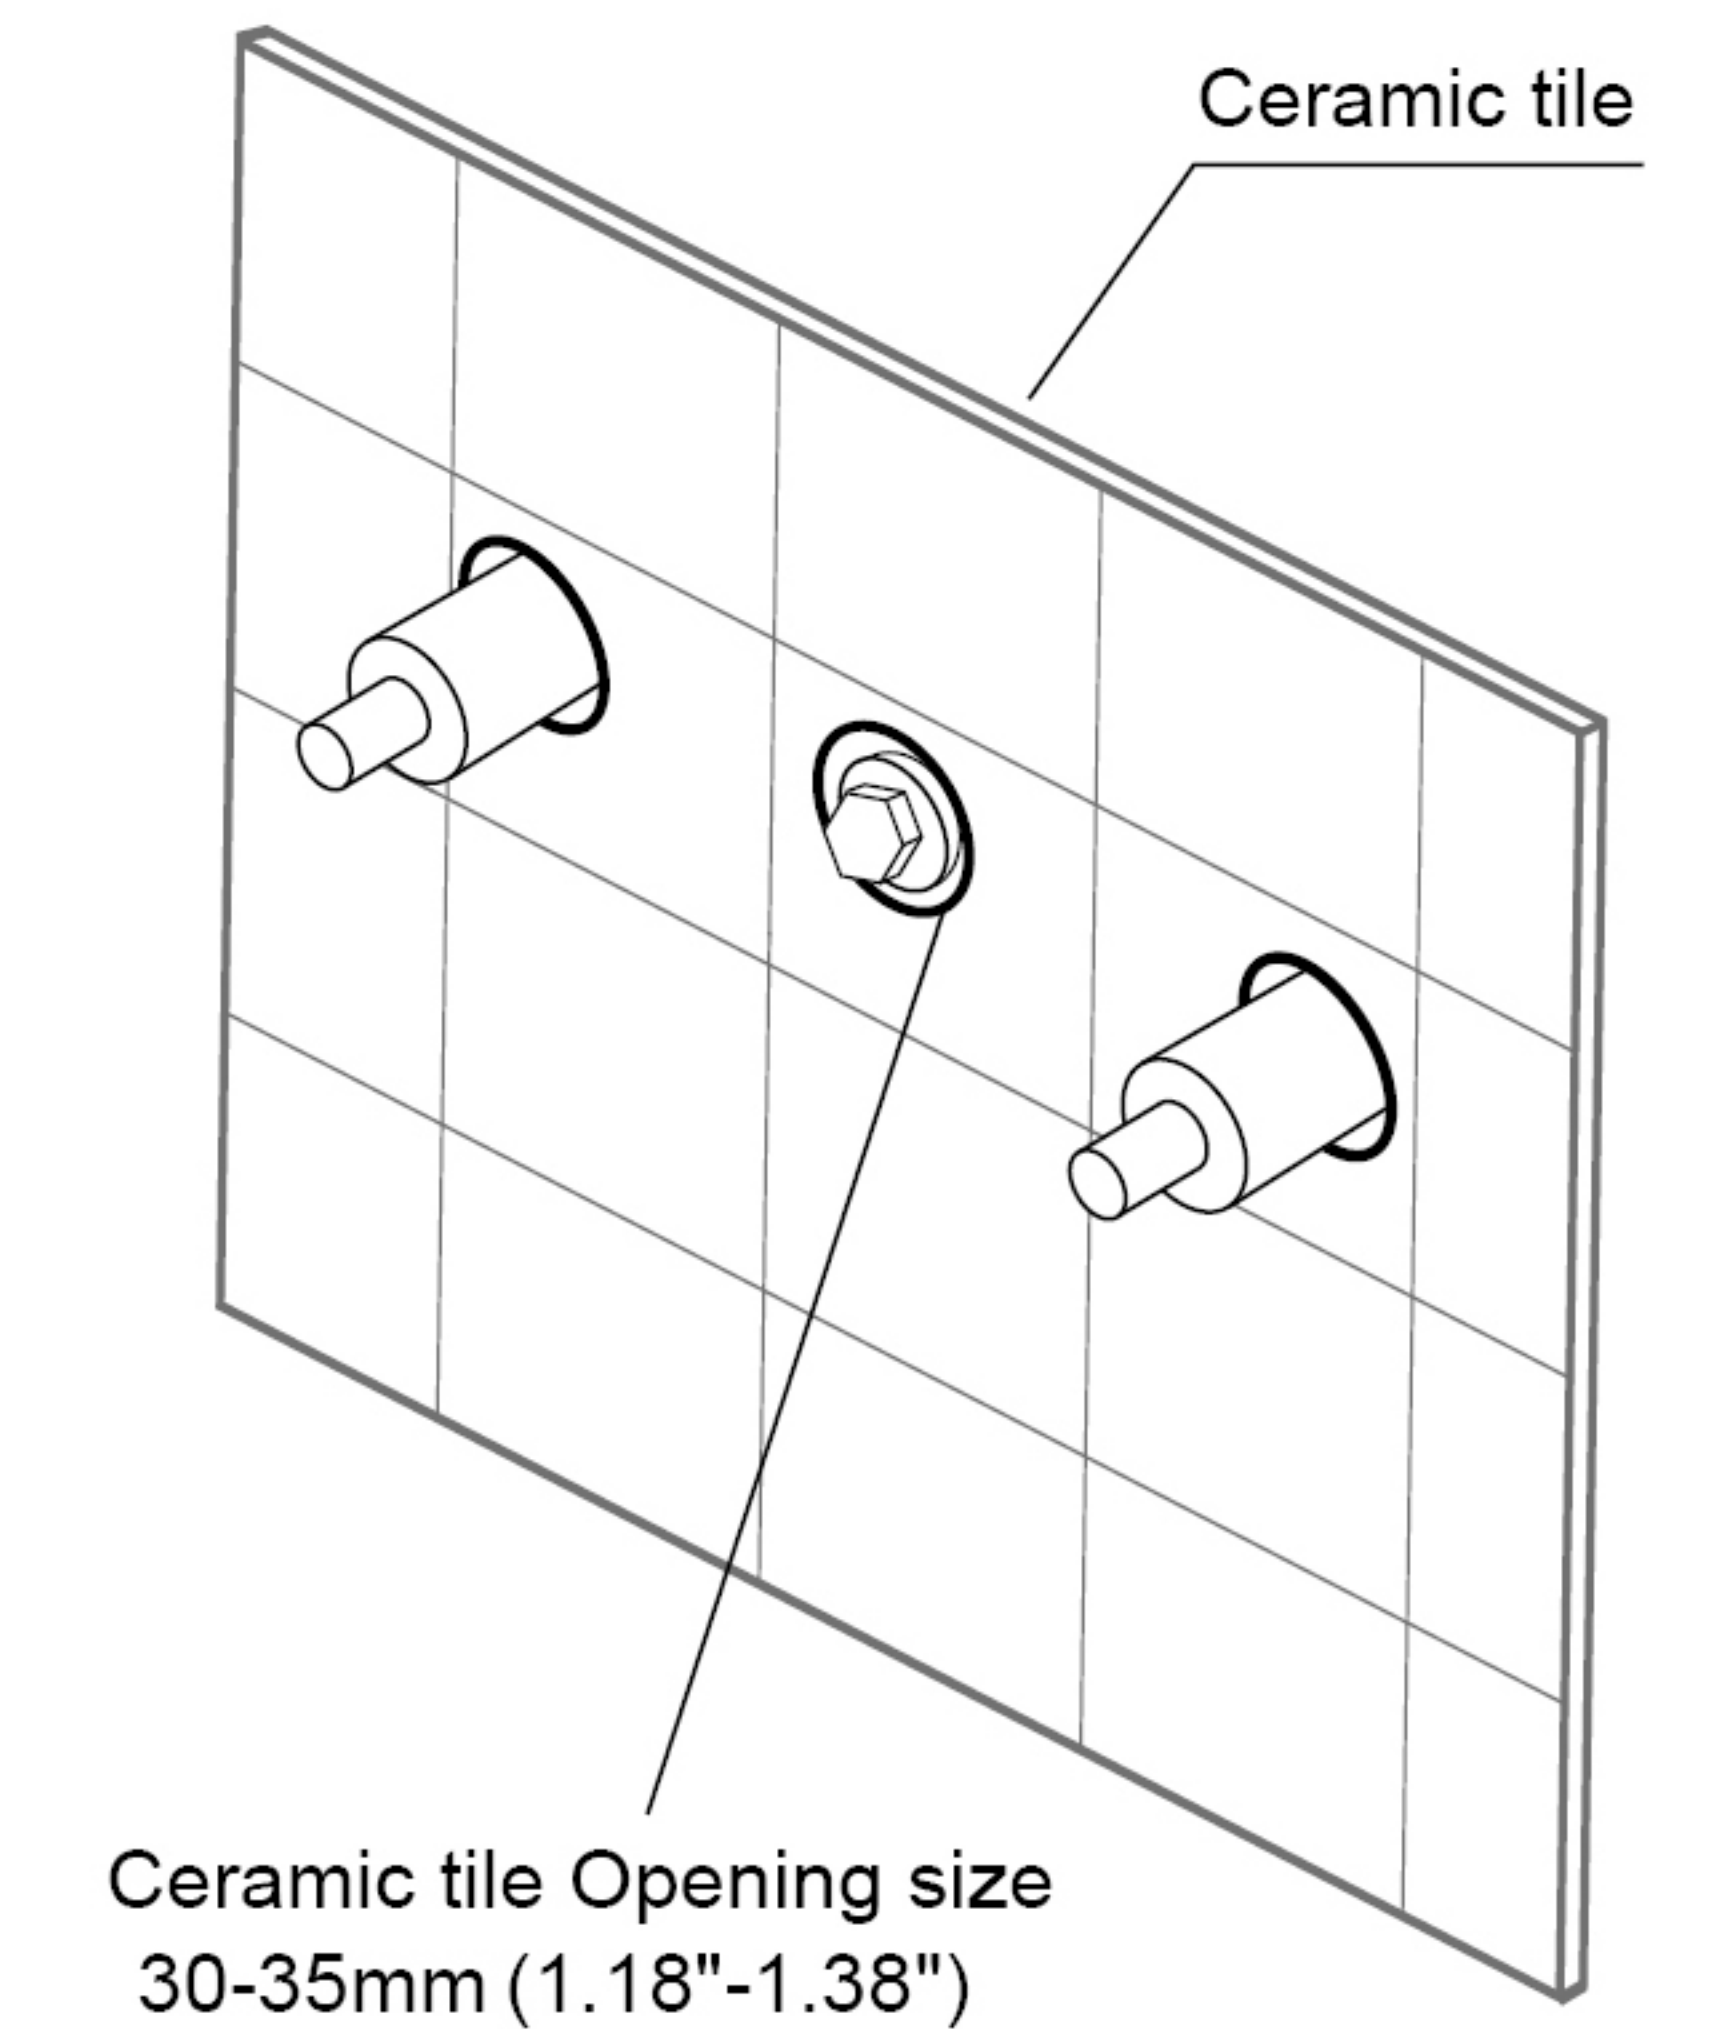


5. Remove plug and use allen wrench to install quick thread connector into faucet valve body; Remove protection covers, turn on water 60 seconds to flush away impurities inside the water pipe

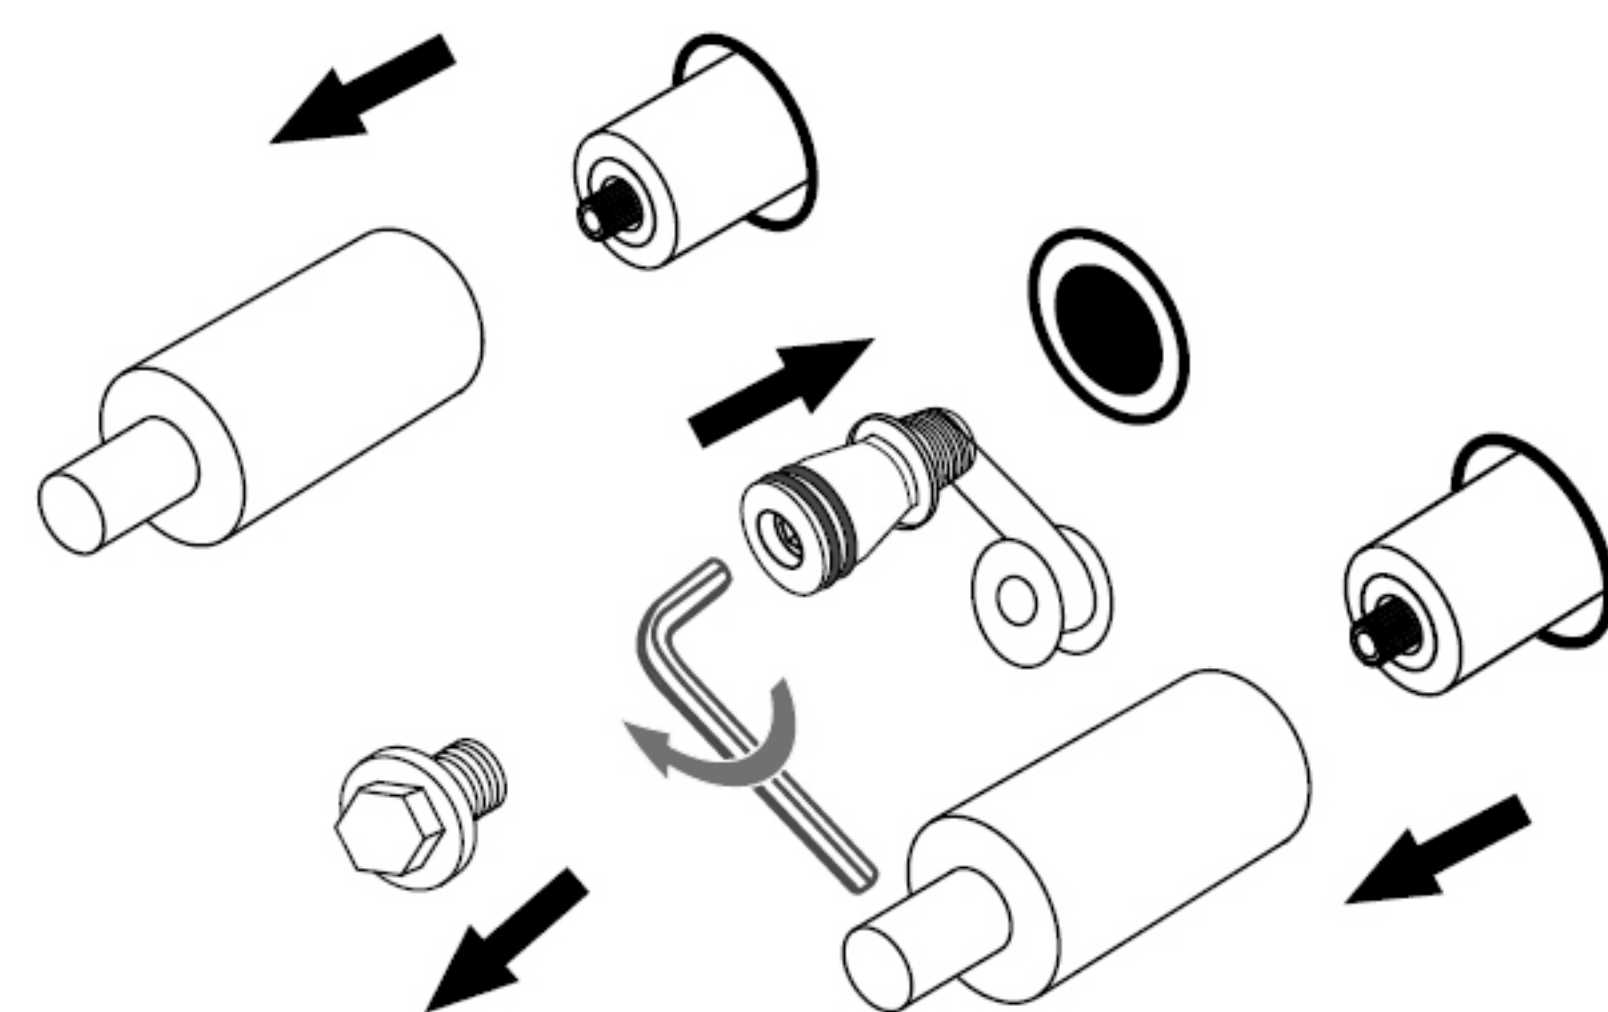

6. Install decorative covers, knobs and spout

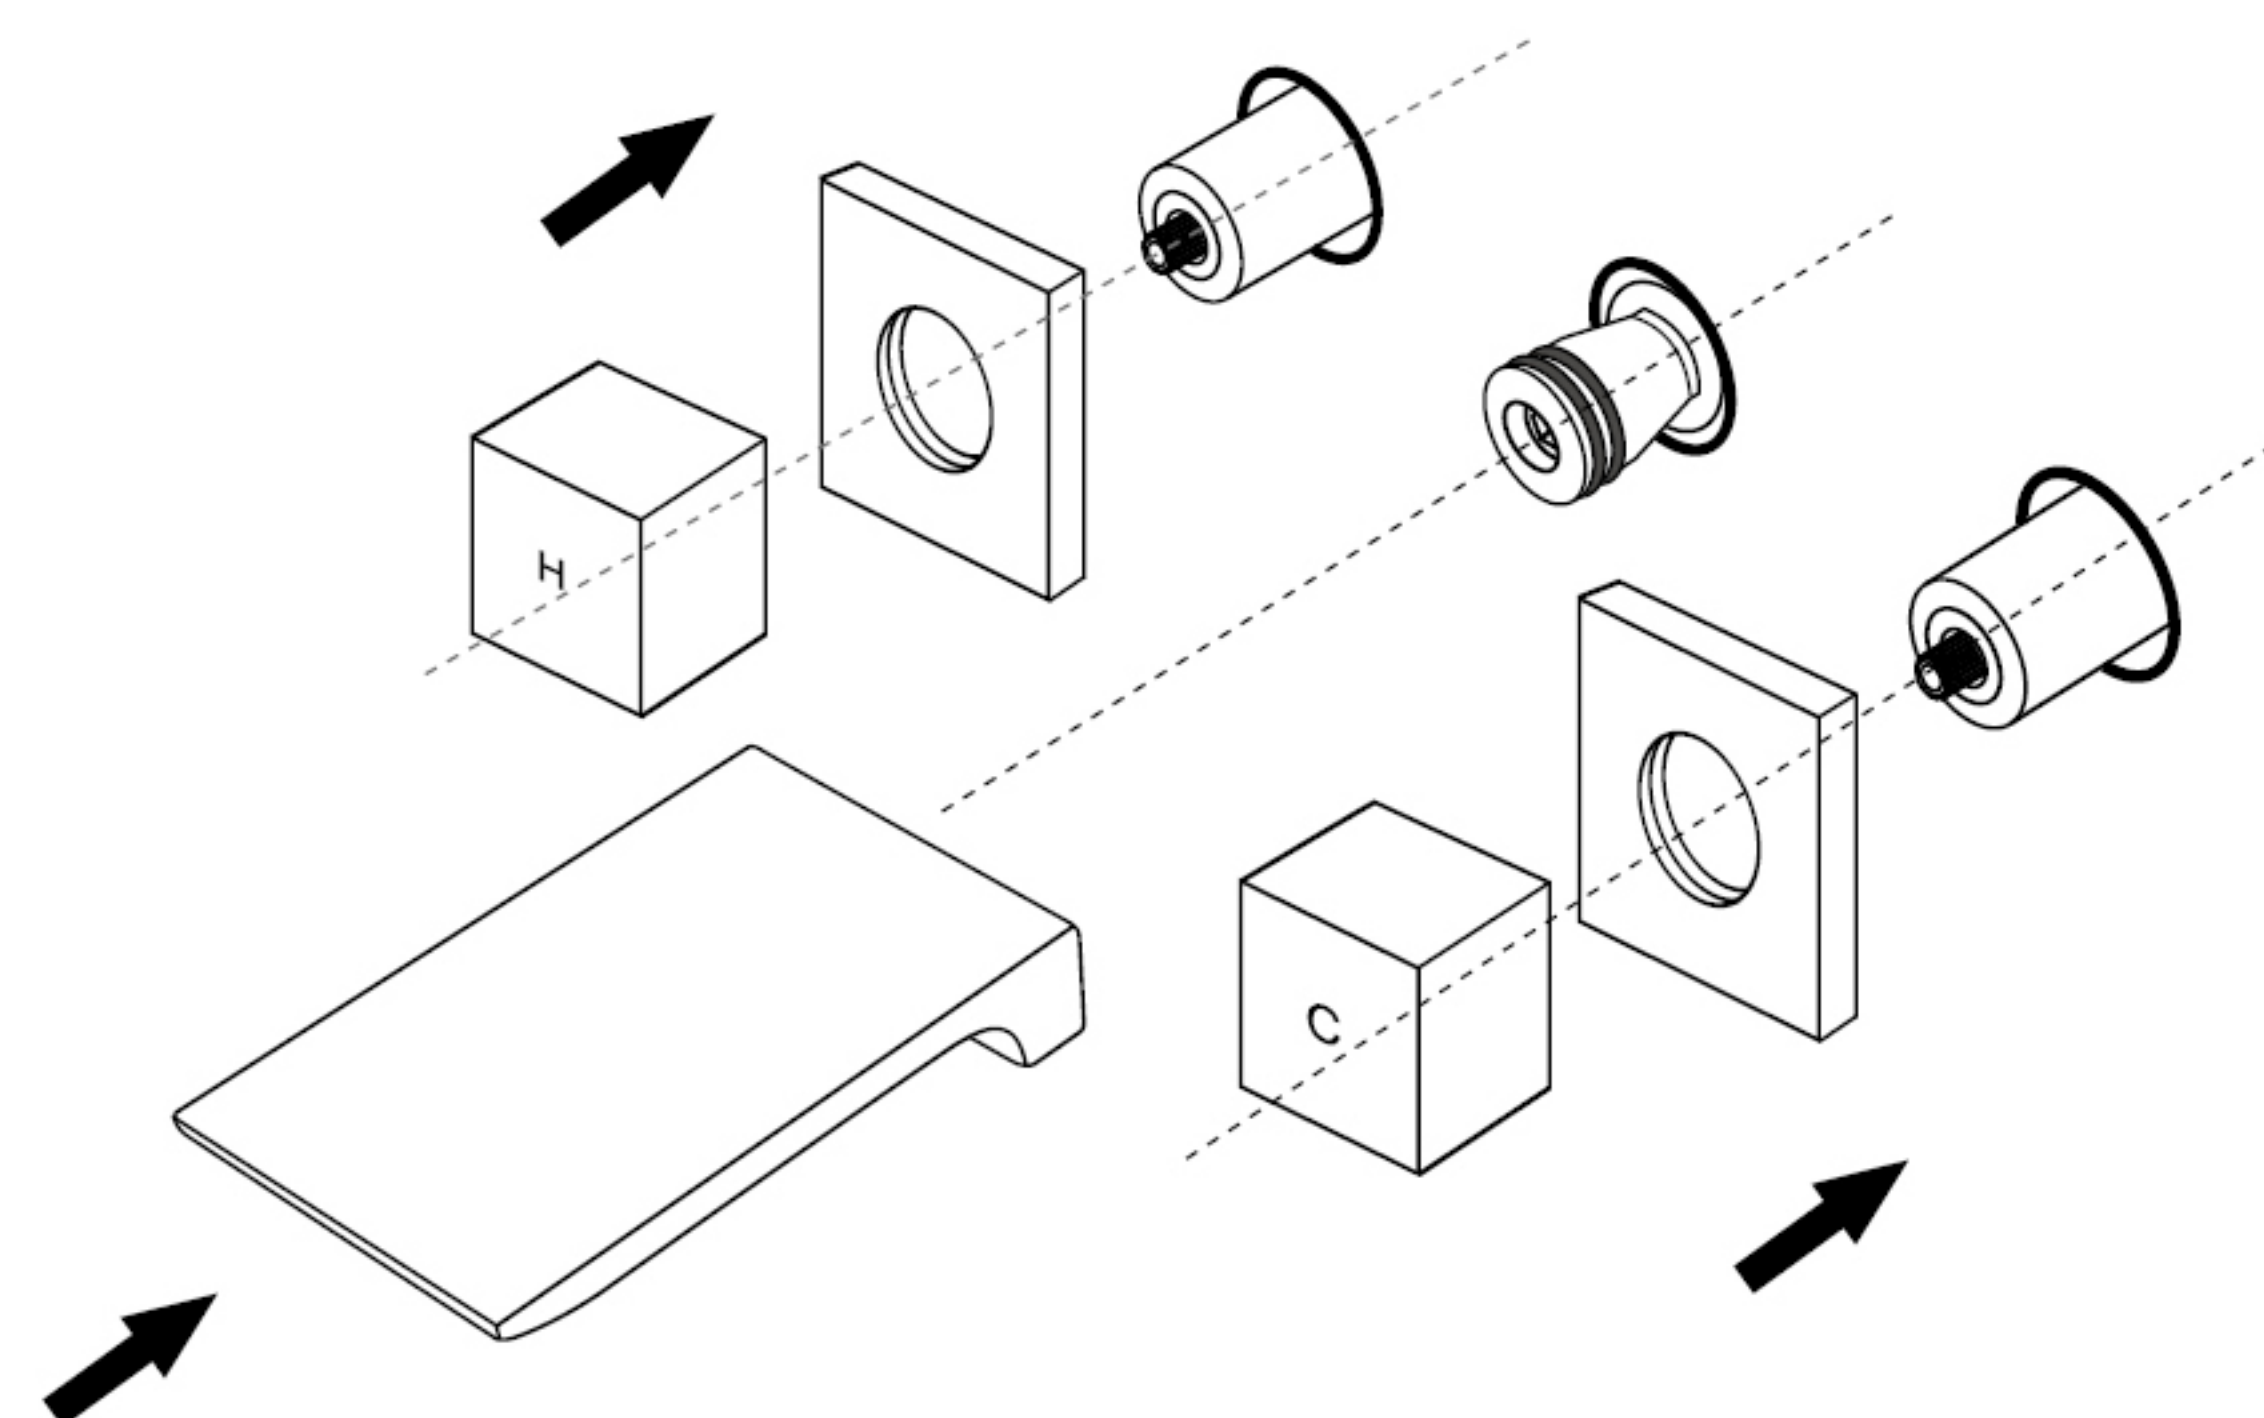

7. Secure knobs and spout with screws

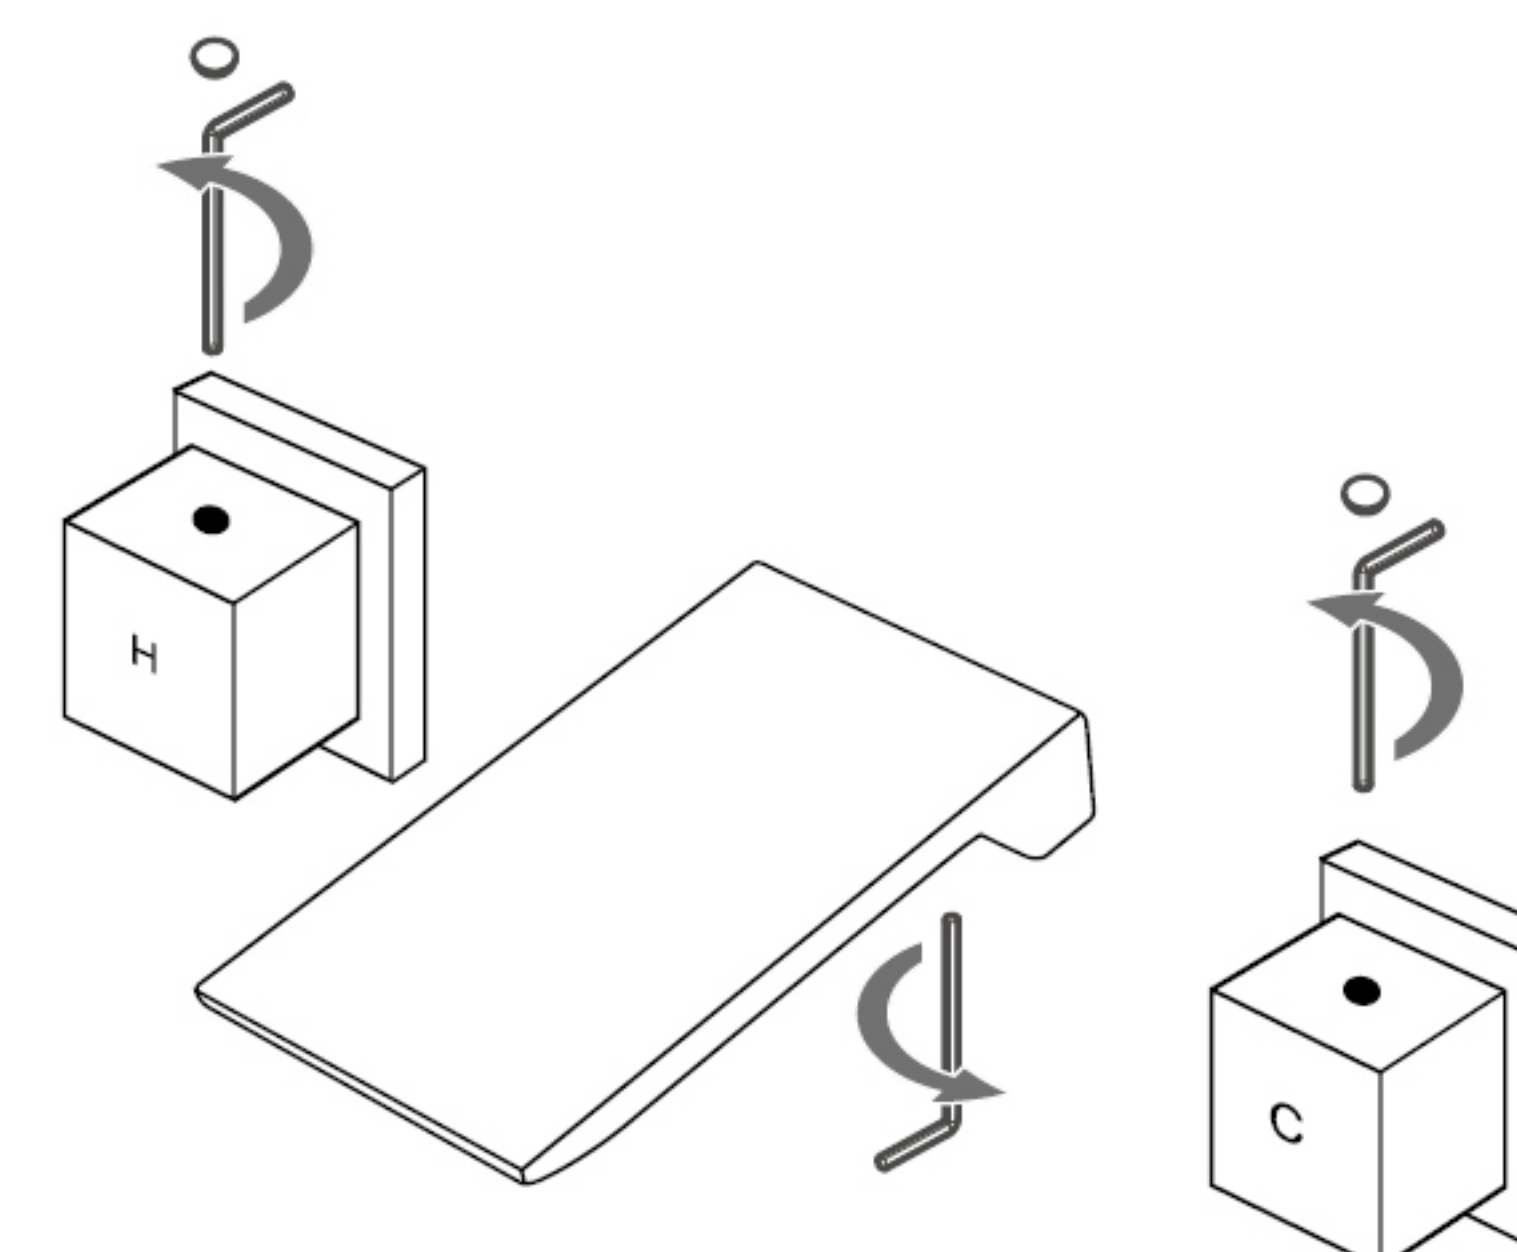

8. Turn on faucet, check for leakage

