


Instruction Manual

Mini Pendant Lighting



Cautions

CAUTION – RISK OF SHOCK – Disconnect Power at the main circuit breaker panel or main fuse box before starting and during the installation.

WARNING:

This fixture is intended for installation in accordance with in National Electrical Code(NEC) and all local code specifications.If you are not familiar with code requirements,installation by a certified electrician is recommended.


NOTE direction of swivel in accordance with ceiling.

Installation Instructions

TIPS:Thread all stems and then mount it to ceiling first,put the glass on at last.

- 1.Slip cap up over end of bottom stem.
- 2.Thread that end of bottom stem onto top of fixture body.
- 3.Pass fixture wire through remaining stems and screw stems together.
 - NOTE:**Thread locking compound must be applied to all stem threads as noted with symbol (◄) to prevent accidental rotation of fixture during cleaning,relamping,etc.
- 4.Thread canopy onto end of last stem.
- 5.Find the appropriate threaded holes on mounting strap.Assemble mounting screws into threaded holes.
- 6.Attach mounting strap to outlet box.Mounting strap can be adjusted to suit position of fixture.
- 7.Grounding instructions:(See IIIus.A or B).


- A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw,and thread into hole.
- B) On fixtures where a cupped washer is provided.Attach ground wire from outlet box under cupped washer and green ground screw,and thread into mounting strap.
- If fixture is provided with ground wire.Connect fixture ground wire to outlet box ground wire with wire connector after following the above steps.Never connect ground wire to black or white power supply wires.

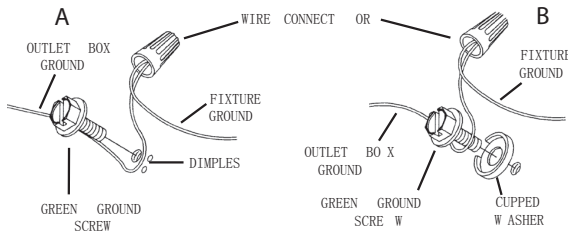

8.Make wire connections.Reference chart below for correct connections and wire accordingly.


Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 9.Push fixture to ceiling,carefully passing mounting screws through holes in canopy.
- 10.Secure fixture to ceiling with knobs.
- 11.Raise glass up towards fixture.Pass small hole in top of glass over socket.
- 12.Once the glass is raised over the slotted coupler,insert the clear washer and steel washer into the slot of the slotted coupler as shown.
- 13.Lower glass onto the clear washer and steel washer.

Product Specifications

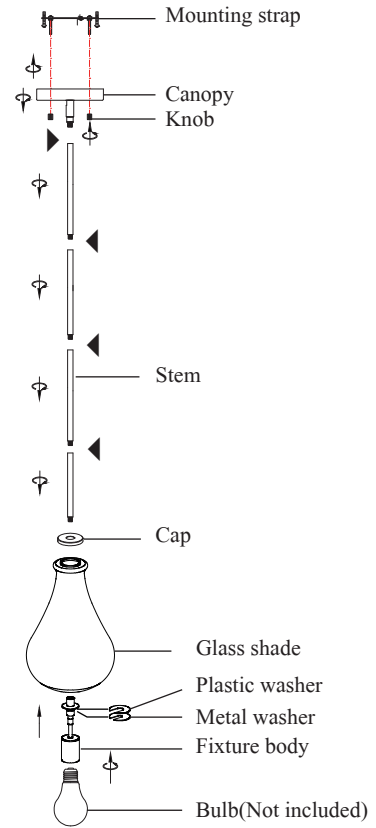

Product Specifications

- Input voltage 120V
- Rated power 60W MAX
- Lamp socket E26
- Cord Length 10 feet

Product Packaging

- Fixture body × 1
- Stem × 4
- Canopy × 1 & Mounting strap × 1
- Screw × 2 & Wire nut × 3
- Screw × 2 & Knob × 2
- Cap × 1
- Metal washer × 2 (1 extra set as spare part)
- Plastic washer × 2 (1 extra set as spare part)
- Glass shade × 1
- Lamp instruction × 1

Safety Information

Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

CONTACT US

E-mail:service@24h-reply.com

Print in china