EASY TO INSTALL



1. DIG THE POST HOLE

Dig post hole slightly wider than the FootingPad® diameter and deeper than the frostline or 24 inches deep (whichever is greater).



2. LEVEL AND COMPACT THE BOTTOM

Use a 2x4 or other tool to level and compact the soil at the bottom of the hole.



3. PLACE THE FOOTINGPAD®

Place FootingPad® in the bottom of the hole, smooth side down.



4. PLACE THE POST

Place post in the hole approximately centered on top of the FootingPad®.



5. BACKFILL

Backfill around the post with the original soil. No concrete required.



6. COMPACT SOIL AND CHECK ALIGNMENT

Compact the backfill around the post every 12 inches as you fill the hole. Use a level to ensure the post is straight.

BUILDING CODE COMPLIANT

FootingPad® post footings are independently tested and certified to meet International Code Council building code standards.

The ICC-ES Evaluation Report (ESR-2147) can be downloaded from footingpad.com/ICC.

IMPORTANT

ICC ES ESR-2147

Please provide a printed copy of the ESR report to your building inspector, as this is the common method to show code compliance.

MADE IN USA **Limited Lifetime Warranty**

FOOTINGPAD® POST FOOTINGS

800-522-2426 | FOOTINGPAD.COM

©2025 FootingPad® All Rights Reserved. 25-FPAD-004

ADVANCED COMPOSITE FOOTINGS

SUPPORT UP TO 9,327 LBS!

BUILDING-CODE COMPLIANT FOR POST-FRAME BUILDINGS, DECKS, AND CRAWL SPACES

ICC ES ESR-2147

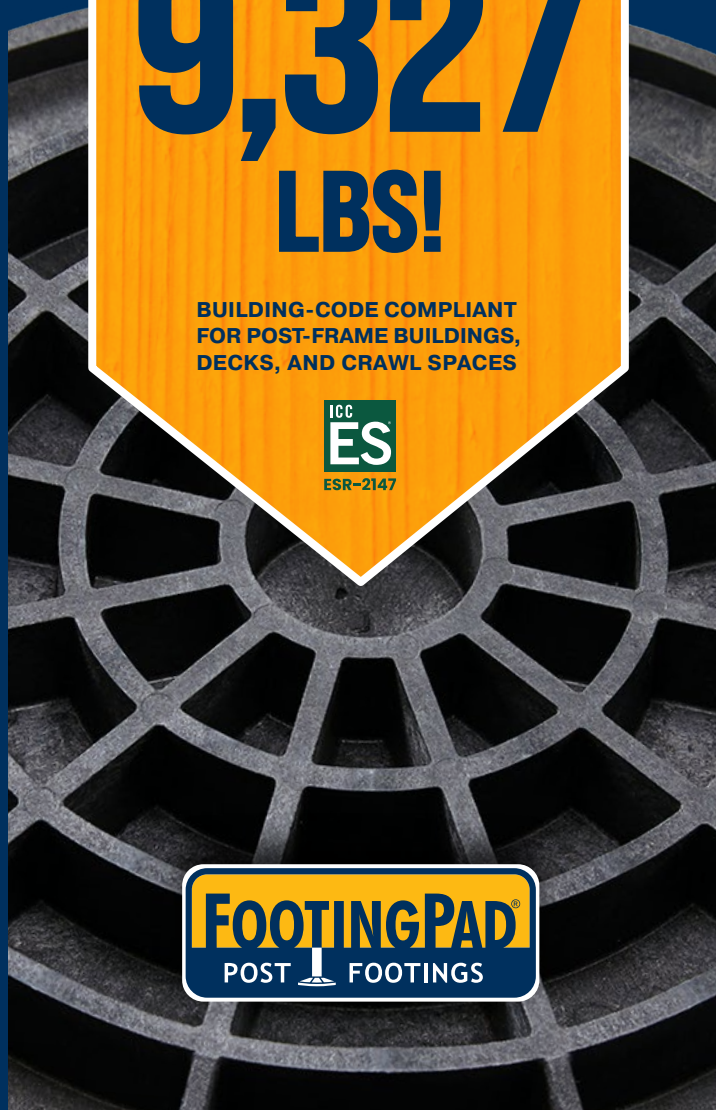

FOOTINGPAD® POST FOOTINGS

SUPERIOR TO CONCRETE

FootingPad® footings are easy to handle, quick to install, and engineered for lasting durability—unlike traditional concrete which is heavy, messy to mix, slow to cure, and prone to cracking. Get the job done faster with the proven-performance of FootingPad® footings.









FOOTINGPAD® POST FOOTINGS



©2025 FootingPad®

HIGH-STRENGTH DESIGN

FootingPad® footings are engineered with a high-performance, fiber-reinforced composite that's stronger, lighter, and more reliable than concrete. FootingPad® load capacities were determined by an independent lab and validated by the International Code Council (ICC).

MULTIPLE USES

ICC ES ESR-2147

FootingPad® footings are constructed to support a broad range of projects. ICC-ES certified for multiple post types: treated wood, laminated columns, pre-cast and poured concrete, and jack posts. Designed for versatility. Proven to perform.

DIAMETER	WEIGHT	ALLOWABLE LOADS*			
		1,500 PSF SOIL	2,000 PSF SOIL	2,500 PSF SOIL	3,000 PSF SOIL
10"	1 lb.	810 lbs.	1,081 lbs.	1,351 lbs.	1,622 lbs.
12"	2 lbs.	1,126 lbs.	1,536 lbs.	1,946 lbs.	2,356 lbs.
16"	4 lbs.	2,009 lbs.	2,739 lbs.	3,470 lbs.	4,200 lbs.
20"	9 lbs.	2,687 lbs.	3,973 lbs.	5,259 lbs.	6,545 lbs.
24"	13 lbs.	4,013 lbs.	5,784 lbs.	7,556 lbs.	9,327 lbs.

*Maximum load based on the psf soil capacity noted

Load calculator available at footingpad.com