



33" top-/undermount single-bowl kitchen sink K-R31466-2AC

Features

- 36" (914 mm) minimum base cabinet width
- Single bowl
- 9" (229 mm) depth provides generous workspace
- Rounded corners are easy to clean.
- SilentShield® sound-absorption technology offers quieter performance
- Angled edge allows for easy sweeping of food or water from countertop to bowl
- Two faucet holes
- Large acacia wood cutting board enhances food prep and cleanup
- Roll-up drying rack provides a convenient shelf for drying. rinsing, and defrosting
- Optional K-31473 bottom sink rack and K-28178 silicone sink ASME A112.19.3/CSA B45.4 mat sold separately
- Box includes: Sink, acacia wood cutting board, roll-up drying rack, installation hardware

Material

- Premium 18-gauge stainless steel
- KOHLER stainless steel sinks resist corrosion and tarnishing

Installation

- Top-mount or undermount
- Cutting board and roll-up drying rack rest on sink deck when sink is top-mounted or on countertop when undermounted

Recommended Products/Accessories

K-8801 Sink drain and strainer with tailpiece

K-8799 Sink drain and strainer basket

K-31473 Sink rack

K-28178 Silicone sink mat

K-23726 Drain treatment

K-23729 Stainless steel cleaner

Optional Products/Accessories

K-11352 Disposal Flange with Stopper

Included Components

K-28906 Acacia cutting board K-28929 Roll-up multipurpose rack



Codes/Standards


KOHLER® Stainless Steel Sinks Lifetime Limited Warranty

See website for detailed warranty information.



Prologue®

33" top-/undermount single-bowl kitchen sink K-R31466-2AC

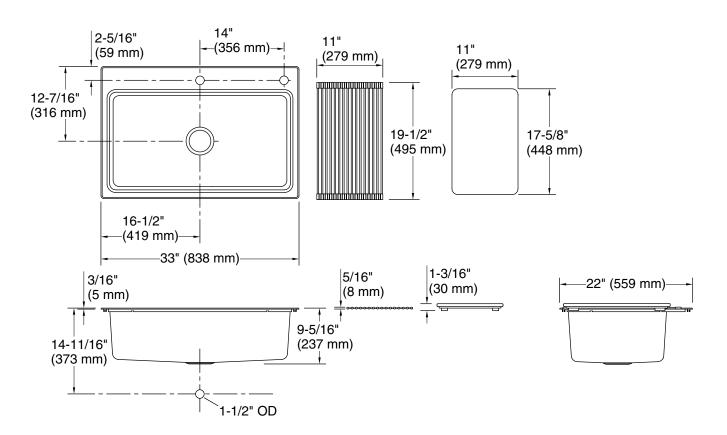

Technical Information

All product dimensions are nominal.

Basin configuration: Single Bowl Min. base cabinet 36" (914 mm)

width:

Bowl area (Only): Length: 30" (761 mm)

Width: 16-1/8" (410 mm) Bowl depth: 9" (229 mm) Water depth: 9" (229 mm)

With overflow: No Number of deck 2

holes:

Faucet hole(s): 1-7/16" (37 mm)
Drain hole: 3-5/8" (92 mm)

Template: Top-mount/Undermount, 1442591-7, not

required, included

Notes

Install this product according to the installation instructions.

