

*Lights of America®*

## Portable Cabinet Lamp

Model: 7613S-XXX Series Rated: 120V~ 60Hz 3W 0.035A  
Model: 7618S-XXX Series Rated: 120V~ 60Hz 4.5W 0.055A  
Model: 7624S-XXX Series Rated: 120V~ 60Hz 6W 0.07A

## WARNING

Deviation from the assembly instructions may result in a risk of fire or electric shock. Please read and understand this instruction sheet before attempting to assemble, operate or install the product.

### CAUTION:

To reduce the risk of fire, electric shock or injury to persons:

- Use in dry location only.
- Use only insulated staples or plastic ties to secure the cords.
- Route and secure cords so that they will not be pinched or damaged when the cabinet is pushed to the wall.
- Not intended for recessed installation in ceilings or soffits.
- The National Electrical Code (NEC) does not permit cords to be concealed where damage to insulation may go unnoticed. To prevent fire danger, do not run cord behind walls, ceilings, soffits, or cabinets where it may be inaccessible for examination. Cords should be visually examined periodically and immediately replaced when any damage is noted.
- Injury to persons and damage to the fixture or mounting surface may occur. If the fixture is not mounted to a mechanically sound surface.
- Do not install directly over a heat source (stove, etc..)
- WHEN INSTALLING MULTIPLE LUMINAIRES THE TOTAL AMPS SHOULD NOT EXCEED 0.75A.
- LINK ONLY WITH LIGHTS OF AMERICA MODELS 7613S-XXX, 7618S-XXX, 7624S-XXX.

## IMPORTANT SAFETY INSTRUCTIONS

This product has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug or power supply cord in anyway.

### NOTE:

1. To install onto a plaster board surface, we recommend minimum 3/8" thick.
2. For multiple lamps installation lamp fixtures shall be within 35" (inches) apart.
3. This product may cause interference with radios, televisions, telephones or remote controllers. If interference occurs move this product away from device or plug into another outlet.

### FIVE (5) YEAR LIMITED WARRANTY

Lights of America (LOA) warrants that this product will be free from defect in material and workmanship for a period of five (5) years from the date of purchase and agrees to replace or repair the defective product. Product must be purchased from an LOA authorized retailer or seller. The limited warranty is contingent upon normal, intended, and proper use, installation, transportation, and storage of the product in reasonable conditions without alteration or modification. Defective products under warranty should be returned with the original proof of purchase and prepaid postage to: Lights of America, Inc., Attn: Consumer Affairs Dept., 611 Reyes Drive, Walnut, CA 91789. Original proof(s) of purchase required. THIS LIMITED WARRANTY IS IN LIEU OF ANY OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR OTHER SIMILAR STANDARD. TO THE EXTENT ALLOWED BY LAW, LOA IS NOT RESPONSIBLE FOR ANY INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES ASSOCIATED WITH A WARRANTY CLAIM. For complete terms and conditions of LOA's Limited Warranty, please visit [www.lightsofamerica.com](http://www.lightsofamerica.com)

## INSTALLATION INSTRUCTIONS:

Mounting Bracket



Front View

1. Secure the mounting brackets to the mounting surface with the screws provided as the following:
  - 6" apart for models 7613S-XXX
  - 9" apart for models 7618S-XXX
  - 12" apart for models 7624S-XXX

Brackets should be in line with each other.

2. Install the LED lamp into the mounting bracket, (1) Latch one side of the LED lamp into the two brackets, then (2) latch the other side of the lamp until fully secured.

LED lamp may be detached by using a small flat screwdriver between hooks and prying outward on the lamp.

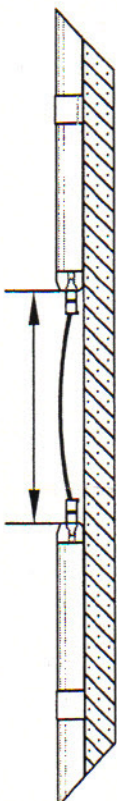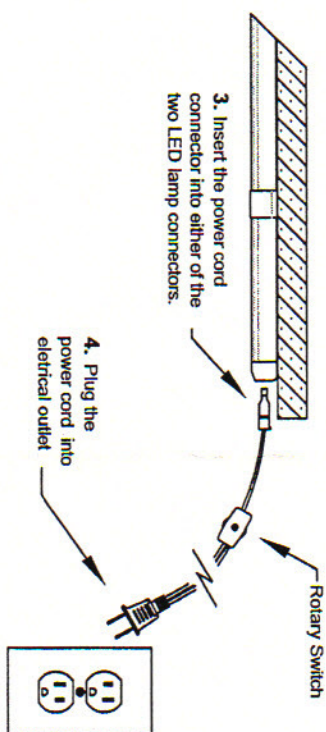

**Multiple Luminaire Installation:**  
LED Luminaire shall not exceed 35" apart. Attach all extension cords before plugging power cord to electrical outlet.  
**WARNING: THE TOTAL AMPS SHOULD NOT EXCEED 0.75A.**