



INSTALLATION INSTRUCTIONS

NO.2002

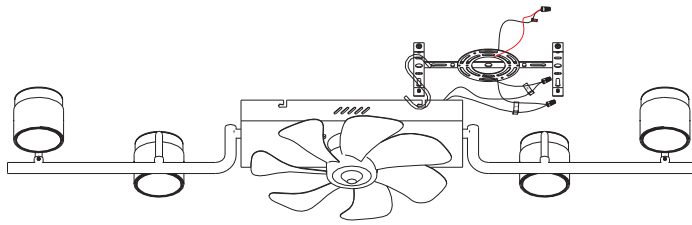


6. With power OFF, connect the controller to the mains L (live) and N (neutral) wires.

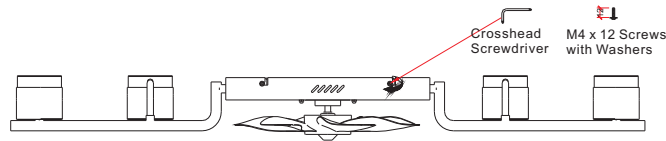

7. Align the side holes of the fixture's mounting bracket with those of the ceiling plate, push flush to the ceiling and tighten with M4×12 screws and washers using a Phillips screwdriver.


The horizontal direction can be rotated and adjusted by 360 degrees.

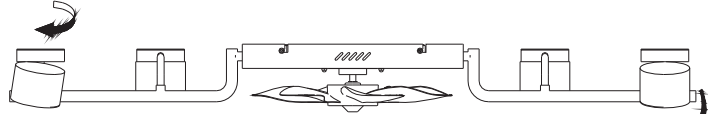

Caution: the power cord length is limited; do not twist forcibly.

The vertical direction can be adjusted by 90°.


8. The shade can be rotated to suit the lighting scene: 360° horizontally and 90° vertically.

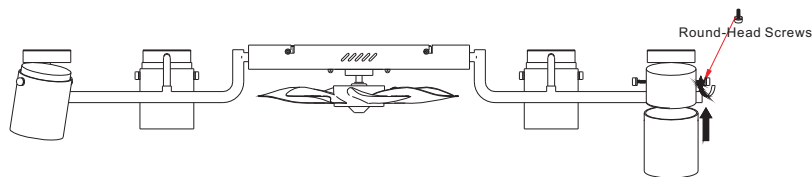

9. Carefully fit the glass into the shade as shown and secure with the round-head screws.

(Warning: handle glass with care to prevent breakage.)

Installation complete.

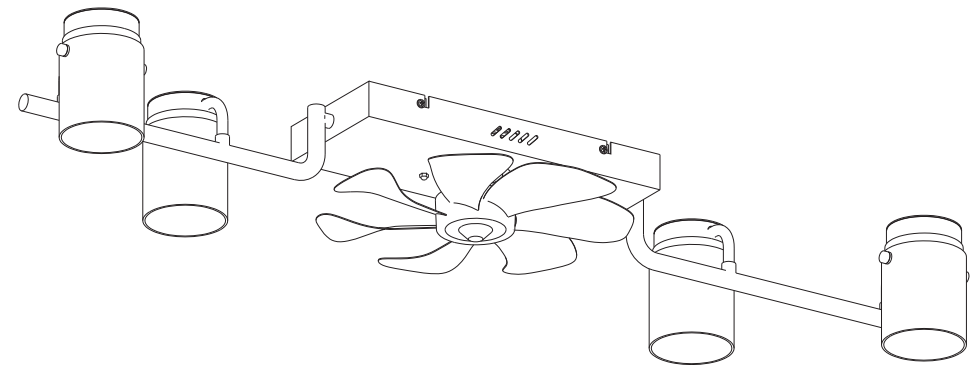

Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.




Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.




Warning!

1. Installation should be performed by a professional.
2. To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
3. This light fixture operates within a 110V to 265V range only.
4. Do not install the light fixture in damp conditions.
5. Keep the light fixture away from acidic and corrosive materials.


Package Includes

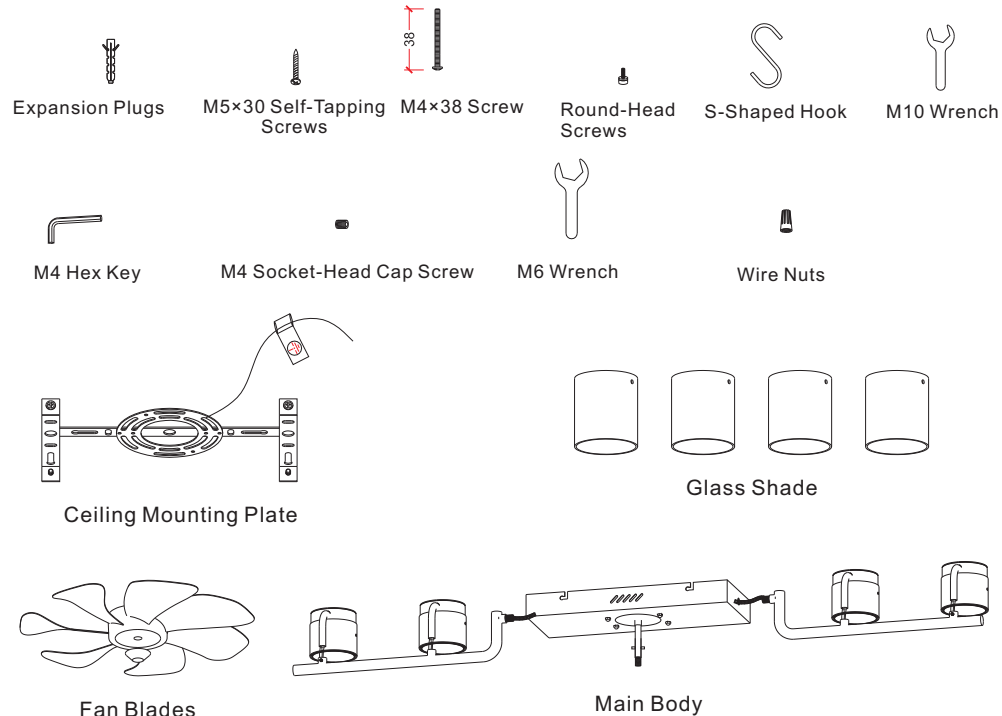


Installation Steps

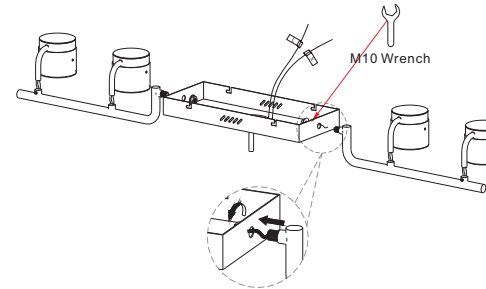


1. Lock both lamp arms perpendicular to the base at the angle shown in the figure, then loosen the lamp-head swivel pipe.

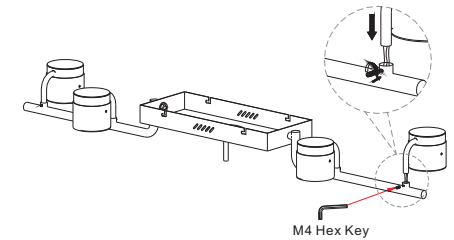


2. Adjust the lamp-head swivel pipe to the desired orientation as shown; insert it into the lamp arm and secure with an M4 hex key.

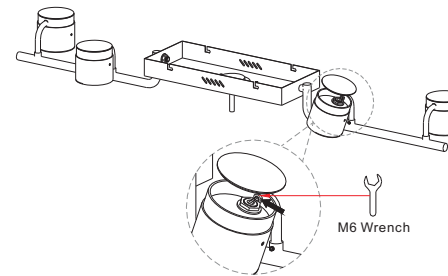

3. If the lamp head is not perpendicular to the floor, remove the cover, adjust to vertical, then tighten with an M6 wrench.

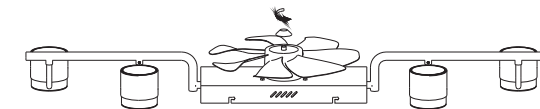

4. Turn the fixture over onto the workbench as shown, attach the fan blades and tighten the blade cap by rotating counter-clockwise.

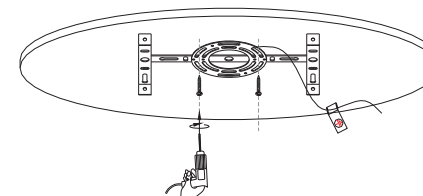

5. Fasten the mounting plate to the ceiling using the provided screws.