

## Features

- Patented K-joint installation ensures consistent trim appearance, regardless of variability in valve rough-in
- Trim requires valve to complete
- KOHLER finishes resist corrosion and tarnishing, exceeding industry durability standards over two times

### **Required Products/Accessories**

K-2972-KS 1/2" Thermostatic Mixing Valve or

K-2975-KS 3/4" Thermostatic Mixing Valve



**Devonshire**®

K-T10357-4

Thermostatic Valve Trim

ADA CSA B651 OBC

Codes/Standards ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1 CSA B651 OBC

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	PB	Vibrant® Polished Brass
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze



# KOHLER. Faucets

€ of Valve Inlet

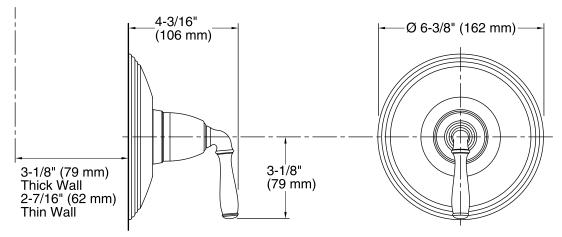

# **Technical Information**

All product dimensions are nominal.

### Notes

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

