CounterBalance®

CounterPlate / CounterPlate XL

3.75 X 9.75 | CCH-CBP 3.75 X 11.75 | CCH-CBPL




CCH-CBPL Installation Instructions

The CounterPlate is designed to attach to half walls or pony walls, supporting overhangson "breakfast bar" style countertops. The CounterPlate can support up to a 13" overhang. The CounterPlate XL can support up to 15" overhang.

|CounterPlate & CounterPlate XL Routered Install


- 1) Place plate where support is needed making sure to leave 1/2" of wood stud wall and trace shape into stud wall.
- 2) Using the router with 1/4" bit, router out traced shape.
- 3) Plate plate into routered area and mark holes for drilling, remove plate.
- 4) Drill pilot holes and place plate back into position and attach with the provided screws.

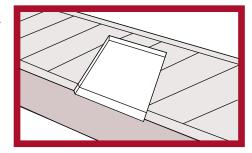

Check out our installation videos: youtube.com/user/ShopCB

- 5) Repeat steps as necessary for additional plates.
- 6) Apply a silicone sealant to the top of the brackets to secure them to the underside of the counter surface and set countertop into position. Rated up to 500 lbs.

Supports should be spaced no more than 16" to 20" apart for optimum performance

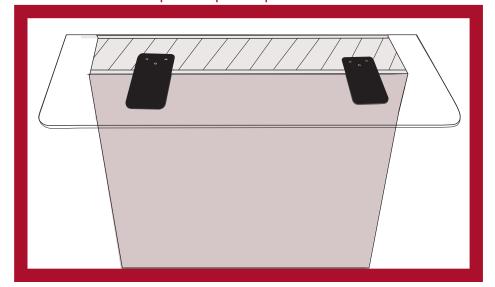

Counter Top Setting Instructions



NEVER set tops directly on plate or bracket at an angle when setting tops.

ALWAYS set tops from opposite side of stud wall or from front of cabinet.





The **CounterBalance CounterPlate & CounterPlate XL** were designed to provide cost efficient, quick, easy installs to support overhangs on stone and solid surface countertops. These products give your customers alternative to banging thier knees on pricey corbels and provide superior support and security. These low-profile brackets are hidden from view offering a clean, modern look.

Order online at counterbalanceshop.com or call 1.800.1966

These are general guidelines for installation methods, and may not apply to your application. Always consult a qualified contractor and follow their recommendations for proper installation.