

FRIGIDAIRE

GALLERY

1.2 Cu. Ft. Low-Profile Over-the-Range Microwave

Over-The-Range Microwave

Available Products: GMOS1266AF

Available Colors: Stainless Steel

Version: 01/23



Product Specifications

Cooking Controls

Clock	Yes
Cooking Power	950 Watts
Defrost Weight	Yes

Ventilation System

Ductless Vent	Yes
Ducted Vent	Yes
Exhaust Fan Speeds	3
Charcoal Filter Included	Yes
Grease Filter Included	Yes
Grease Filter Quantity	2
Grease Filter Dishwasher Safe	Yes
Removable Grease Filter	Yes

Additional Settings

Child Lock	Yes
Clock Display On / Off	Yes
Clock Settings	Yes
Demo On / Off	Yes
Setting Turntable On / Off	Yes
Setting Weight Lb / Kg	Yes

Internal Specifications

Interior Color	White
Interior Light Quantity	6
Interior Light Type	LED
Interior Light Wattage	1.2 Watts
Turntable Diameter	12 4/10"
Turntable Material	Glass

Dimensions and Volume

Height	10 5/16"
Width	29 7/8"
Depth	18 5/8"
Depth With Door 90° Open	47"
Microwave Interior Height	7 3/8"
Microwave Interior Width	21 7/8"
Microwave Interior Depth	12 3/16"
Microwave Capacity	1.2 Cu. Ft.

General Specifications

Warranty - Labor	1 Year
Warranty - Parts	1 Year

Microwave Cooking

Beverage	Yes
Melt / Soften	Yes
Popcorn	Yes
Sensor Cooking	Yes

Microwave Control Features

Quick Start	Yes - One Touch
-------------	-----------------

Display

Control Location	Bottom
Display Interface Color	White
Display Type	Capacitive Touch

Surface Light System

Lighting Type	LED
Number of Lights	6
Number of Light Settings	3


Electrical Specifications

Amps @ 120 Volts	13.5 Amps
Connected Load @ 120V	1.55 kW
Voltage Rating	120 V

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Installation Diagram

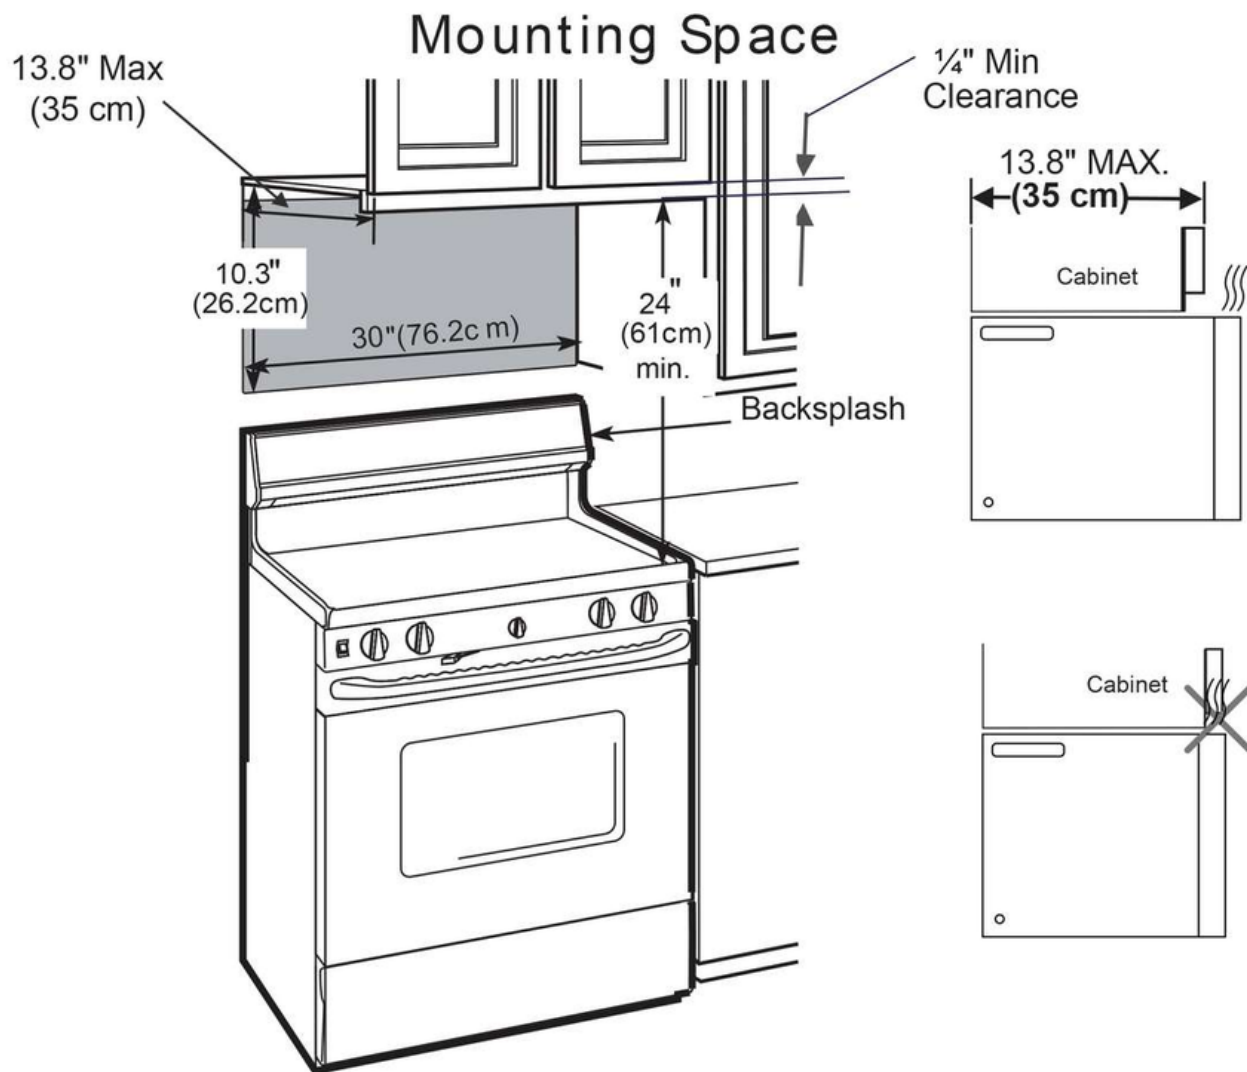

- The space between the cabinets must be 30" (76.2 cm) wide and free of obstructions.
- If you are going to vent your microwave oven to the outside, see Hood Exhaust Section for exhaust duct preparation
- When installing the microwave oven beneath smooth, flat cabinets, be careful to follow the instructions on the top cabinet template for power cord clearance.
- As a guide to installation, see page 26 for Mounting Template Information.
- If the cabinet depth, including the cabinet doors, is more than 13.8", then the unit must be spaced out from wall using adequate materials supporting 150 lbs to allow proper top vent air exhaust/intake.