

Fan Lamp Installation Guide



FAN : 230903A1

Safety Precautions

1. The fan must be mounted in a position to support a minimum of 66lb to ensure that the fan is adequately supported and to prevent the fan from loosening or falling out.
2. After installing the fan, it is necessary to ensure that each fastener is tightened to avoid any noise caused by loose components.
3. Some fasteners may loosen if the fan has been running for a long time. Check all fasteners at least twice a year to make sure they are tight enough. If necessary, they must be retightened before running.
4. The motor housing can be cleaned with a soft brush or lint-free cloth to avoid scratching the surface.
5. Tips: The appliance needs to be switched off from the mains before starting any maintenance.

Much appreciated for choosing our fan to be with you in your home, you will not regret it. This installation and operation manual contains complete instructions for installing and operating the fan. If you still need help, please feel free to contact us via Amazon Message

Remote Control(Emitter)Operation

If emitter can not control the fan:

1. If the ceiling fan is connected to your wall switch, please ensure the switch keeping on first.
2. Please check whether the batteries are installed correctly and whether they are charged. If necessary, replace the remote control batteries.
3. Please check if there are similar remote control products working nearby, because remote control products of the same frequency will interfere with each other.



Accessories diagram




round tube



hanging rod



horn

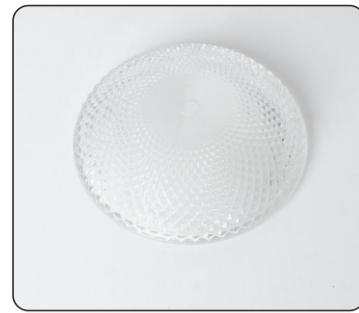

glass lampshade



tooth rod, black round ball, soft rubber spacer



long+short nylon tie




hanging board+latch



pin+spring pin



anchor screws

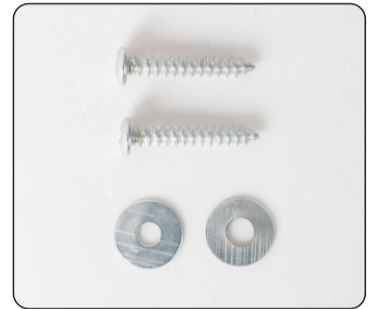

self-tapping screws+gasket

Installation Steps

Tips: There is a detailed step-by-step installation video on Amazon's page for this product, so it's easier to follow along with the video!



1. First loosen the locking wire buckle and remove the iron cover, then put the iron cover and the wire aside temporarily.



2. Align the round tube and insert it into the round iron column in the center of the chassis, and align the holes in the round tube and the round iron column and then put the pin through the holes between them, and finally pass the spring pin through the holes on the pin to fix it.



3. Put the iron cover through the round tube and install it to the chassis (Note: you need to align the 3 notches on the iron cover with the 3 square tubes on the lamp body) then hide the wires and driver into the round disk, and finally tighten it with the locking wire buckle.



4. Mount the horn on top of the iron cover.



5. Align the holes of the hanging rod and the round tube and then pass the pin through the holes between them, and finally pass the spring pin through the holes on the pin to fix it.



6. Use the short nylon tie to fix the wire on the round tube, the remaining two long ties can be fixed to other positions according to your needs.



7. After taking out the black round ball and soft rubber spacer on the tooth rod, then screw the rod to the nut at the bottom of the light source, and then put the glass lampshade and soft rubber spacer onto the tooth rod, and tighten the lampshade with the black round ball, finally use the "L" tool to tighten the small screws into the holes on the side of the black ball.



8. Installation on wooden ceilings: Put the self-tapping screws through the gasket and hanging board holes, then tighten the screws with a drill to hold the hanging board in place, and finally hang the fan light on the latch.



9. Installation on wall ceilings: First mark the position you want to install with the hanging board, then use the drill to make two 8mm deep holes in the marked position, pass the hanging board through the anchor screws and then use the nut to lock the hanging board to the ceiling, and finally hang the fan light on the latch.