

Features

- Includes mirror defogging
- Dimmable LED task lighting to 1%
- Compatible with most Triac/Phase-cut dimmers
- Energy efficient LED lighting:

| | |
|------------------------------------|----------|
| Kelvin | 2700 |
| CRI | 90+ |
| Lumens* | 746-1488 |
| Lux** | 366 |
| R9 Value* | 50+ |
| Foot-candles** | 34 |
| Watt Output - LED | 29 |
| Watt Output - LED with defogger on | 51 |

* Based on a measurement of subset of sizes, shapes and lighting styles
 † Measured at 18" from center of the mirror

Construction


- Anodized aluminum back frame
- Quality polished edge mirror
- Power cords installed for easy plugin installation
- Constructed for surface mounting
- Includes installation hardware

Codes/Standards Applicable

- Vitality Mirror is UL certified to:
- UL 962
 - CSA-C22.2, No. 12-82

Dimensions

Height: 30" (762 mm)
 Width: 24" (610 mm)
 Depth: 1-3/4" (45 mm)

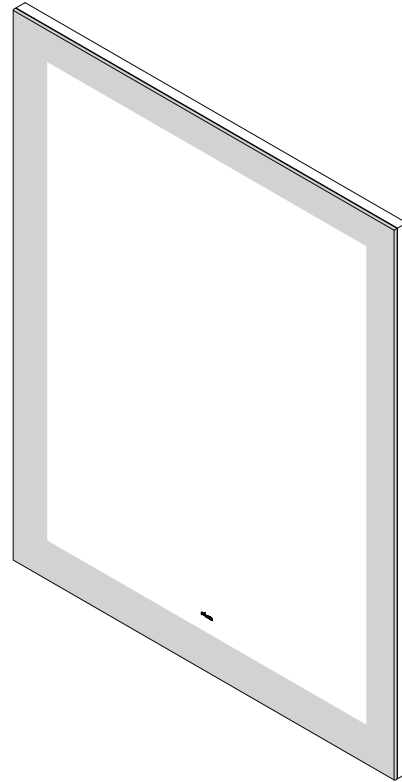


Model Number Key

| <u>Vitality</u> | <u>Mirror</u> | <u>Width</u> | <u>Height</u> | <u>Shape</u> | <u>Light Pattern</u> | <u>Edge Type</u> | <u>Options</u> | <u>Color Temp</u> |
|-----------------|---------------|--------------|---------------|---------------|----------------------|---------------------|----------------|-------------------|
| Y | M | 24 | 30 | R = Rectangle | P = Perimeter | FP = Flat, Polished | D = Defogger | 3 = 2700K |

Electrical System

- 120 Vac 60Hz (TBD) recessed wall outlet as shown in drawing

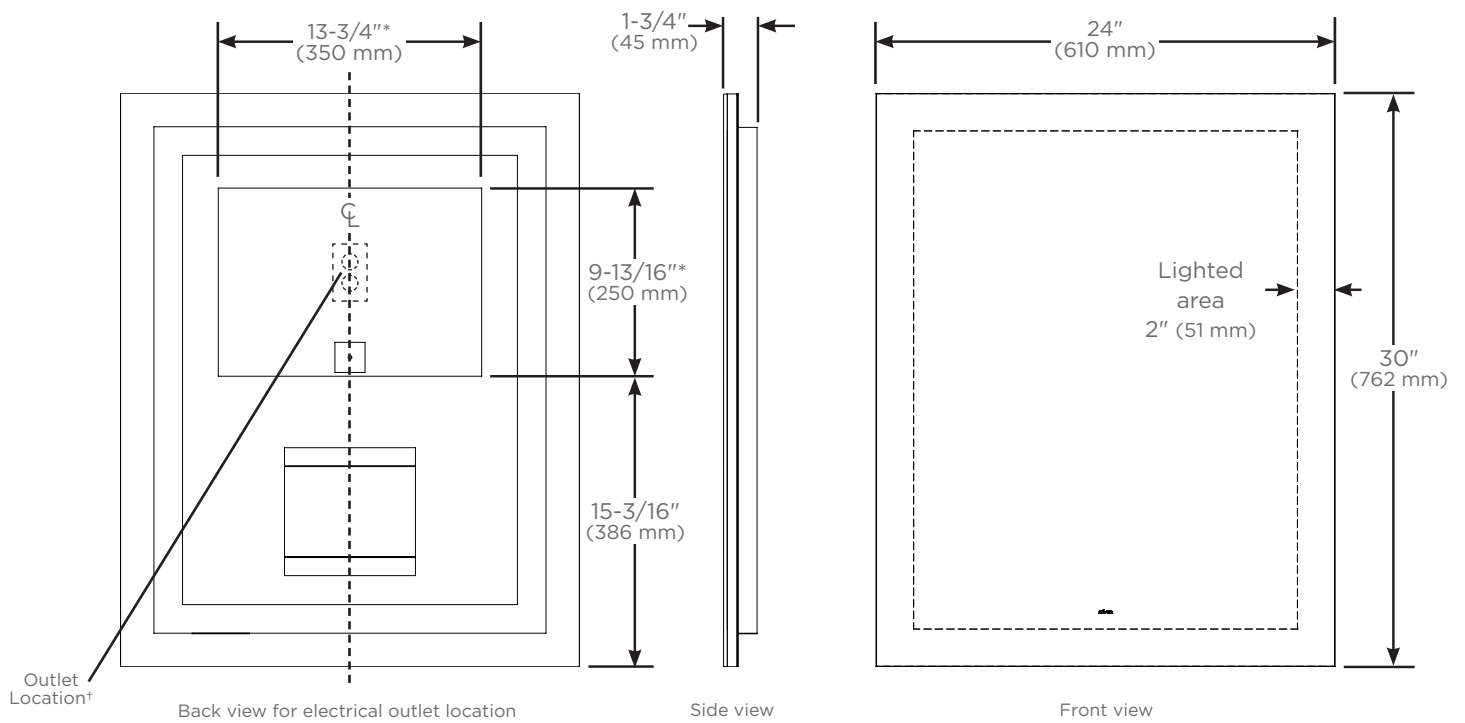

* Defogger Size

† See instructions for wiring and location