Aquia® Close Coupled Toilet, 1.6GPF & 0.9GPF

FEATURES

- Dual-Max® flushing system, low consumption (1.6GPF/6.0LPF & 0.9GPF/3.4LPF)
- Elongated bowl
- Universal Height
- Close coupled, elongated front bowl and tank set, less toilet seat
- Chrome push-button
- 12" Rough-in

MODELS

CST412MF

COMPONENTS

- CT412F Elongated Front Bowl
- ST412M Tank and Cover only
- SS204 SoftClose® seat (sold separately)
- SS114 SoftClose® seat (sold separately)

COLORS/FINISHES

Standard
 #01 Cotton
 #03 Bone
 #11 Colonial White
 #12 Sedona Beige
 #51 Ebony

PRODUCT SPECIFICATION

The two-piece, universal height, low consumption Dual-Max flushing system toilet shall be 1.6GPF/0.9GPF. Toilet shall have high-profile tank, elongated front bowl and chrome push-button. Toilet shall be TOTO Model CST412MF____.



QUAMAX®

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSensesm, State of Massachusetts, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others



Aquia® Close Coupled Toilet, 1.6GPF & 0.9 GPF

SPECIFICATIONS

• Water Use 1.6 GPF & 0.9GPF (6.0 LPF & 3.4LPF)

Flush System Dual-Max
Min. Water Pressure 8 psi (flowing)
Water Surface 6" x 4-1/2"
Trap Diameter 2-1/8"
Rough-in 12"
Trap Seal 2-1/8"

Warranty
 One Year Limited Warranty

 Material Vitreous china
 Shipping Weight CT412F - 80lbs ST412M - 30lbs

Shipping Dimensions CT412F

30-3/4" L x 17-3/8" W

x 20-1/2" H


ST412M 17-1/4" L x 7-7/8" W


x 17-1/2" H


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

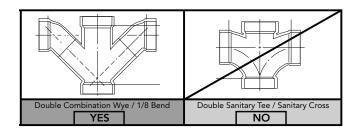

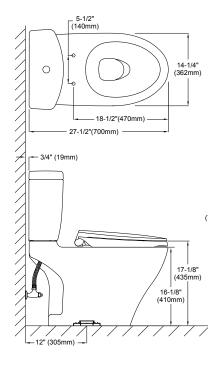



TOTO®

These dimensions and specifications are subject to change without notice