

Instructions:

1. Lock the garage door in the closed position. Assemble and adjust the new bracket to match the height of the top section on the garage door.
2. Unplug the opener and remove the old bracket from the door. Remove the fasteners from the top half of the hinge on the top section of the garage door. (Figure 1)
3. Place the bracket on the top section (Figure 2). If the door has a strut across the top section, slide the top end of the bracket under the strut (Figure 3). Align the mounting slots in the bottom of the bracket with the slots in the hinge. Fasten the lower portion of the bracket over the hinge. Secure the top portion of the bracket under the strut.
4. Attach the bottom of the opener J arm to the bracket by sliding the pin through one of the holes in the bracket. Secure the pin with the pin keeper. (Figure 4)

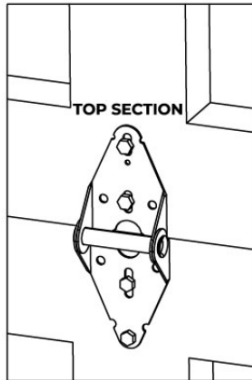


Figure 1

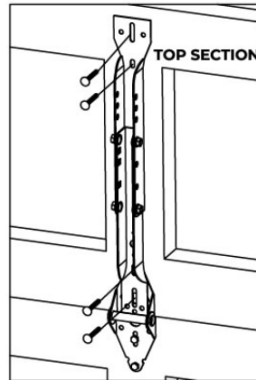


Figure 2

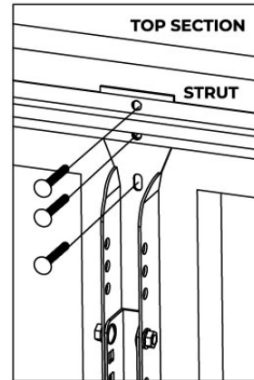


Figure 3

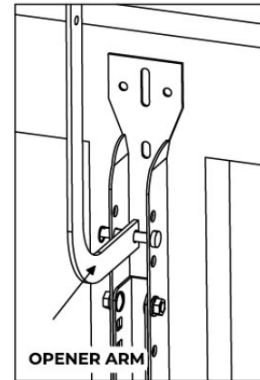


Figure 4