
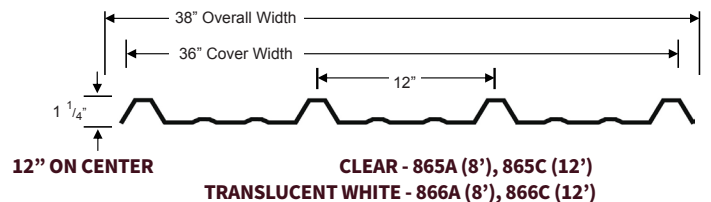


TUFTEX® Poly-Lite™

Polycarbonate skylight panels that match popular metal profiles.

PROFILES

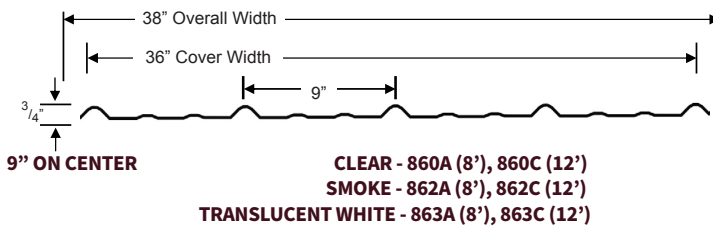

TECHNICAL CHARACTERISTICS

Lengths*	8-ft & 12-ft available in all colors. 10-ft, 14-ft, & 16-ft lengths available for selected colors. Call for lead time.
Width	38-in (36" coverage)
Corrugation height	9/16-in
Cutting	Snips, heavy duty scissors (single panel) or circular saw with plywood blade reversed (multiple panels)
Minimum slope required	1:12; Increase in heavy snow areas
Cross brace support structure	24-in on center max Paint outward-facing side white
Side and end laps	Side laps = 1 corrugation End laps = 4-in
Fasteners per panel	Pre-drill all fastener holes in panel Fasten every 6"
Surface heat range	-40° F to 270° F

*Availability based on our current stock.

BENEFITS

IMPACT RESISTANT

NATURAL LIGHTING

POPULAR METAL PROFILES

UV PROTECTION



**TIP: PREDRILL
1/8" - 3/16"
LARGER THAN
DIAMETER OF
FASTENER
(9/32" for TUFTEX
2" Fasteners)**