



# ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0240

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.



NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):



## IMPORTANT:

*The sensor has an excellent photocell function to enable the light to turn on at dusk and off at dawn automatically.*

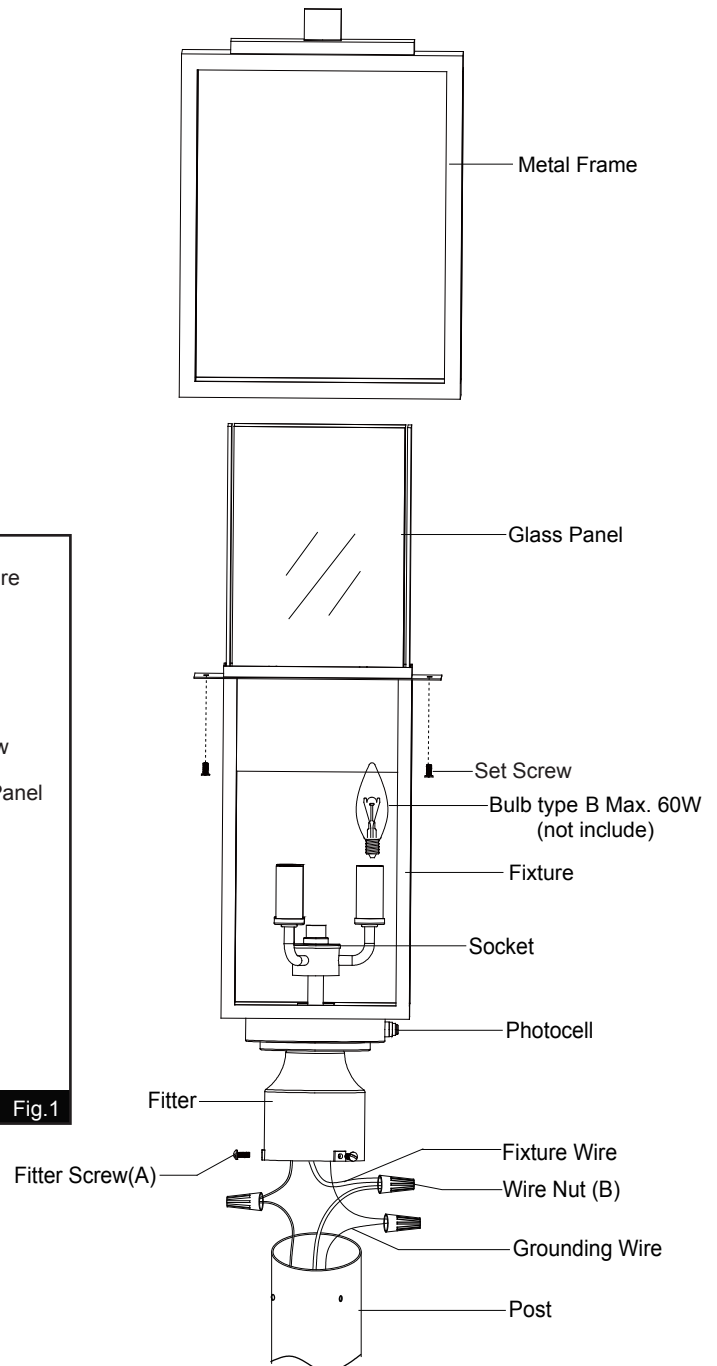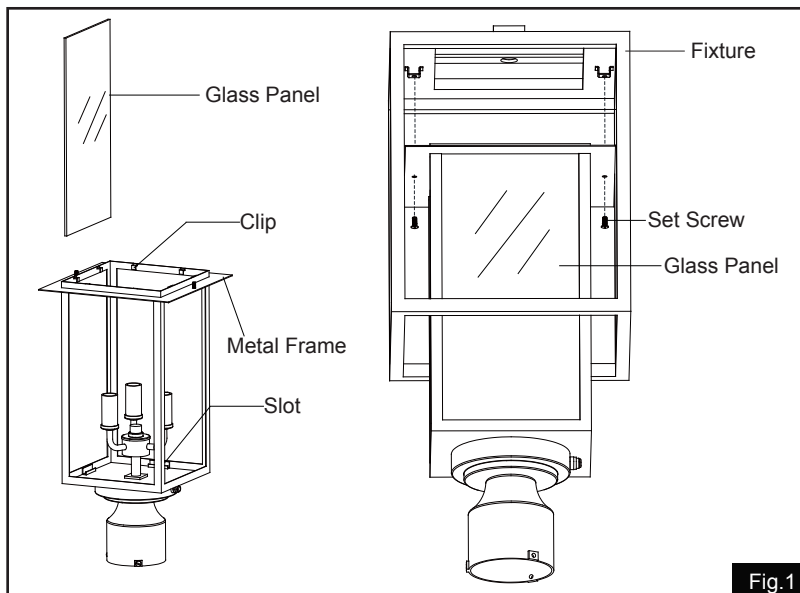

## Installation Steps


Turn off the power at fuse or circuit box.

1. Remove two set screws to separate the metal frame from the fixture.
2. Install three bulbs (not included). Check relamping label at socket area or packaging for maximum allowed wattage.
3. Take a glass panel, insert it into the slot at one side of the metal frame carefully, secure it by pressing clips. Repeat with the other glass panels.(See Fig.1)
4. Attach the metal frame back to fixture, and then secure it with two set screws.(See Fig.1)
5. Pull out the source wires from the post. Make wire connections using wire nuts as follows:
  - Connect the hot wire (usually black insulation) from the fixture to the black wire from the post
  - Connect the neutral wire (usually white insulation) from the fixture to the white wire from the post
  - Attach the fixture grounding wire (usually green insulation or bare wire) to the grounding wire from the post.Carefully put the wires back into the post.
6. Place the fitter on the post, and then secure it with the fitter screws.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

### Spare Parts List:

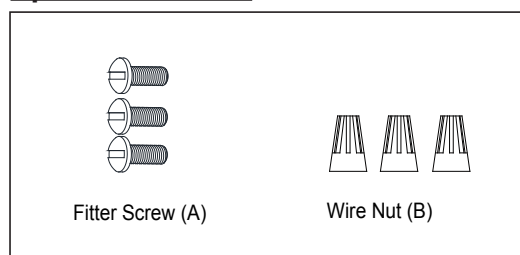


Fitter Screw (A)

Wire Nut (B)

Assembly Kit  
5537MM (1 SET)



Glass Panel  
9806RG (4PCS)

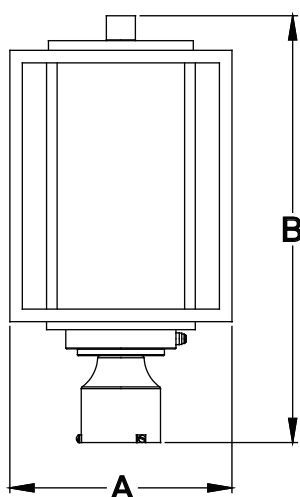

A: 9"

B: 17-1/4"