


SYMBOL	KNOCKOUTS	
	CONDUIT SIZE	
	IN	MM
A	.50	13
B	.75	19
C	1.00	25
D	1.25	32
E	1.50	38
F	2.00	51
G	2.50	64

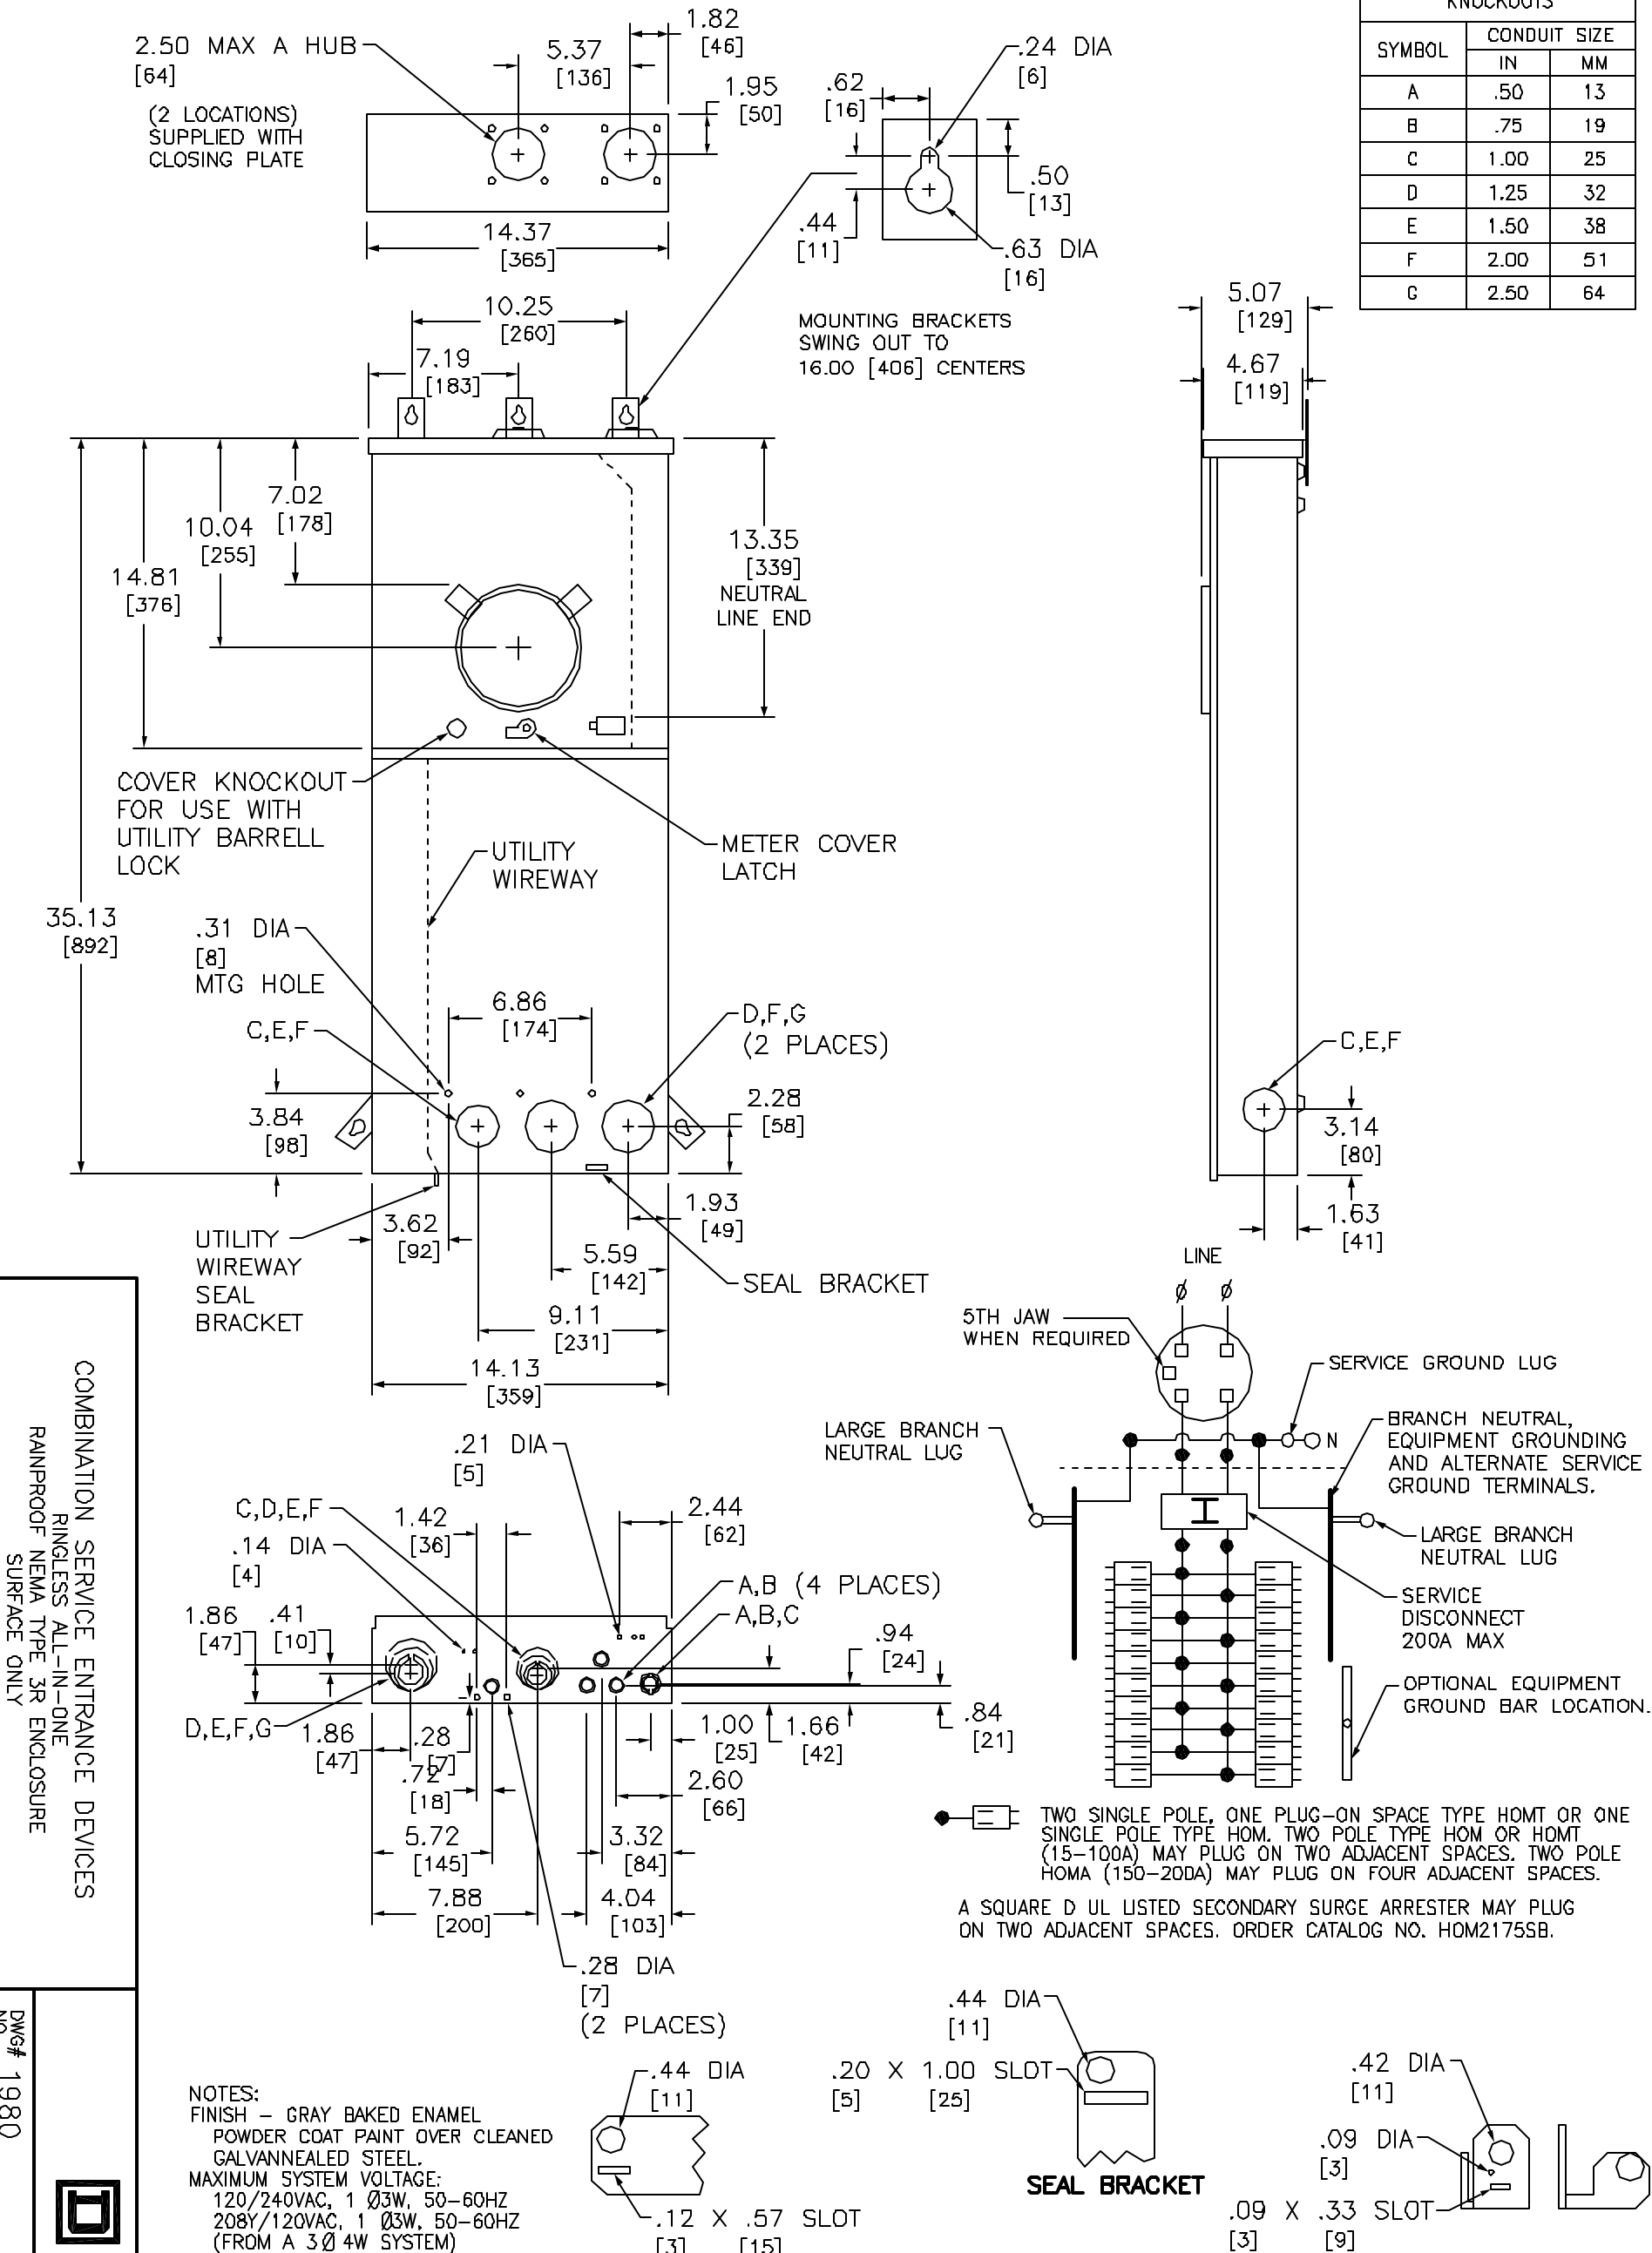

NOTES:
FINISH - GRAY BAKED ENAMEL
POWDER COAT PAINT OVER CLEANED
GALVANNEALED STEEL.
MAXIMUM SYSTEM VOLTAGE:
120/240VAC, 1 Ø3W, 50-60HZ
208Y/120VAC, 1 Ø3W, 50-60HZ
(FROM A 3 Ø 4W SYSTEM)
UL LISTED - FILE E-6294 VOL M
SUITABLE ONLY FOR USE AS
SERVICE EQUIPMENT.
SUITABLE FOR UNDERGROUND/
OVERHEAD SERVICE.

UTILITY WIREWAY
SEAL BRACKET

METER COVER LATCH

DUAL DIMENSIONS: INCHES
MILLIMETERS

MAINS AMPERE RATING	FACTORY INSTALLED BYPASS TYPE	SHORT CIRCUIT CURRENT RATING	CATALOG NUMBER	SERIES	SPACES	MAXIMUM NUMBER OF SINGLE POLE HOM CIRCUITS	LINE SIDE PHASE & NEUTRAL LUGS AWG/KCMIL	SERVICE GROUND LUG AWG/KCMIL
125	HORN	22K	RC2040M125CH	MQ1	20	40	#6-350 CU/AL	#14-2/0 CU #12/2/0 AL
150	HORN		RC2040M150CH					
200	HORN		RC2040M200CH					
	NONE		RC2040M200C					

COMBINATION SERVICE ENTRANCE DEVICES
RINGLESS ALL-IN-ONE
RAINPROOF NEMA TYPE 3R ENCLOSURE
SURFACE ONLY



DWG# 1980
NO.