


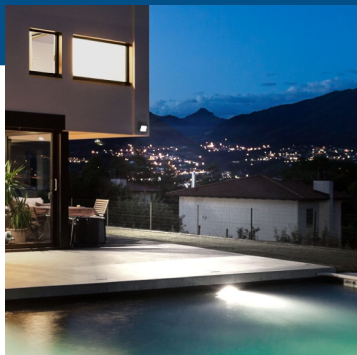

HyperFLBX-50 - 391XX1056

FLOOD LIGHT WITH BRACKET LED OUTDOOR

HYPERIKON®

SPECIFICATIONS


Model Name	SKU	Wattage	Lumens	Efficacy	Kelvin
HyperFLB30-50	391031056	30W	2,400 Lm	80 Lm/W	5000K
HyperFLB50-50	391051056	50W	4,000 Lm	80 Lm/W	5000K
HyperFLB100-50	391101056	100W	8,000 Lm	80 Lm/W	5000K
HyperFLB200-50	391201056	200W	16,000 Lm	80 Lm/W	5000K
HyperFLB300-50	391301056	300W	24,000 Lm	80 Lm/W	5000K

MODEL DESIGN


391031056



391051056



391101056



391201056



391301056



The Hyperikon® LED Flood Lights with Bracket are the perfect outdoor lights, with a super high lumen count of up to 24,000 lumens! Thanks to its IP65 rating, these lights are made to endure even the harshest weather conditions.



Voltage
110V



Wired
Fixture



Beam Angle
120°



IP Rate
65



Dimmable



Temperature
-4 °F to 113 °F

- Suitable for wet locations.
- 45,000+ hours of lifespan, more than 41.1 years based on 3Hrs/day average.
- Sealed Die-casting Profile for Outdoor Applications.
- Polycarbonate Optical Lens with UV Stabilizers.

WARNINGS AND CAUTIONS

- Risk of electric shock - turn power off before inspection, installation or removal.
- Avoid direct eye exposure to the light source.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.

HYPERIKON®

☎ (888) 846-4973

✉ info@hyperikon.com

📍 707 Broadway Suite 800

San Diego, CA 92101

🌐 www.hyperikon.com

