



# Prim™

## Frameless sliding bath door

### K-706535-8D3

#### Features

- Shower door is 63-9/16" high, with 57-1/2" of walk-through height.
- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Double header conceals wheels and door tracking system while allowing glass panels to rise above the header, giving the door a lofted and airy look.
- Stays Closed feature inside the header keeps door firmly closed, providing excellent water containment.
- Smooth, easy-to-clean wall jambs.
- 16-1/4" vertical handles.
- CleanCoat® nanotechnology provides a smooth, nonstick surface to help prevent buildup of water stains, bacteria and mildew on your glass, to make it easy to clean and keep it looking like new.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.

#### Material

- Frameless, 5/16" (8 mm) thick Frosted tempered glass door.
- Anodized aluminum hardware prevents rusting or corrosion.

#### Installation

- Fits opening widths 54-5/8" – 59-5/8" (1387 – 1514 mm).
- 3/8" (10 mm) out-of-plumb adjustability per side allows for simpler installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- Not for use in hospitality.
- For residential use only.

#### Recommended Products/Accessories

K-23723 Faucet cleaner

#### Included Components

Additional Components:  
Hardware kit



#### Codes/Standards

ANSI Z97.1  
CPSC 16CFR 1201

#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*


Color	Code	Description
-------	------	-------------



SHP	Bright Polished Silver
ABZ	Anodized Dark Bronze
BNK	Anodized Brushed Nickel

#### Available Glass Options

Code	Description
D3	Frosted

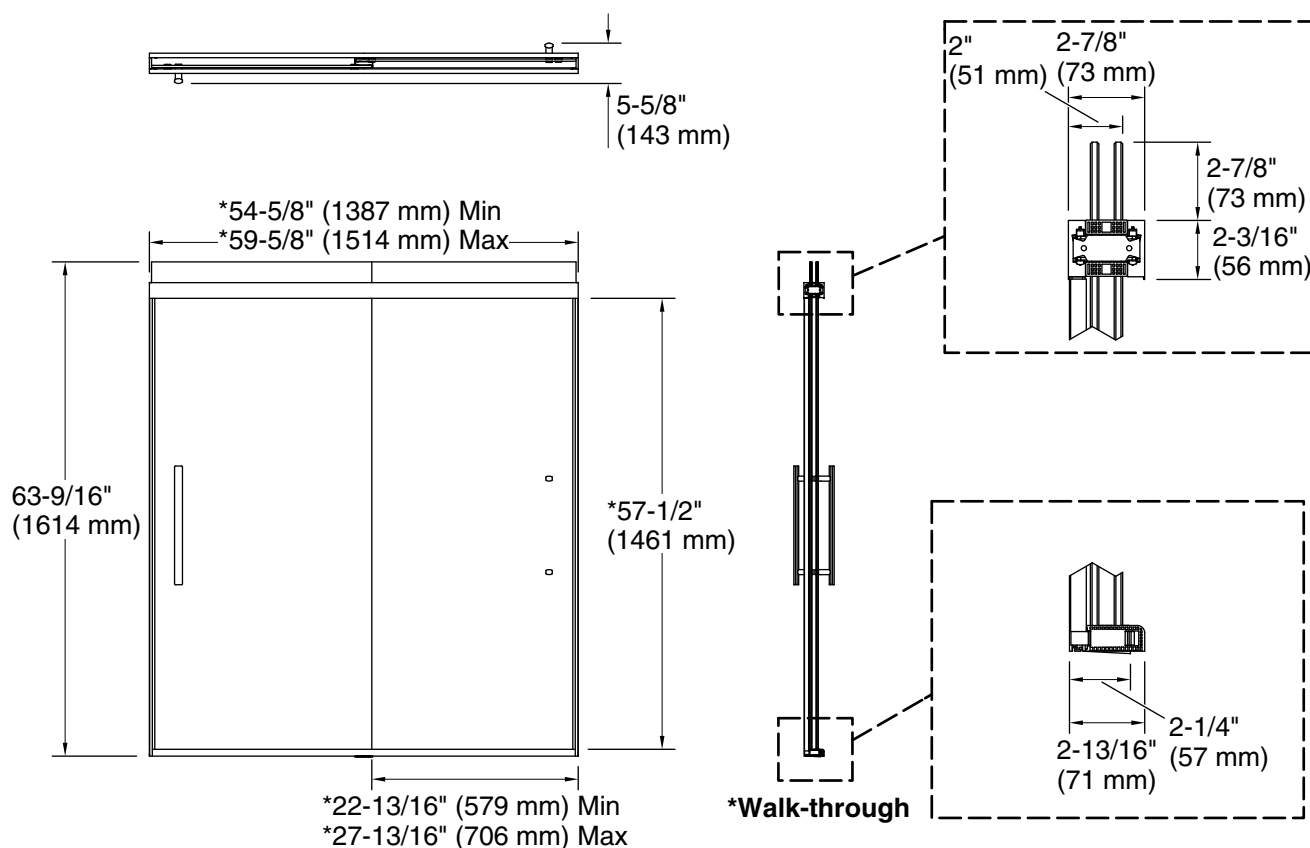

## Technical Information

All product dimensions are nominal.

Installation type: For bath installation

Opening Width - Min: 54-5/8" (1387 mm)

Opening Width - Max: 59-5/8" (1514 mm)

Walk-through - Min: 22-13/16" (579 mm)

Walk-through - Max: 27-13/16" (706 mm)

Base-To-Wall Radius 1/4" (6 mm)

– Max:

Glass thickness: 5/16" (8 mm)

Glass coating: CleanCoat®

## Notes

Install this product according to the installation instructions.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

This product can only be installed with a corner radius between the shower wall and the shower/bath ledge of 1/4" (6 mm) or less.

The vertical opening should be a minimum of 65-1/2" (1664 mm) to allow for installation clearance.