

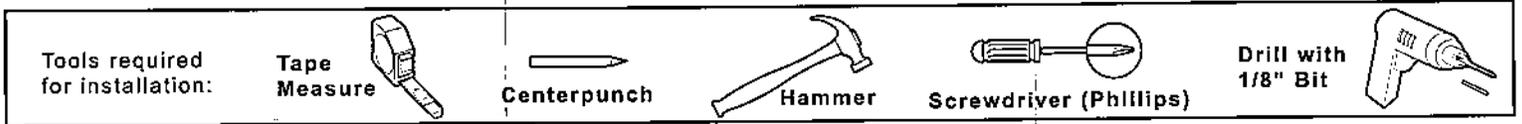


# DOOR CLOSER INSTALLATION INSTRUCTIONS

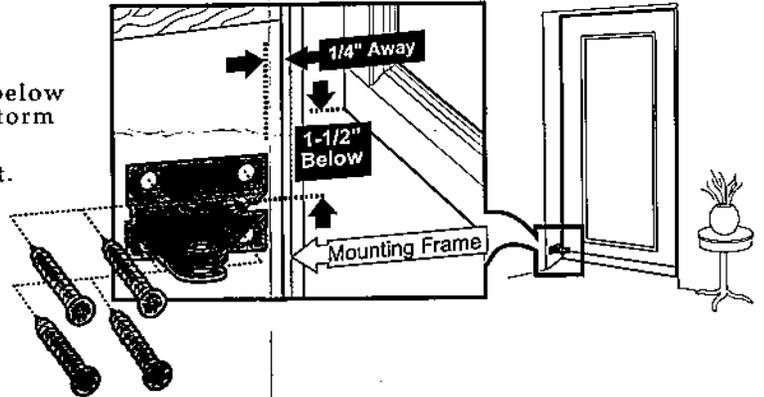


If replacing an existing closer, reuse the holes from your previous closer.


1. Position the jamb bracket, on hinge jamb, about 1-1/2" below the storm door window opening and 1/4" away from the storm door mounting frame.
2. Mark the four hole locations and predrill with a 1/8" bit.
3. Secure using four screws.




4. Slide the hold open washer onto the closer rod, then attach the rod to the jamb bracket using the short pin.




5. Attach the door bracket to the other end using the long pin.

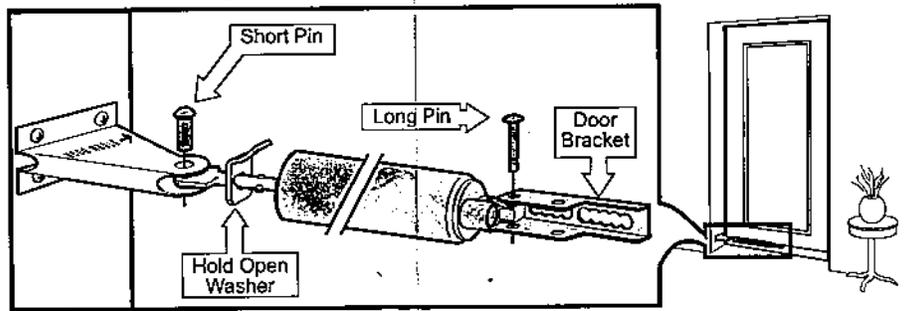

6. Pull the closer tube to extend the closer rod.
7. Slide the hold open washer past the lugs to achieve a distance of 1/16" between the hold open washer and the lugs.

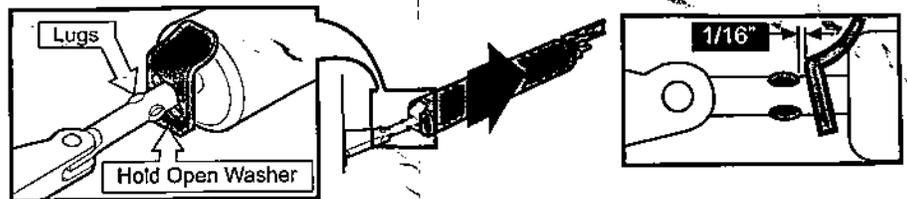

8. With the door tightly closed, swing the door bracket onto the door while holding the closer assembly level.
  9. Mark the centers of the two hole patterns and predrill using a 1/8" bit to drill the hole 3/8" deep.
- Hint: To avoid drilling through the door, mark the 3/8" hole depth on the drill bit using a piece of tape.

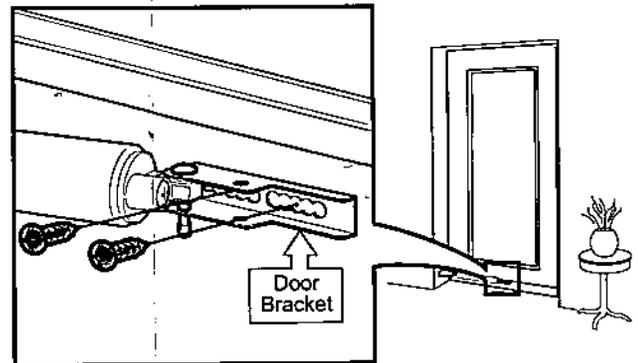

10. Secure using two screws.




11. Verify the door operates properly. If necessary, reposition the door bracket to ensure proper operation.

Note: Slide the hold open washer back past the lugs for normal operation.

12. Adjust the closing speed of the door with the adjustment screw.
- For interchangeable glass and screen models, pin the closer using the appropriate hole position.
- For Self-storing models use the glass position.

NOTE: If initially, the closer does not work properly, remove the adjustment screw, operate the door a few times, then...

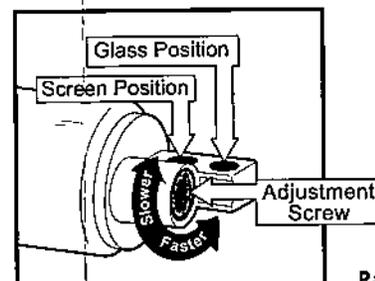

2109 4TH AVENUE SOUTH  
CLEAR LAKE, IA 50428 USA

Part Number 34417