


# LP8377LBL

(Lowes Item #883778)

LP8377\*\*

## 56" Ceiling Fan

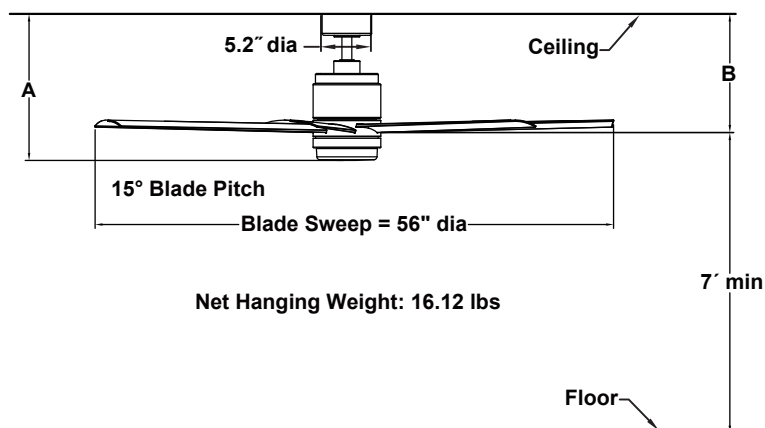

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

100 x 30 DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

### BLADES:

A set of seven 26" composite blades is included.

### CONTROL OPTIONS:

TR205DS hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control is available— sold separately. Instructions is provided with each control.

### LIGHTING OPTIONS:

One 18-watt LED included.

### DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan must use 12" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry and damp locations.

|                    | A      | B      |
|--------------------|--------|--------|
| Fan w/4.5" downrod | 15.44" | 12.52" |
| Fan w/12" downrod  | 22.94" | 20.02" |
| Fan w/18" downrod  | 28.94" | 26.02" |
| Fan w/24" downrod  | 34.94" | 32.02" |
| Fan w/36" downrod  | 46.94" | 44.02" |
| Fan w/48" downrod  | 58.94" | 56.02" |
| Fan w/60" downrod  | 70.94" | 68.02" |
| Fan w/72" downrod  | 82.94" | 80.02" |

### Available Finishes

|     |                                                                         |
|-----|-------------------------------------------------------------------------|
| LBL | Black with Black Blade and Opal Frosted Glass/Steel Cap                 |
| LBN | Brushed Nickel with Gray Blade and Opal Frosted Glass/Steel Cap         |
| LGR | Matte Greige with Weathered Wood Blade and Opal Frosted Glass/Steel Cap |
| LMW | Matte White with Matte White Blade and Opal Frosted Glass/Steel Cap     |

### Airflow / Energy Efficiency Info (120V)

| Fan Speed                | Max RPM | CFM  | CFM / Watts | Amps | Watts |
|--------------------------|---------|------|-------------|------|-------|
| High (16 <sup>th</sup> ) | 135     | 6764 | 177         | 0.59 | 38    |
| Med (9 <sup>th</sup> )   | 87      | 4384 | 487         | 0.15 | 9     |
| Low (1 <sup>th</sup> )   | 29      | 1257 | 625         | 0.04 | 2     |

### Energy Guide FTC

| Power (Wave) | Total Air Delivery (CFMave) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|--------------|-----------------------------|-----------------------------------|--------------------------------|
| 23           | 4808                        | 7                                 | 206                            |

### Light Bulb Information (120V)

| Bulb Type | Watts | QTY | Lumens Amount | Color Temp | CRI |
|-----------|-------|-----|---------------|------------|-----|
| LED       | 18    | 1   | 1500          | 3000       | 90% |