

Rite-Temp® bath and shower trim kit, 2.5 gpm K-TS27403-4

Features

- A single handle controls both on/off activation and temperature setting
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Antiscald protection
- Includes faceplate with ADA-compliant metal lever handle
- Includes 6-1/16" (154 mm) diverter bath spout with slip-fit connection
- Includes single-function 2.5 gpm (9.5 lpm) showerhead
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Includes shower arm and flange
- Coordinates with other products in the Riff collection
- Requires Rite-Temp® pressure-balancing valve (sold separately)

Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER® finishes resist corrosion and tarnishing

Required Products/Accessories

K-8304 Series Rite-Temp $\ensuremath{\mathbb{R}}$ Valve & Cartridge Kits or

K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

Adapters, Rough-in and Extension Kits

10350

Range: 3-1/2" (89 mm) -4-1/4" (108 mm)

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

K-10350 Deep rough-in kit K-10351 Test cap for K-8300 Series valve bodies 1307346 Retro mixer cap for K-304 Rite-Temp valve 1362395 Retro mixer cap for K-2971 HiFlow Rite-Temp valve





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 IAPMO Certification


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

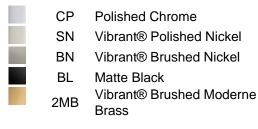



KOHLER, Faucets

Rite-Temp® bath and shower trim kit, 2.5 gpm K-TS27403-4

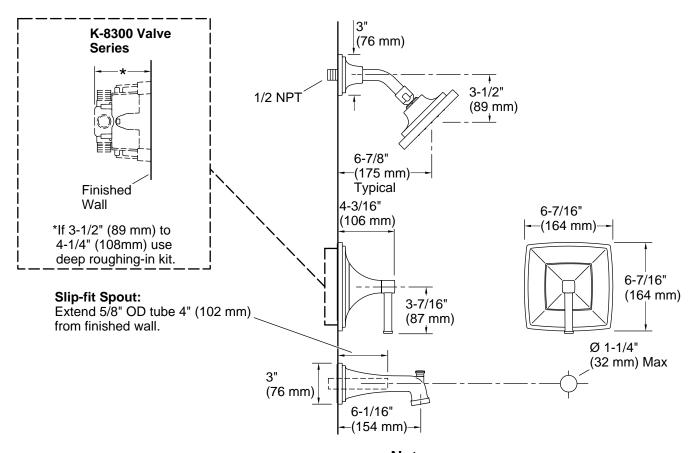

Technical Information

All product dimensions are nominal.

Drain included: No

Spout:

Spout reach: 6-1/16" (154 mm)

Handshower:

Rated maximum 0 gal/min (0 l/min) flow:

Showerhead/Body Spray:

Rated maximum flow:

2.5 gal/min (9.5 l/min)

Notes Install this product according to the installation instructions.

