

Single-handle semi-professional kitchen sink faucet K-R26735-SD

Features

- Semi-professional kitchen faucet with finish-matched easyclean hose cover.
- Two-function sprayhead with touch-control allows you to switch from stream to Sweep® spray.
- Sweep® spray features specially angled nozzles that form a wide, powerful blade of water to sweep your dishes and sink clean.
- Magnetic docking arm keeps the sprayhead securely in place.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- High-arch spout offers vertical clearance for tall cookware and pitchers.
- Single lever handle makes adjusting water temperature easy with one hand.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).
- Box includes: Assembled faucet, supply lines, soap/lotion dispenser, and escutcheon plate.

Material


- Premium material construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.
- Select KOHLER finishes feature ScratchShield[®] technology which withstands even the toughest daily use.

Installation

- Installs with 1-, 2-, 3-, or 4- hole sink (escutcheon plate included).
- Flexible supply lines and quick-connect fittings simplify installation.
- Longer shank works with countertops up to 2-1/2" (63.5 mm) thick and is easy to install.

Recommended Products/Accessories

K-23723 Faucet cleaner



Kni®

ADA CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651


KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Koi®

KOHLER, Faucets

Single-handle semi-professional kitchen sink faucet K-R26735-SD

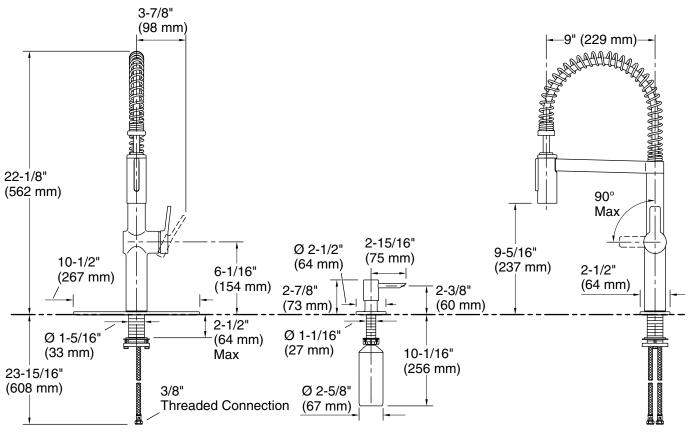

Technical Information

All product dimensions are nominal.

Drain included: No

Spout:

Spout reach: 9" (229 mm)

Notes

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

