

Kitchen Faucet Installation Manual

W-80(ES)

Warranty Duration

All components of this faucet system are covered under a lifetime limited warranty, ensuring they are free from defects in material and workmanship for the original purchaser.

Repair and Replacement

If the product shows defects in material or workmanship under normal use and within the warranty period, we will, at our discretion, either repair the product or provide a replacement at no cost to the original purchaser. Please note that proof of purchase (e.g., an invoice) is required when requesting service. The warranty does not cover damages caused by improper installation, misuse, or modifications.

Exclusions

We shall not be responsible for the following cases:

- Damage to the product caused by improper installation, misuse, unauthorized repair or replacement, or abuse (including damage during shipment).
- Damage to the product caused by improper dismantling after installation.
- Damage resulting from abnormal water pressure or impurities in water pipes, which is not covered under this warranty.
- Rust on the product due to insufficient care and maintenance, which is not covered under this warranty.
- Damage caused by natural disasters such as fire, flood, earthquake, lightning storms, etc., which is not covered under this warranty.

I hope this helps! If you have any further questions or concerns, please let me know.

Having Trouble? Contact us.

✉ Email: info@faucetsupport.com

☎ Toll Free: 1-888-969-6880



M3081
SFS-1133

CONTENT




1.Kitchen Faucet Installation Manual ----- (1-3)

CONTENIDO


1.Manual de Instalación del Grifo de Cocina ----- (4-6)

Prior to Installation

1. Ensure that all necessary parts are available by referring to the diagram and parts list.
2. Ensure that your basin matches the kitchen faucet size.
3. Do not disassemble the main faucet body, as it has been properly installed and tested before delivery from the factory.
4. Turn off the hot and cold water supply before starting the installation.
5. To prevent the faucet from clogging, flush the water pipes before installation.
6. After completing the installation, check all joints and connections for leaks.




Standard Part List

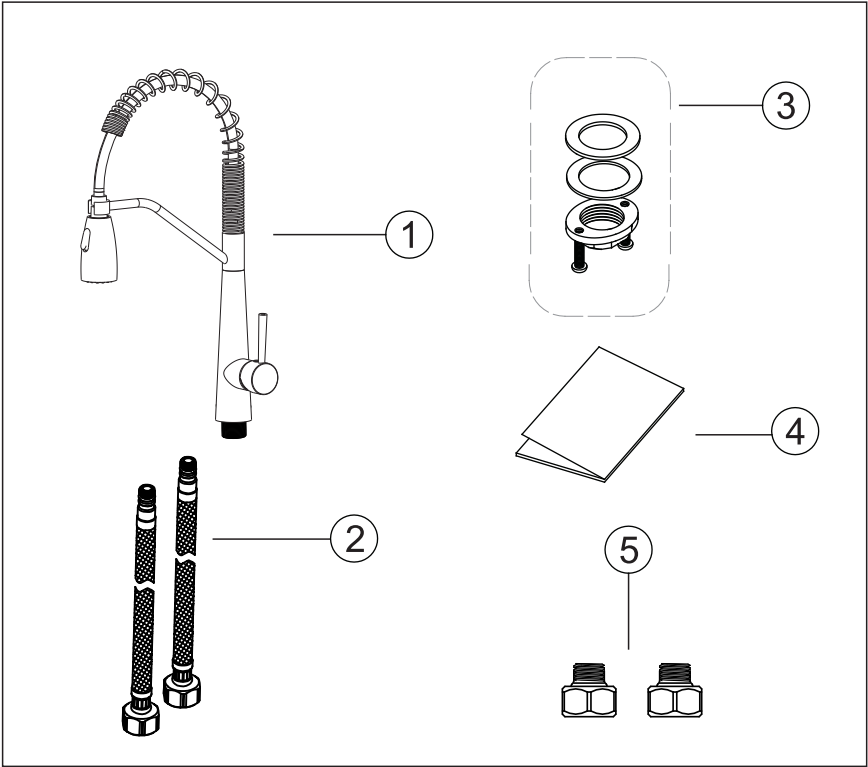


NO.	Part Name	Qty
1	Faucet body	1
2	Cold and hot water inlet pipes	1 set
3	Tailpiece nut assembly	1 set
4	Instruction manual	1
5	G9/16 to NPT1/2 adapter	2


Installation Step

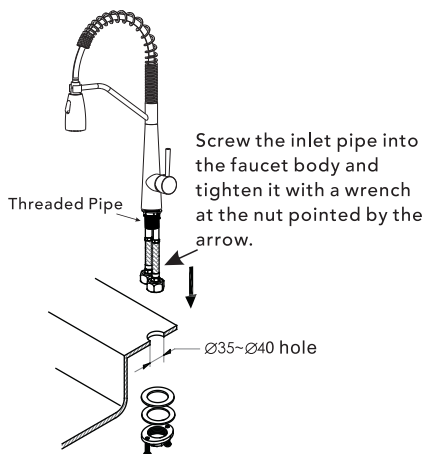


- 1. Remove tailpiece nut assembly from the Threaded Pipe. The countertop cutout dimensions are as shown in the diagram.**

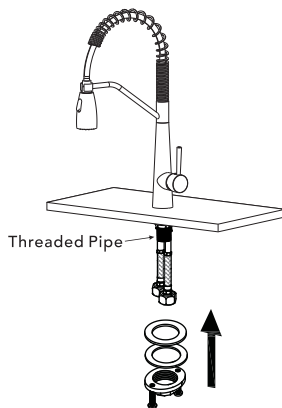

- 2. Insert faucet body into the hole on the counter top. Secure the tailpiece nut assembly onto the threaded pipe connection under the sink in order, and tighten using a screwdriver.**

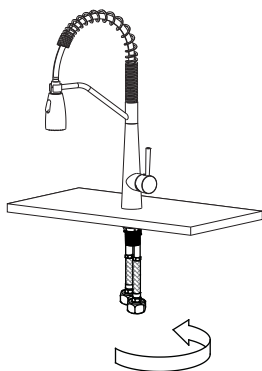




- 3. Adjust direction of faucet body.**

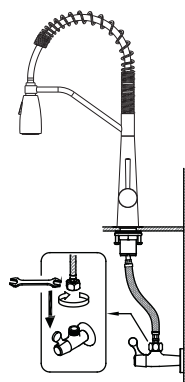


- 4. Connect hot and cold inlet hoses to the angle stops. Tighten with a wrench until snug. Turn on hot and cold angle stops and check for leaks.**

Antes de la Instalación

1. Asegúrese de tener todas las piezas necesarias verificando el diagrama y la lista de piezas.
2. Asegúrese de que su fregadero sea compatible con el tamaño del grifo de cocina.
3. No desmonte el cuerpo principal del grifo, ya que ha sido instalado y ajustado correctamente y con precisión antes de la entrega desde la fábrica.
4. Cierre los suministros de agua caliente y fría antes de comenzar.
5. Para evitar que el grifo se atasque, enjuague la tubería de agua antes de la instalación.
6. Al terminar la instalación, verifique todas las juntas y conexiones en busca de fugas.




Lista de Piezas Estándar

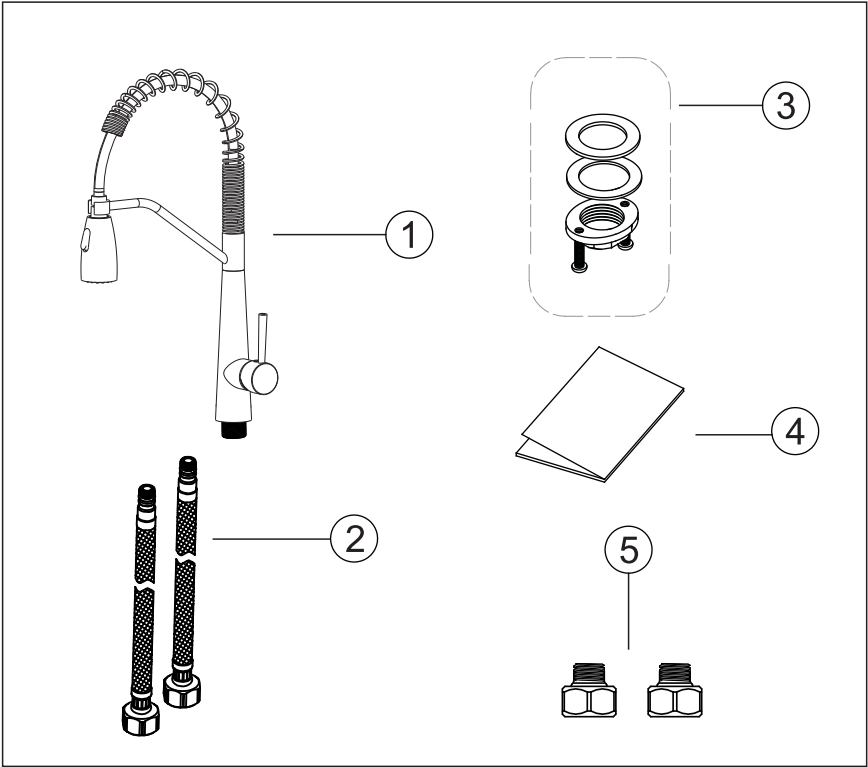


N.º	Nombre de la pieza	Cantidad
1	Cuerpo del Grifo	1
2	Tuberías de entrada de agua fría y caliente	1 juego
3	Ensamblaje de tuerca del tubo de desagüe	1 juego
4	Cuerpo del Grifo	1
5	Adaptador de G9/16 a NPT1/2	2


Paso de Instalación

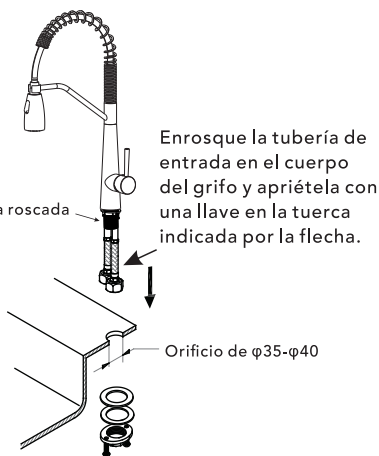


1. Retire el ensamblaje de la tuerca del tubo de desagüe de la tubería roscada. Las dimensiones del recorte en la encimera son las indicadas en el diagrama.

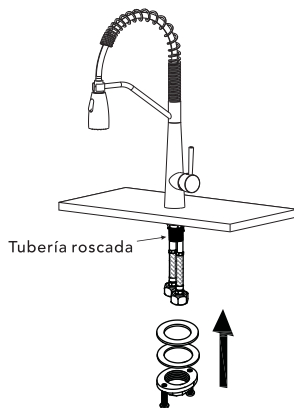

2. Inserte el cuerpo del grifo en el orificio de la encimera. Fije el ensamblaje de la tuerca del tubo de desagüe en la conexión de la tubería roscada debajo del fregadero en el orden correcto y apriételo con un destornillador.

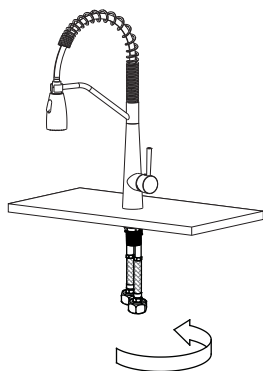

3. Ajuste la dirección del cuerpo del grifo.

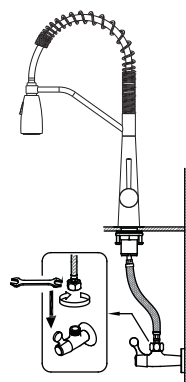

4. Conecte las mangueras de entrada de agua caliente y fría a las llaves de paso. Apriételas con una llave hasta que queden bien ajustadas. Abra las llaves de paso de agua caliente y fría y verifique si hay fugas.