





SPECIFICATIONS



Features/Benefits

- 1.75 gpm (6.6 L/min) Maximum Flow Rate @80psi
- Includes Treysta™ Pressure Balance Ceramic Disc Cartridge
- Requires Treysta™ Rough-In Valve, G00GS500 Series (Horizontal Inputs) or G00GS520 Series (Vertical Inputs)
- Diverter on Tub Spout
- Includes Single-Function Vaughn Showerhead, D460218
- 6" Metal Shower Arm
- Accommodates Standard, Back-to-Back, and Thin Wall Installations

Available Color/Finishes	Standards & Certifications	Flow Rate
Color	Description	
Chrome	  Please see danze.com or current price list for available finishes. Finish is defined by additional suffix.	  <p>The graph plots GPM (gallons per minute) on the y-axis (0 to 8) against PSI (Pounds per square inch) on the x-axis (0 to 80). Two curves are shown: a solid line representing the cartridge's maximum flow rate, which increases from approximately 3.5 GPM at 20 PSI to 7.5 GPM at 80 PSI; and a dashed line representing the 1.75 GPM shower head flow rate, which remains constant at 1.75 GPM across the pressure range.</p>

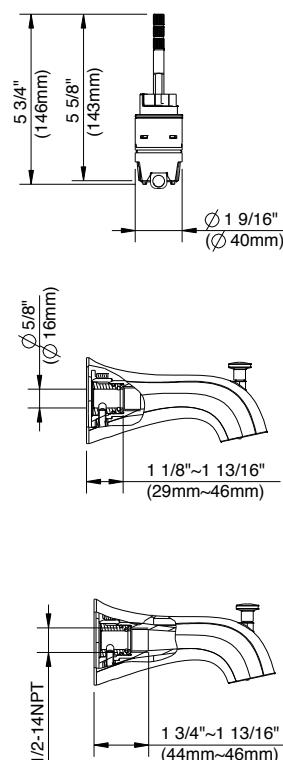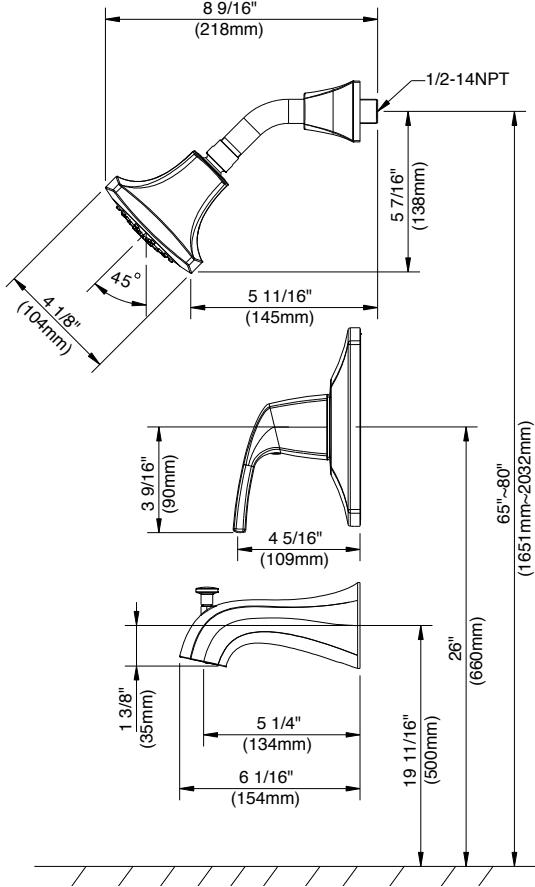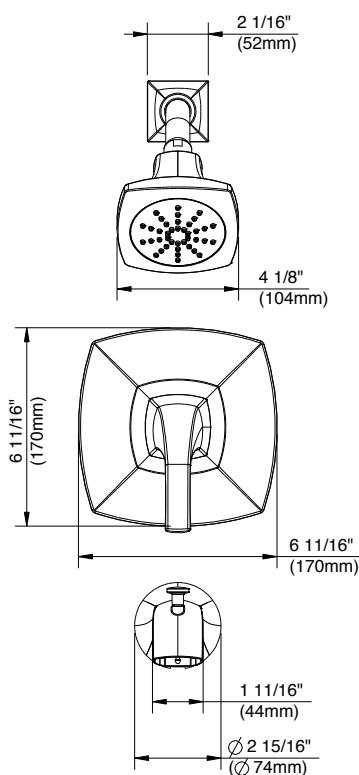

Submittal Information:

Name: _____

Contractor: _____

Location: _____

Contact #: _____