# FAYMART® by Hukoro





- Inspect the wire insulation for any cuts, abrasions or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

















If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com

\* PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

### HARDWARE INCLUDED

Wire Nuts

Post —— (not included)

Accommodates a 3 in. post (not included)










**Ball Nuts** 


**Rubber Rings** 


Wire Nuts



# INSTALLATION STEP 1


Unscrew the **mounting screws** from the **fixture**.





### STEP 2


Make the electrical connection from the **post** (not included) to the **fixture**. Connect the live wire, neutral wire and ground wires with the supplied **wire nuts**. Secure with electrical tape.

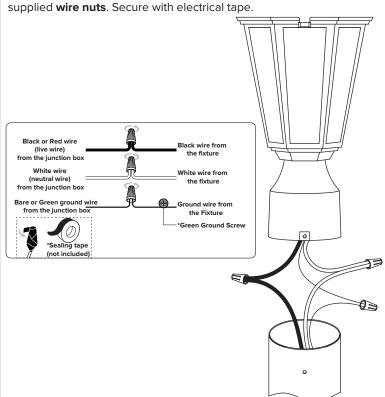

## STEP 3


Attach the **fixture** to the **post** (not included) through screw holes as shown, and secure it with **mounting screws** 

# \*Accommodates a 3 in. post (not included)

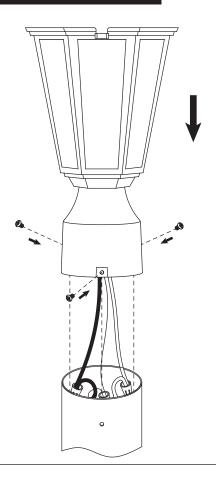

### STEP 4


Install bulb (not included).

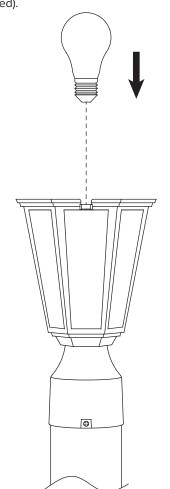



# STEP 5

- 1. Remove the **hex nut** and **washer** from the **finial**.
- 2. Use the hex nut and washer to attach the finial to the cover.



## STEP 6

- 1. Remove the **rubber rings** and **ball nuts** from the **cover**.
- 2. Use the rubber rings and ball nuts to attach the cover to the fixture.

