# **CounterBalance®**

## Hybrid Bracket

### **CCH-CBHB**



#### **Installation Instructions**


The CounterBalance Hybrid Bracket provides secure installs to support stone and solid surface countertops on handicap accessible vanities, and other "floating" work surfaces. The Hybrid Bracket can be installed either as a surface mount of a concealed bracket.

Check out our installation videos: youtube.com/user/ShopCB

#### **Hybrid Bracket Install**

- 1) Select the appropriate size bracket for your counter surface. The overhang should be maximum of 6" longer than the bracket and a minimum of 3" to reduce visibility.
- 2) Locate the wall studs and hold the bracket directly over stud at the desired height. (Brackets must be installed into wall studs. Drywall anchors should not be used)
- 3) Mark on the wall the locations of the holes to be drilled, set the bracket aside.
- 4) Drill 3/16" pilot holes on the marked locations. Place bracket back into position and secure with 1/4" lag bolts.
- 5) Check for level and shim if necessary. Use included plastic caps to cover screw holes.
- 6) Repeat for additional brackets. Brackets should be placed every 16-20" for optimum performance.
- 7) Apply a silicone sealant to the top of the brackets to secure the counter surface to the brackets.

Supports should be spaced no more than 16" to 20" apart for optimum performance

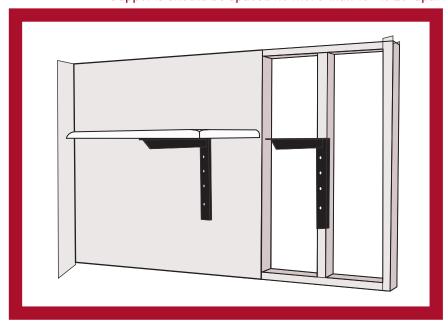





The **CounterBalance Hybrid Bracket** is an easy install to support overhangs on stone and solid surface countertops. These products give your customers alternative to banging their knees on pricey corbels and provide superior support and security. These low-profile brackets are hidden from view offering a clean, modern look.

