



V12 R1.0

Installation and Operating Manual

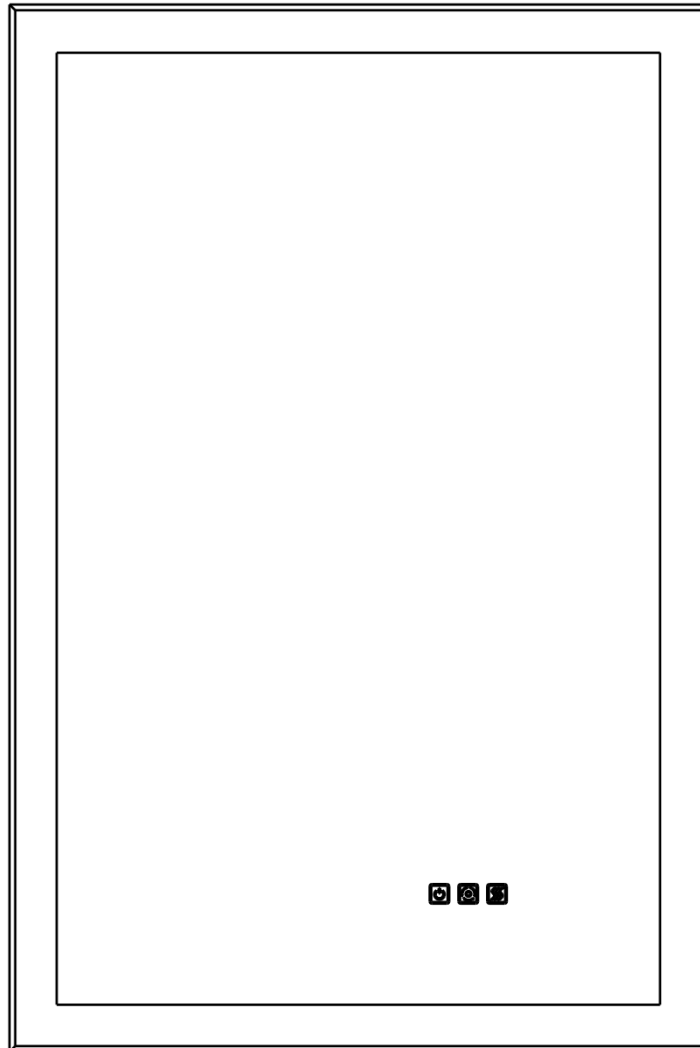


For technical support or questions, please call us at + 1 302 336 8180

Model Specification

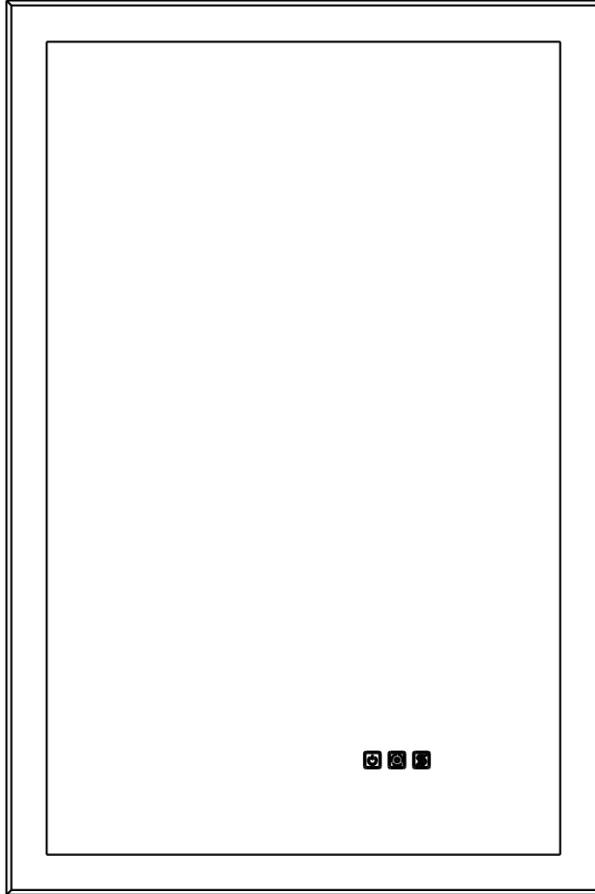

- Aluminum Frame
- Integrated LED
- Horizontal or Vertical installation
- Color Temperature:3000-6500K
- Dimming
- Anti Fog

No.	Dimension	Color	Installation	Remark
1	24"×32"	Black	Horizontal or Vertical	
2	24"×36"	Black	Horizontal or Vertical	
3	48"×32"	Black	Horizontal or Vertical	
4	48"×36"	Black	Horizontal or Vertical	
5	55"×30"	Black	Horizontal or Vertical	
6	60"×36"	Black	Horizontal or Vertical	



For easy and safe installation, please refer to the following:

Read all instructions thoroughly before installing the enclosed product. Read and take note of all **Safety Precautions**, care and maintenance information.

PLEASE KEEP THIS INSTRUCTION MANUAL FOR FUTURE REFERENCE DURING PRODUCT OPERATION AND MAINTENANCE.



WARNING AND SAFETY INSTRUCTIONS

Before installing your LED Lighted Mirror, please make sure that you carefully read through this instruction sheet, refer back to them during installation to ensure your product is fitted safely and correctly. Keep the instruction for future use.

WARNING Risk of Fire and Electric Shock

- All fittings must be installed in accordance with current IEE wiring regulations. If in doubt, please consult a qualified electrician.
- Turn breaker off the electrical supply at the main circuit board before installation and maintenance.
- Suitable for indoor use only. This product should be positioned well away from curtains and fabrics. Never cover the mirror.
- Regularly check any parts for damage, if any part is damaged the product should not be used.

INSTALLATION SAFETY

- Inspect the product immediately upon receipt for any possible damage during transportation or missing parts. Handle the product with care and protect against knocks to all sides and edges of the glass.
- Ensure there are no hidden pipes or cables in the wall before drilling and sawing.
- Wear suitable safety glasses when drilling. Take care if drilling on tiled surfaces in case the drill slips.

CAUTION

The light source of this product is non-changeable light diodes (LED). **Do not disassemble the product**, as the light diodes can cause damage to the eyes.

NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture. Do not install this fixture in hazardous locations.

PARTS SUPPLIED

**Bottom Mount
Bracket**

× 1~2




Anchor Screws

× 6~8



Anchors

× 6~8




TOOLS REQUIRED


Drill




Pencil



Level

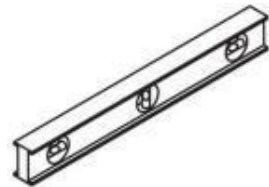

Tape



Gloves




Safety Glasses




**Phillip
Screw Driver**



**Drill Bit
8mm(5/16")**



Hammer



Installation Instruction


Safety First! Wire Connection Guide

There are two ways to connect the power. You can connect the wires directly to your junction box or insert the plug directly into the wall socket.

Grounding Instructions: This product must be connected to a grounded metal permanent wiring system or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment grounding terminal or lead on the product.

PLUG IN

Insert the plug to the socket

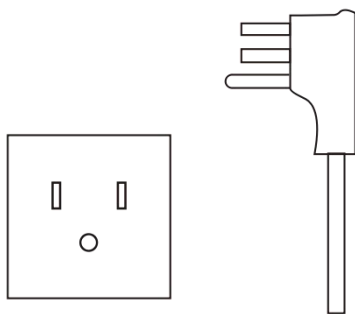


HARDWIRED

Cut the electric wire and make connection with junction box.


DEVICE

Junction box (not included).

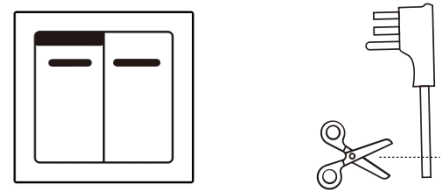


DANGER: Before installation , make sure the main power is cut off.


HOW TO CONNECT THE WIRES

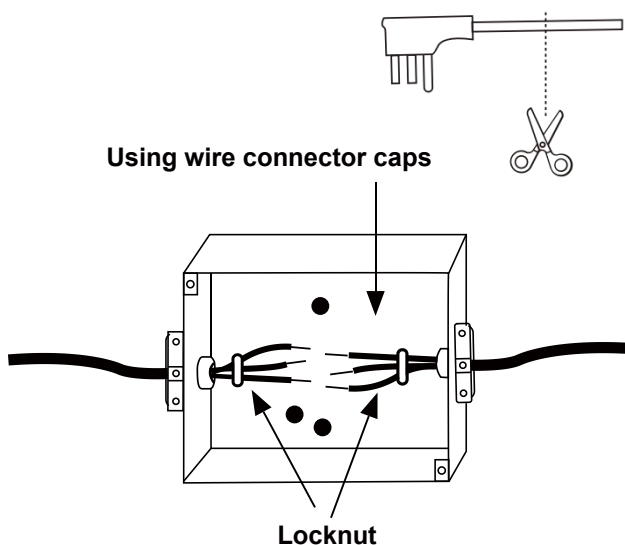


★ junction box is not included ★

BLACK WIRE --- POWER SUPPLY L (LINE)
WHITE WIRE --- POWER SUPPLY N (NEUTRAL)
GREEN WIRE --- POWER SUPPLY G (GROUND)

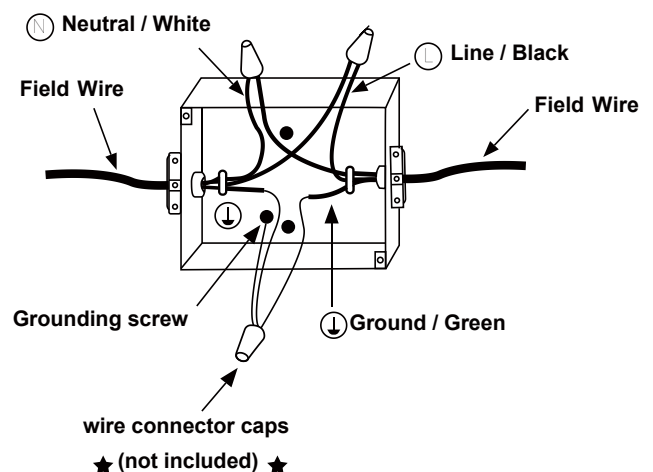


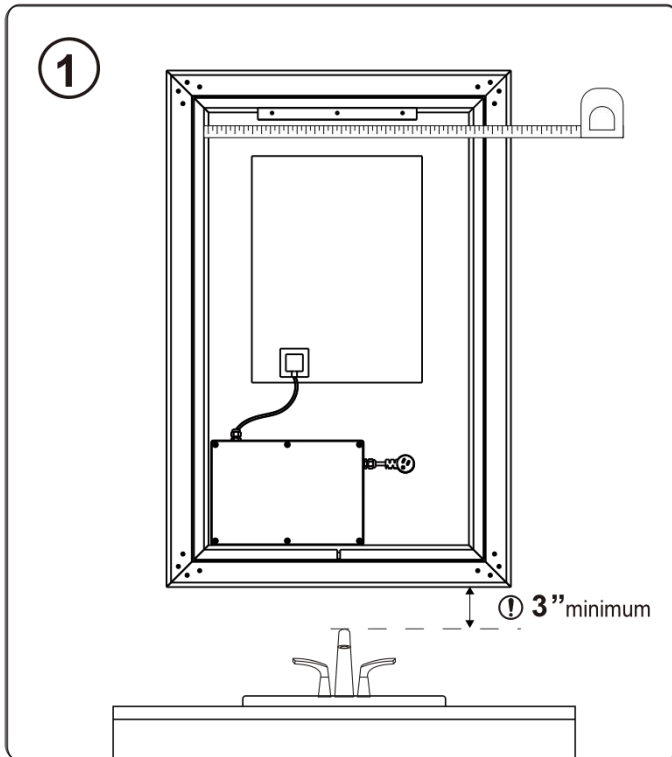


Measure the length of the built-in installation bar on the back of the mirror.

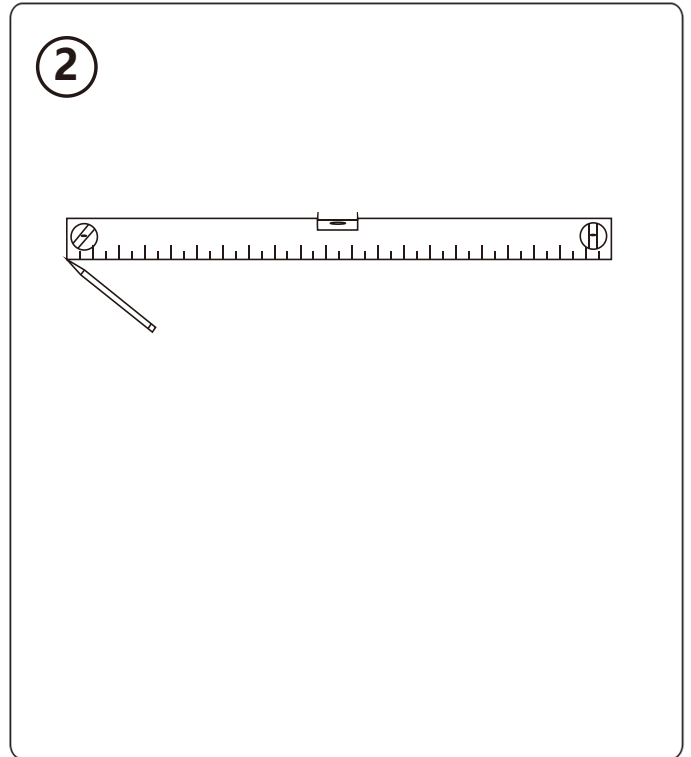


Draw a horizontal line on the wall that matches the length of the installation bar.

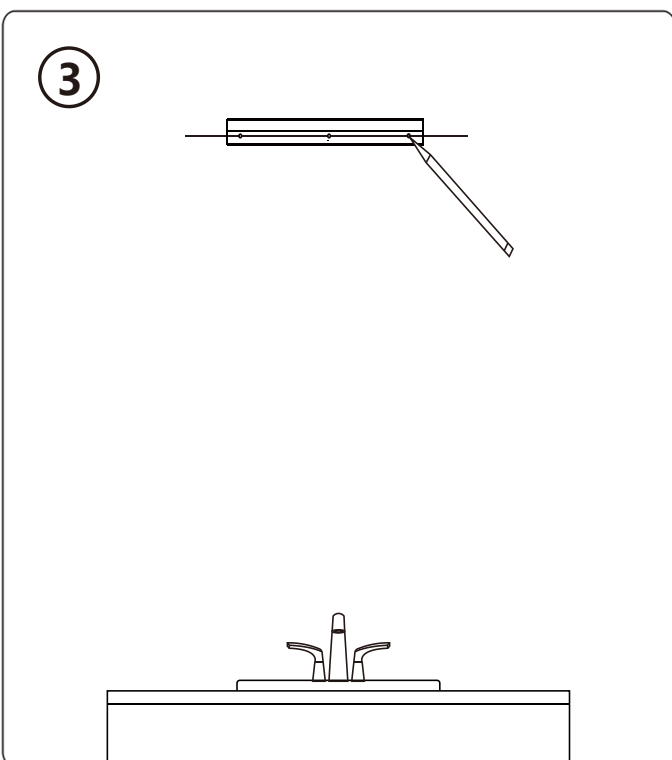


Align the holes on the hangers with the line and make marks.

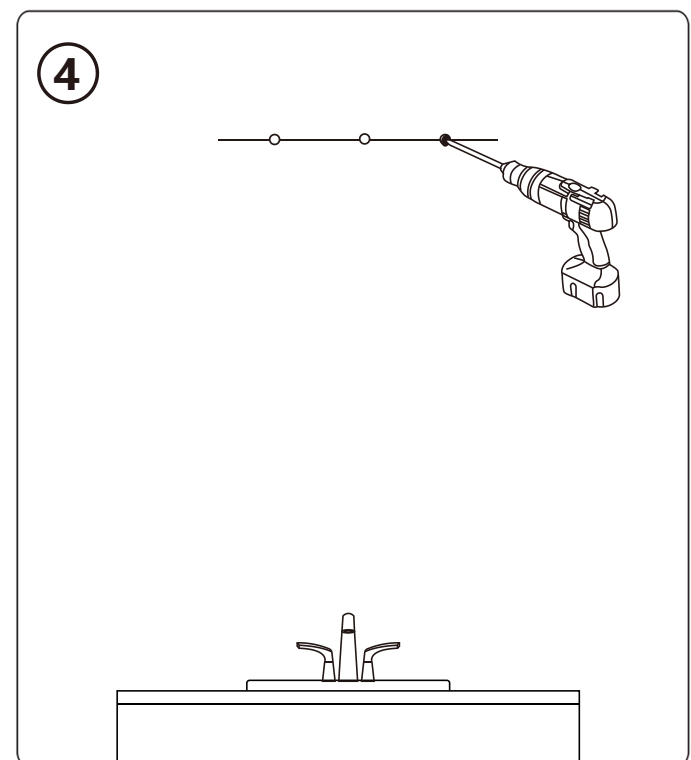


Use an electric drill to punch holes at the marked spots.

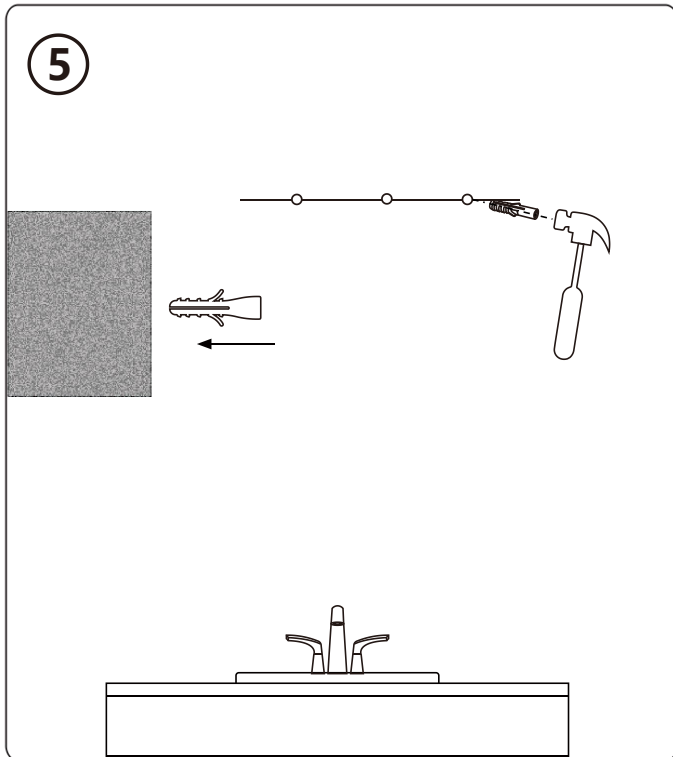


Plug the plastic anchors into the holes

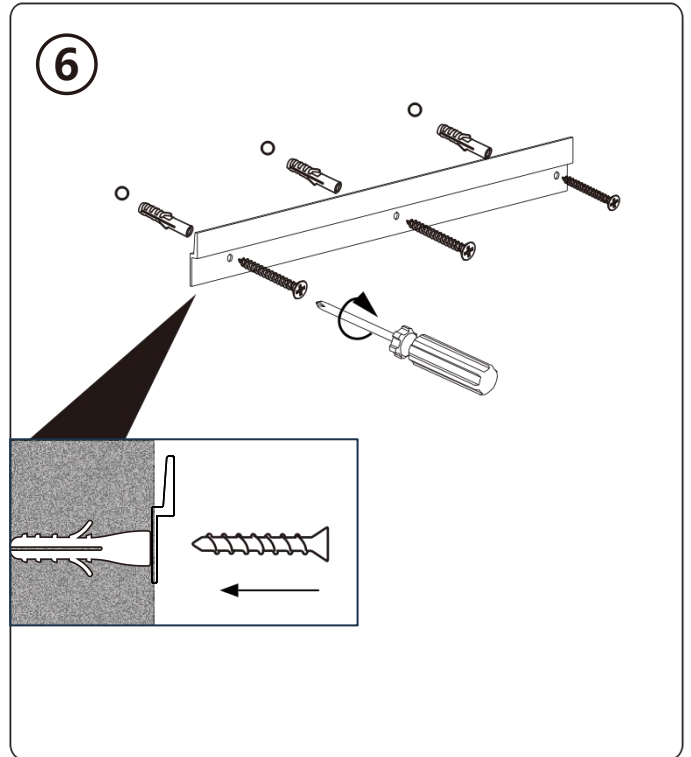

Mount the bracket to the wall with screws.

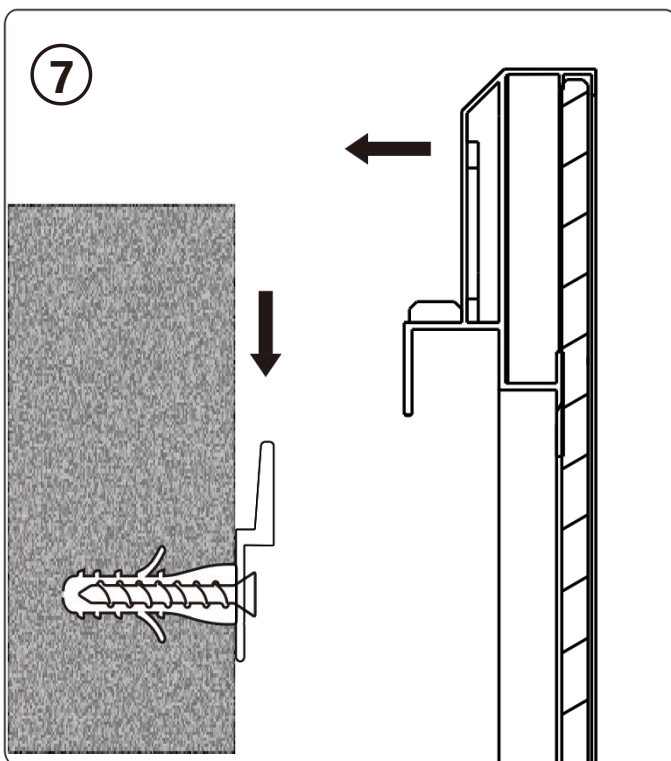


Connect the power supply (ref. to page 7);
Insert the pendant into the groove on the
back of the lamp mirror.

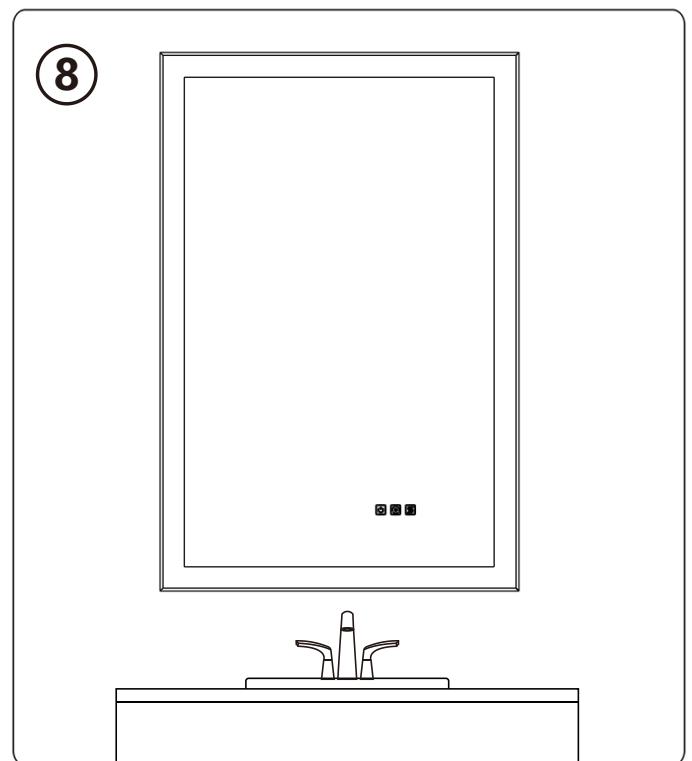

Confirm if the installation is secure.

Operating Manual

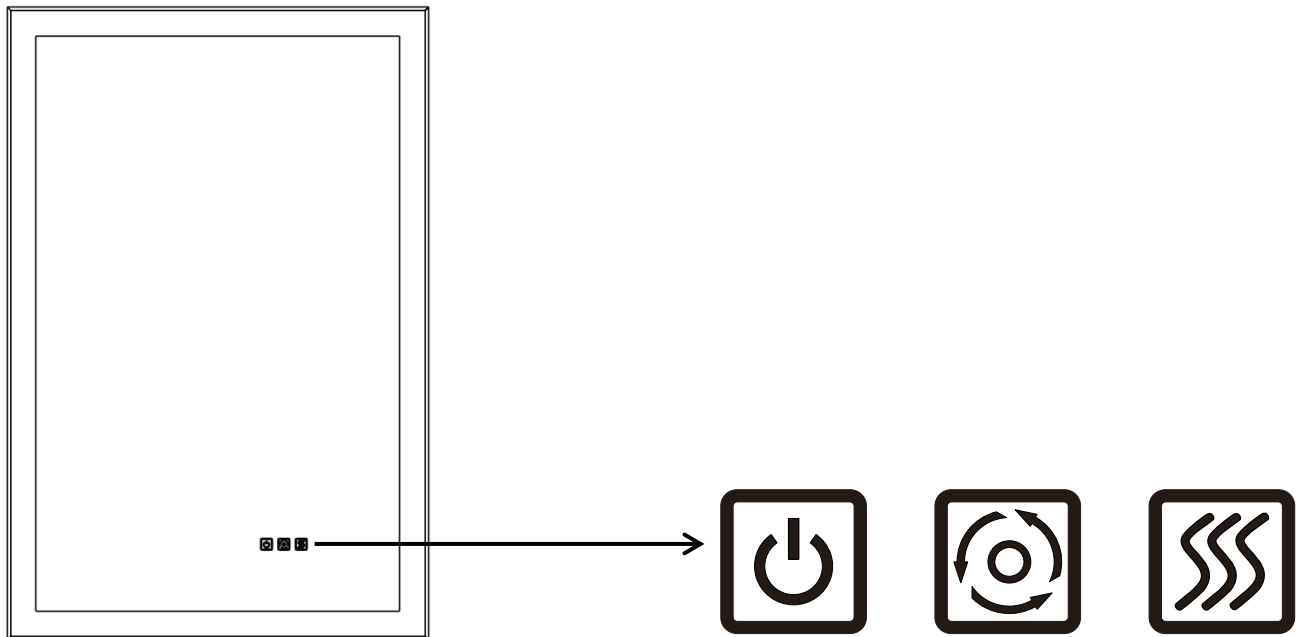

The buttons turn blue when connected to the main power supply and turn white after a brief touch. Optional to be wired to wall switch by ON/OFF memory function.



- Briefly touch the button to control on/off the light and illumination modes.
- The first touch is to turn on all the lights, the second touch is to turn on only the front light, the third touch is to turn on only the back light, and the touch again turn off all the lights, and so on.
- Press and hold the button to adjust the brightness when the mirror is on.
- If there is no operation within 15 seconds, touching this button will directly turn off the lights.



- Briefly touch the button to change the color temperature among the 3000K, 4200K and 6000K when the light is on.
- Press and hold the button to change the color temperature steplessly.



- The mirror begins to warm up and defog after you press the defogger button.
- Press the button again to turn off the anti-fog function.
- **Press and hold the button to turn the blue backlight on or off.**
- Note: To prevent damage from prolonged high temperatures, the defogger will automatically stop after 60 minutes of continuous operation.