


REMOTE CONTROL INSTRUCTIONS


REMOTE SIGNAL PAIRING:

If the remote control loses signal of the fan, press and hold the button ⑨ at the very beginning after it's turned on from wall switch. After the fan light flashes or beeps, it's done.

- ①: Turn off power.
- ②: Turn on / off the light.
- ③: Turn on the fan on 1/2/3/4/5/6 speed.
- ④: Fan moves forwards.
- ⑤: 1H for timing the fan.
- ⑥: Natural wind, fan speed will change automatically with this function.
- ⑦: Turn off the fan.
- ⑧: Fan moves reversely.
- ⑨: 2H for timing the fan.
- ⑩: Turn on/off the mute mode.

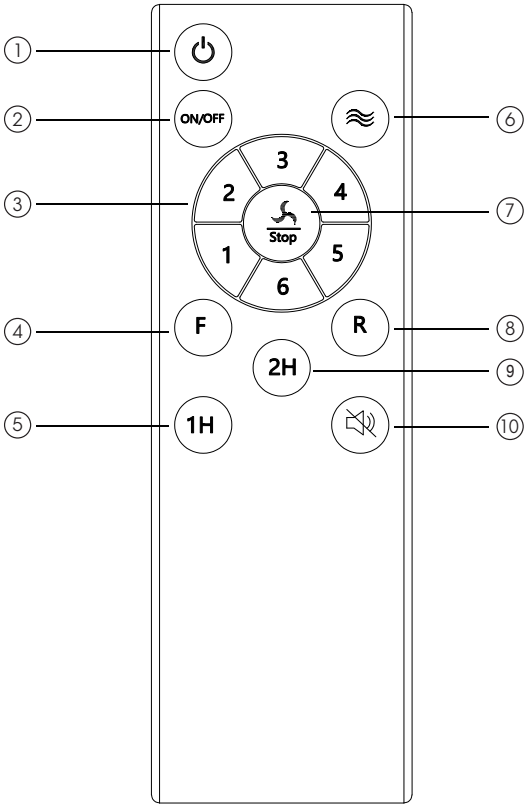

APP CONTROL INSTRUCTIONS

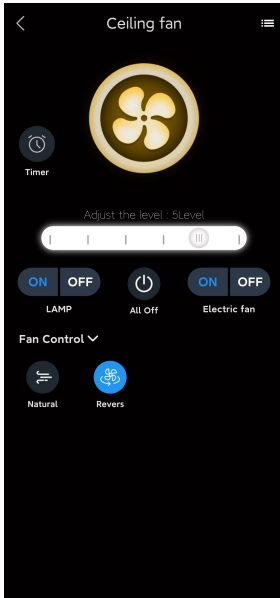


Note: Install the "Tiny Smart" app from Google Play, Apple App Store, or other app stores by scanning the QR code or searching for the app name. Ensure that your phone is connected to the internet and Bluetooth enabled.

Pairing: Add device → Follow the APP operation to turn off the wall switch, and turn it on after 5 seconds. The device will automatically connect to the Ceiling Fan.	
	Slide to adjust the Fan Speed.
	Turn on/off the light.
	Turn on/off the fan.
	Turn off the fan and light.
	1H-8H for timing the fan.
	Natural Wind: Simulate natural wind and automatically adjust the wind speed.
	Fan forward & Fan reverse.

INSTALLATION
MANUAL

CEILING FAN WITH LIGHT

Model No.: LL-8837X-42-01

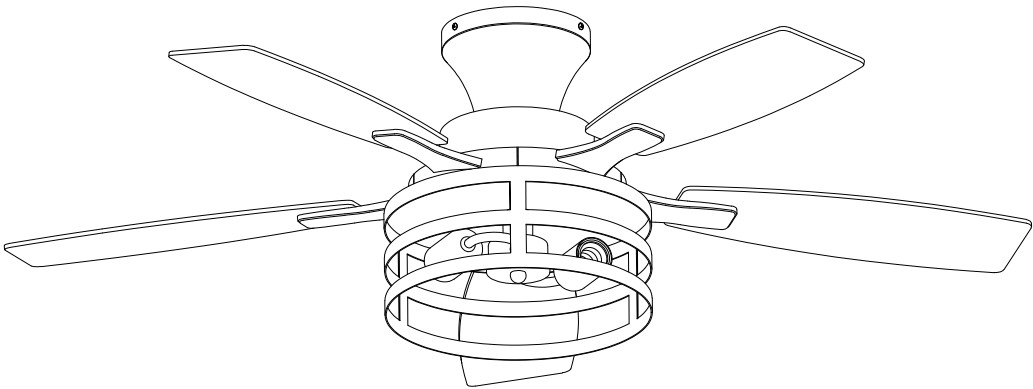


APP Control Applicable


TOOLS REQUIRED




Ladder



Pliers




Wire Strippers









Screwdrivers

PACKING LIST

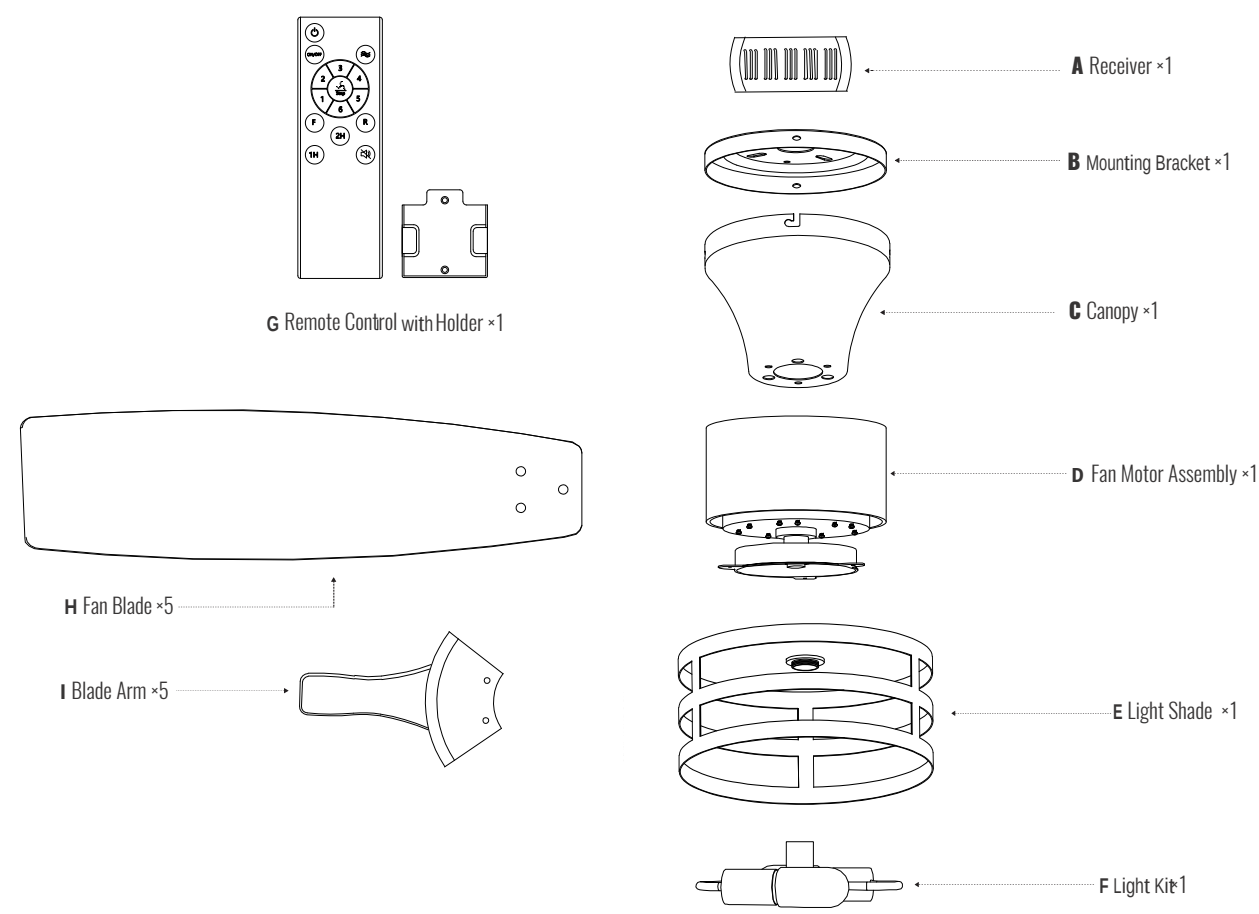


INSTALLATION KIT

AA  Wire Nut 3×	BB  Fan Blade Screw 15×	CC  Gloves 1×	DD  Fan Blade Arm Screw 10×
EE  "S" Hook 1×	FF  Outlet Box Screw With Washer 2×	GG  Canopy Screw 4×	HH  Nipple Kit 1×

- NOTE:**
- 1. Some extra hardware may be included. The quantity listed above is the number required for installation.
 - 2. Parts "DD" have been installed with Fan Motor Assembly, parts "GG" have been installed with Canopy. They need to be disassembled before installation.


9. Install the Light Kit

- Step 1. Connect the Light Wires from the Light Kit to the fixture wires.
- Step 2. Fix the Light Kit onto the Light Shade (the Nipple passes through the Light Kit).

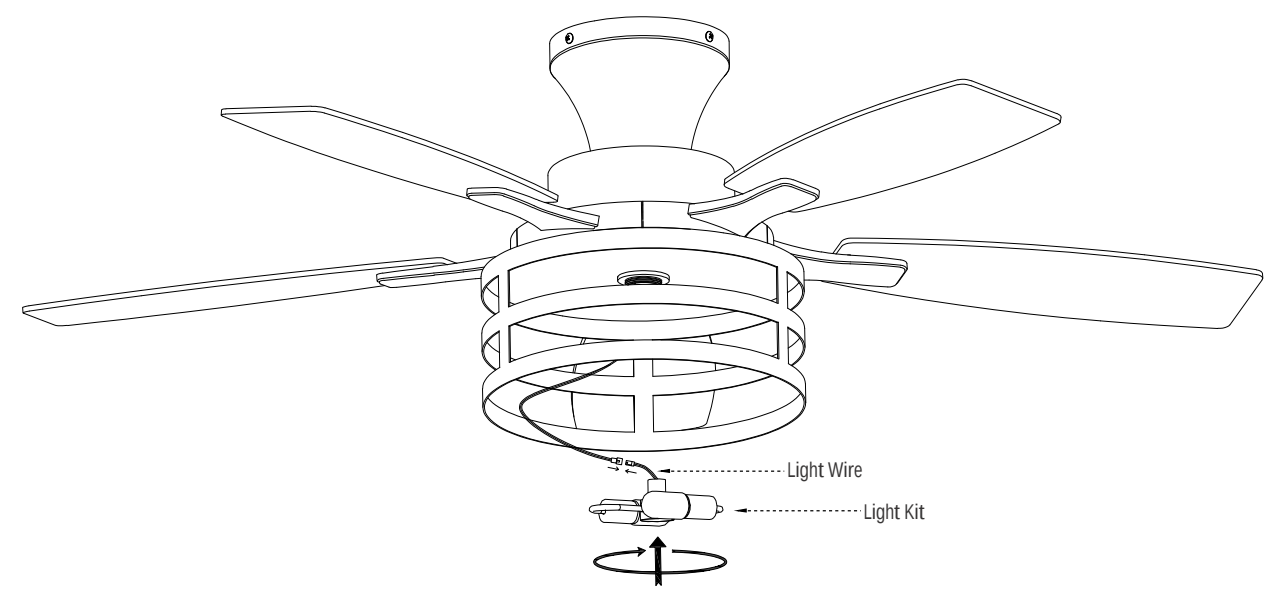


10. Install the Nipple Kit and Bulbs

- Step 1. Thread the Nipple through the hole in the Cover and secure it with Nut.
- Step 2. Install 2 E26 Bulbs not exceeding 60W.

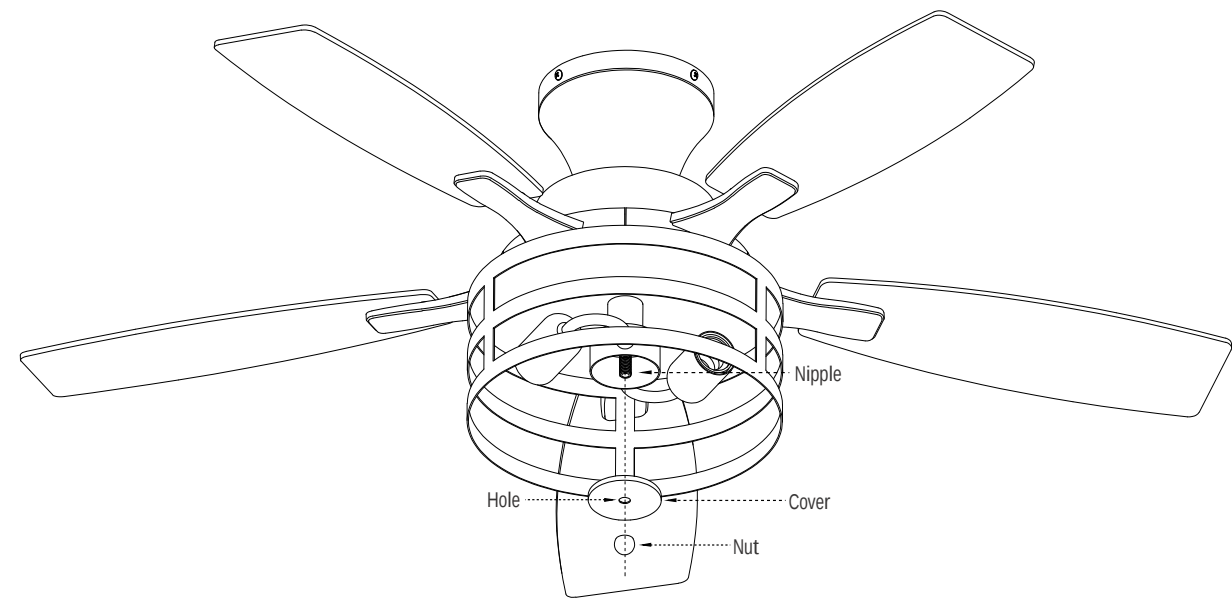


7. Install the Light Shade

- Step 1. Take off one Set Screws from the Fan Motor Assembly.
- Step 2. Align the Light Shade with the fixing screw and rotate counterclockwise to temporarily secure it.
- Step 3. Attach the Light Shade onto the Fan Motor Assembly with screws taken off.

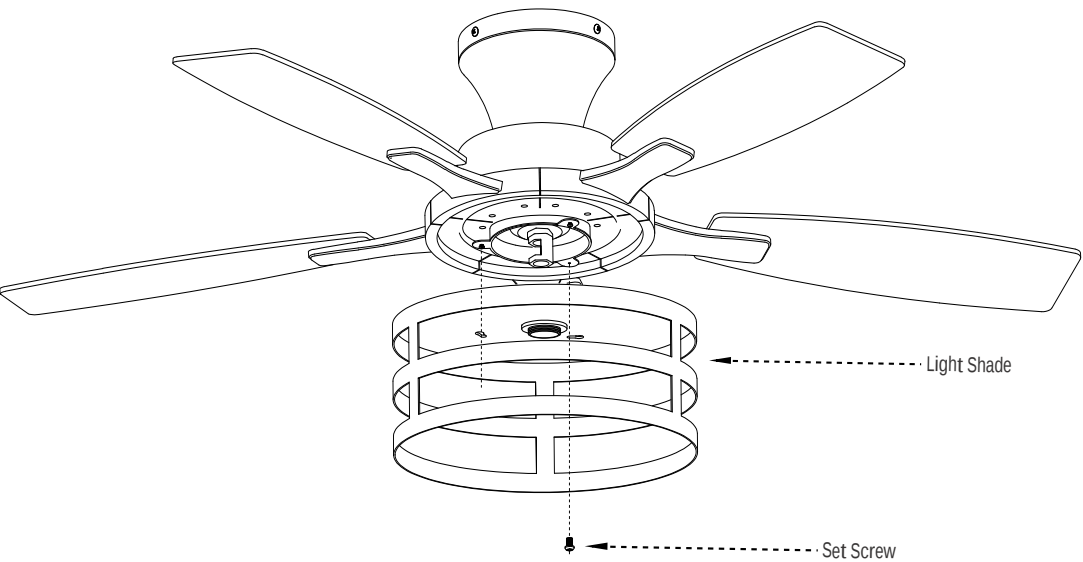

8. Attaching the Nipple


- Step 1. Attach the Nipple (HH) in the Fan Motor Assembly.

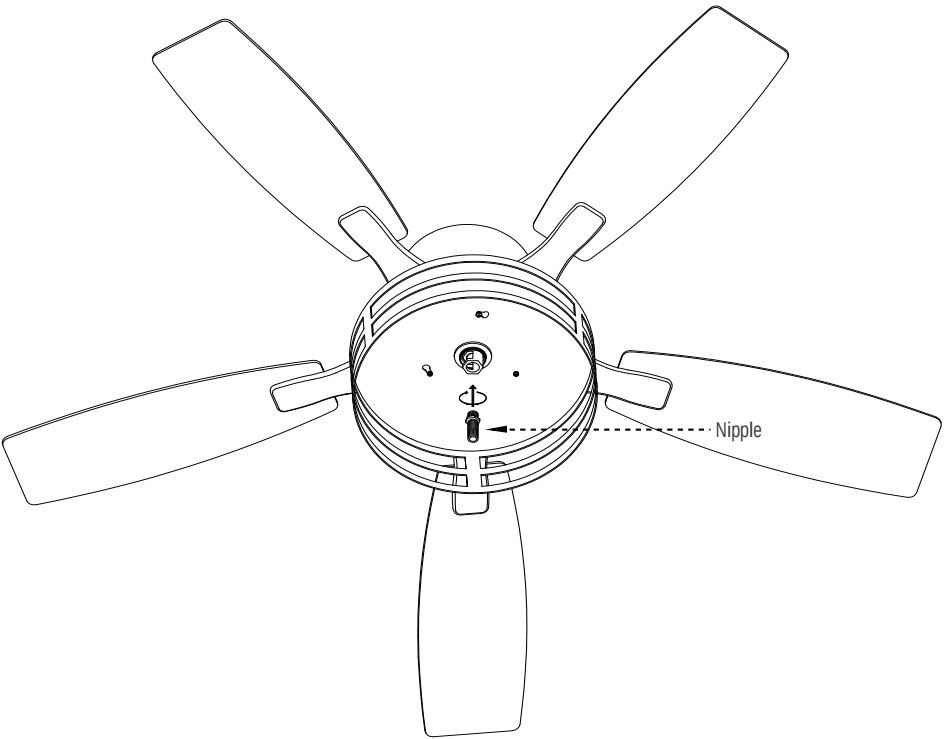

INSTALLATION


1. Remove the Mounting Bracket

- Step 1. Loosen and remove the Canopy Screws (GG) from the round holes, and loosen the canopy screws in the 'L' holes but do not remove them.
- Step 2. Take out the Mounting Bracket from the canopy.

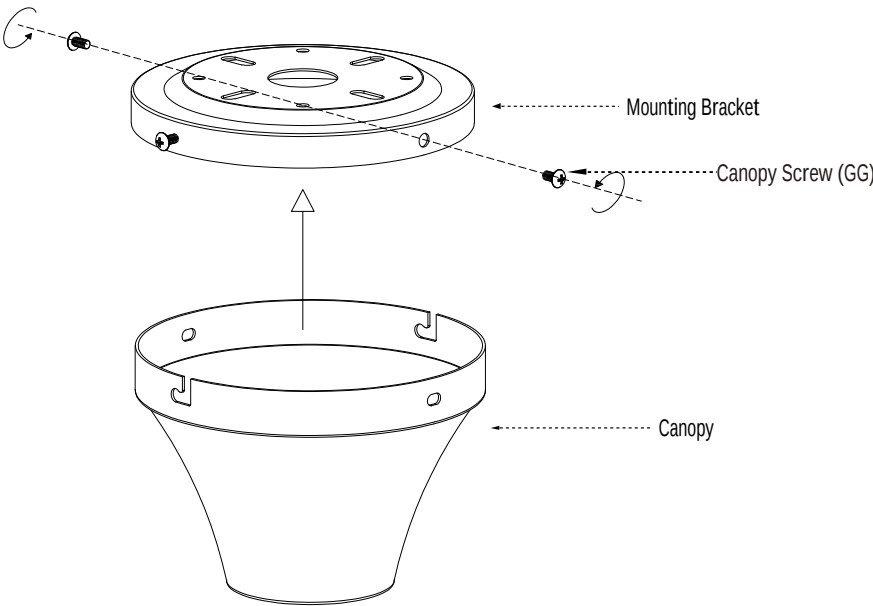

2. Install the Mounting Bracket


- Step 1. Take off the screws from outlet box.
- Step 2. Secure the Mounting Bracket onto the outlet box with screws taken off or Outlet Box Screw with Washer (FF) provided.

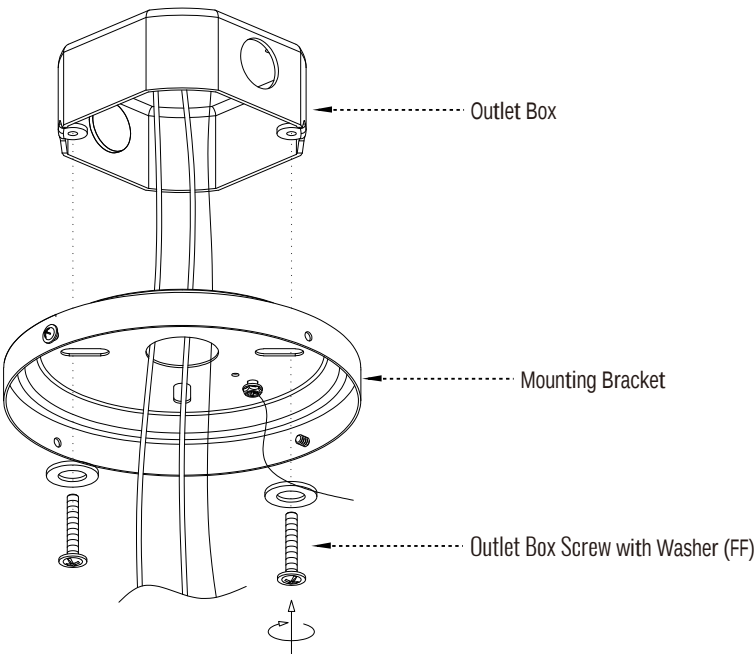

3. Assembling the Canopy

Step 1. Take off three Fixing Screws on the Fan Motor Assembly as shown in the diagram, then thread the Main Wire through the Canopy.

Step 2. Align the Small Holes on the Canopy with the Screw Holes on the Fan Motor Assembly (the other screws which were not taken off were threaded through the Large Holes on the Canopy) , and secure the Canopy to the Fan Motor Assembly with Screws taken off.

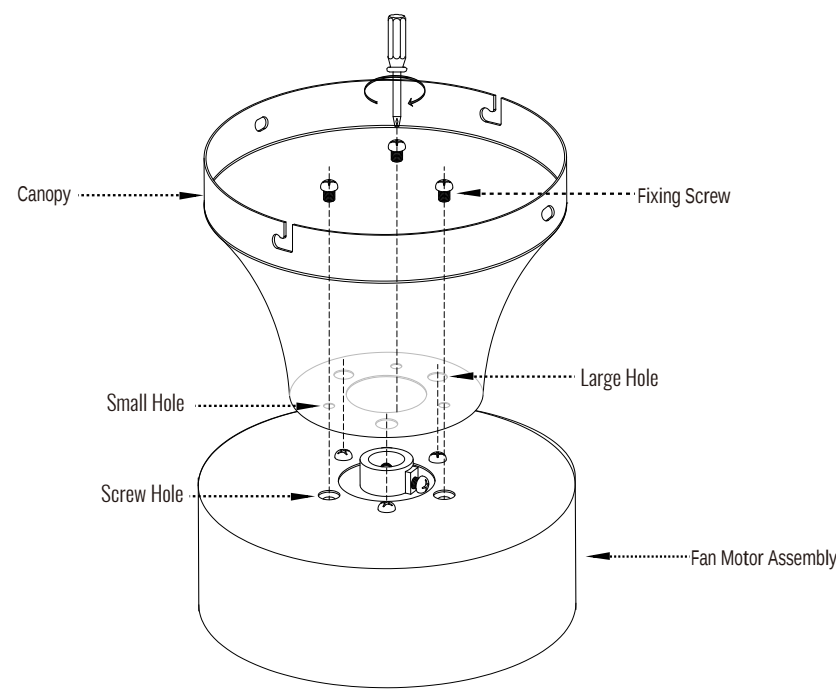


4. Wring

Step 1. Hang the Fan Assembly onto the Mounting Bracket with "S" Hook (EE) provided.

Step 2. Connect the wires from the fixture to the house supply wires with wire nuts (AA) , ground wire (green, green/yellow, or bare copper) to ground wire, neutral wire (white or blue) to neutral wire, and hot wire (black or brown) to the hot wire.

Step 3. Wrap the connection with electrical tape.

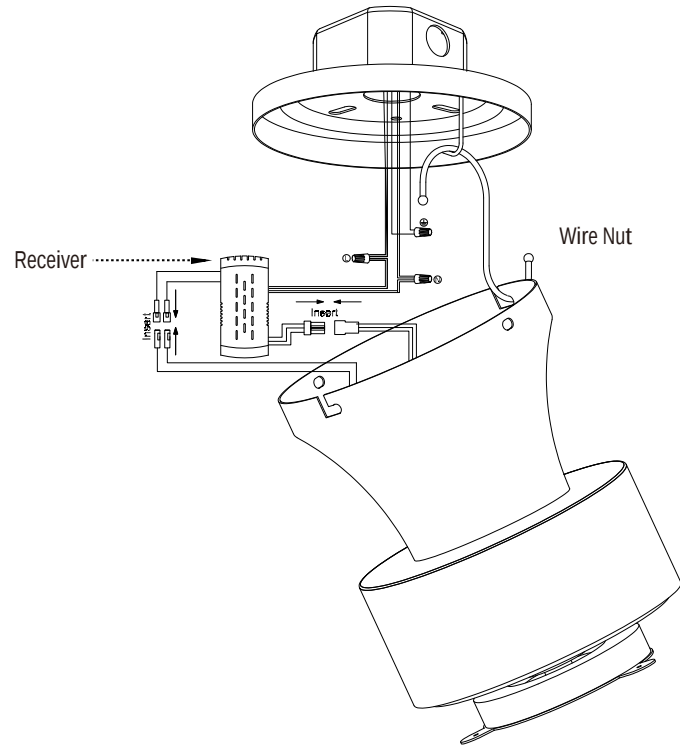

Note:


① This fan only needs one set of input wires (black, white, and ground wire). Both of the fan and lights will be controlled by the remote control.

② This fan can only be connected to an on/off switch if you have one, not a dimmer switch.

5. Hanging

Step 1. Align the "L" slots from the Canopy to the Canopy Screws on the Mounting Bracket , rotate the Canopy to lock it onto the Mounting Bracket.

Step 2. Tighten the Canopy Screws to secure the Fan Assembly.

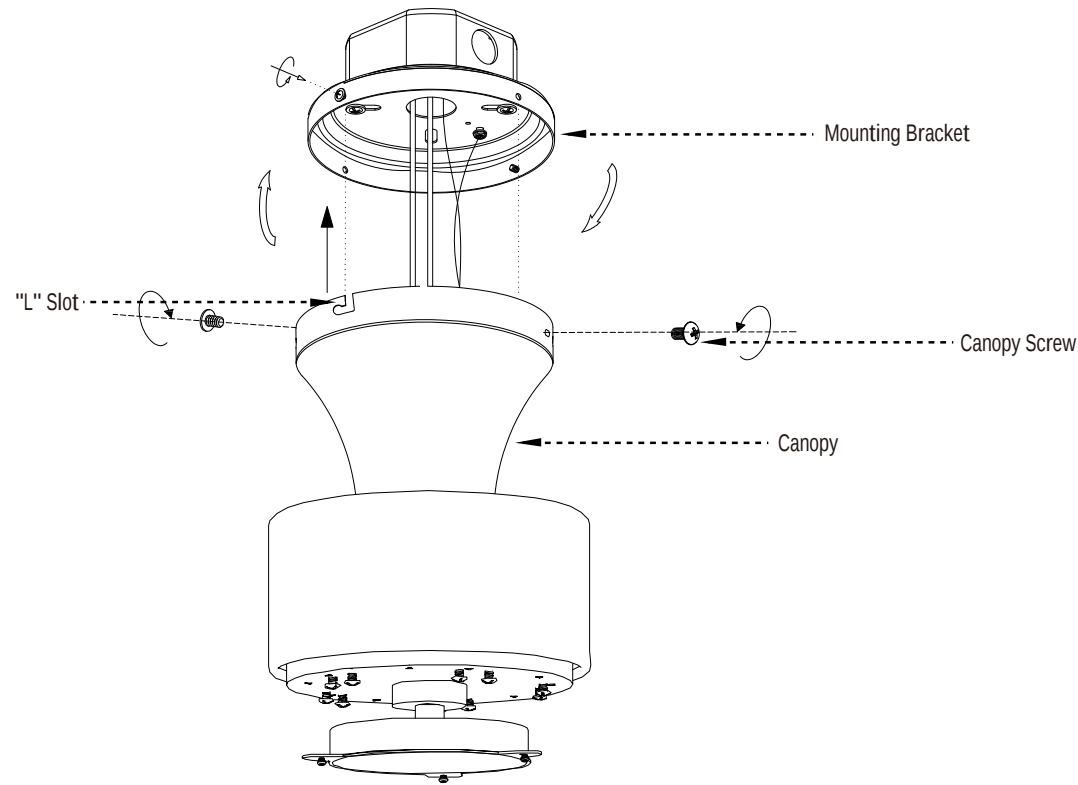


6. Installing the Fan Blade and Blade Arm

Step 1. Attach fan blade onto the blade arms with Fan Blade Screws (BB) provided.

Step 2. Take off Fan Blade Arm Screws (DD) from the Fan Motor Assembly.

Step 3. Attach the Fan Blade Arm onto the motor with the Fan Blade Arm Screws taken off.

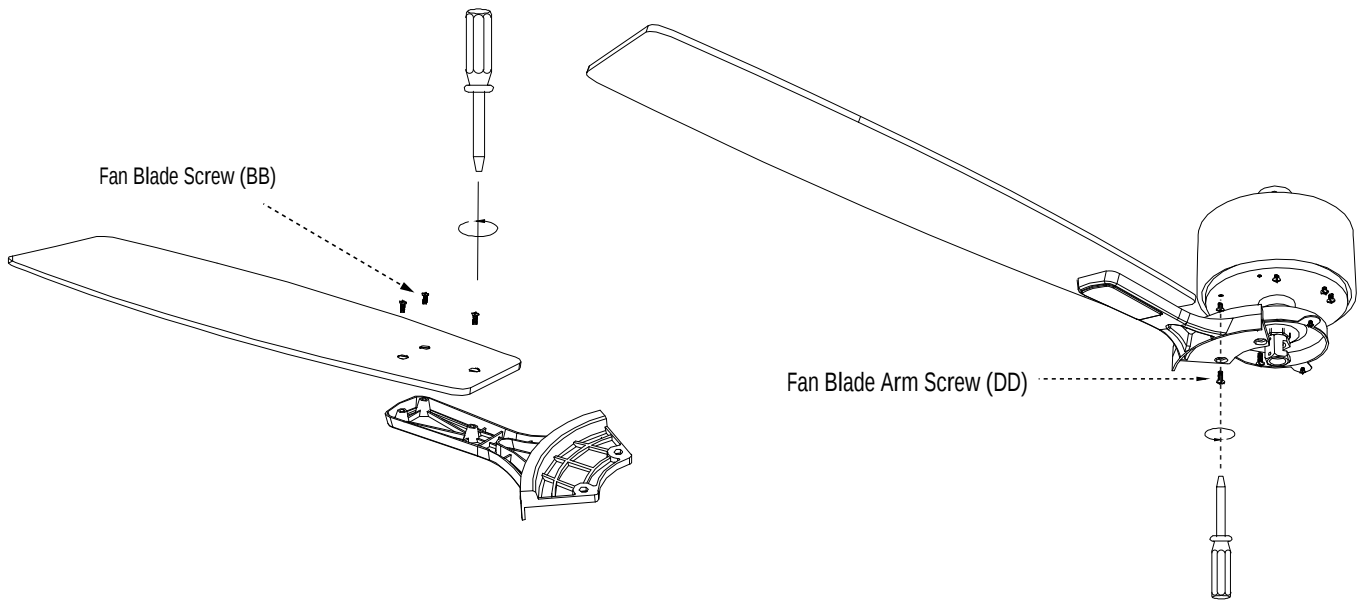

Note:

① Make sure to assemble the blades in sequence and fasten the screws with equal force.