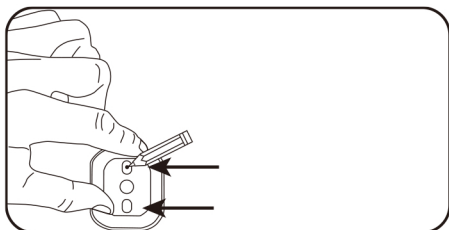
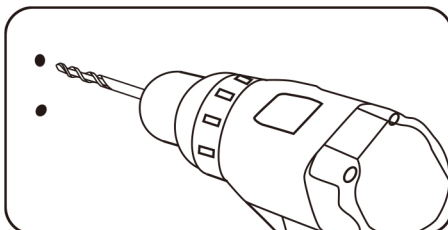
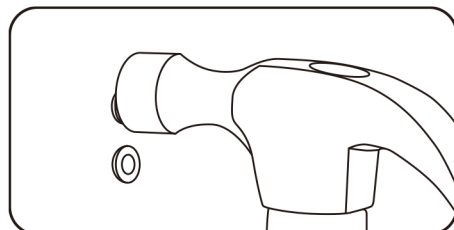
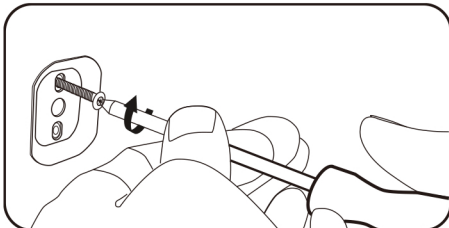
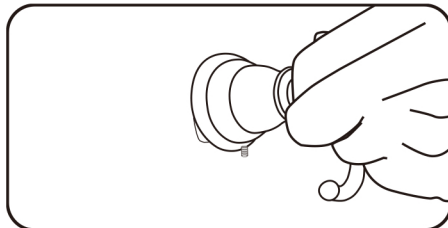
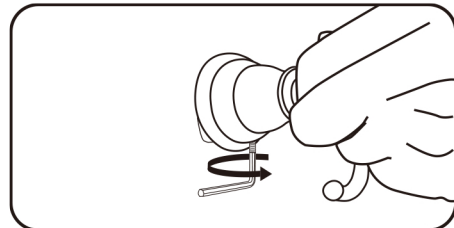


**1****2****3****4****5****6**

EN

Caution

This product contains small items that could be a choking hazard if swallowed. Keep these items away from young children.

- Make Sure these instructions are read and completely understood before attempting installation. If you are unsure of any part of this installation, please contact a professional installer for assistance.

⚠ WARNING Maximum load: 11 lbs (5 kg).

Step 1: Position the mounting bracket in the desired mounting location and mark 2 vertical holes using a pencil.

Step 2: Using a drill and 1/4" (6.35 mm) drill bit, drill two vertical holes in the location previously marked using the mounting bracket.

Step 3: Insert plastic drywall anchors into both drilled holes. Lightly tap with hammer until anchors are flush with wall.

Step 4: Position mounting bracket against anchor holes and thread screws until secure.

NOTICE When securing the mounting bracket to the wall, make sure the flat side of the bracket is against the wall.

Step 5: Using the provided Allen wrench, loosen the metal set screw located at the base of each fixture. Loosen set screw until fixture is able to rest flush over mounting bracket.

Step 6: With the fixture resting on the wall, use the provided Allen wrench to tighten the fixture onto the mounting bracket.

