


## 5206-S00 (Shallow)

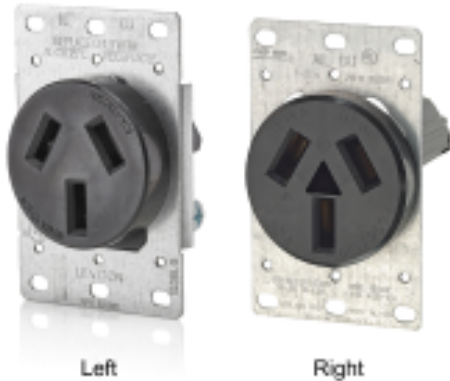

Color:  Black

UPC Code: 07847769534

Country Of Origin: Mexico

NEMA:  
10-50R



50 Amp, 125/250 Volt, NEMA 10-50R, 3P, 3W, Flush Mtg Receptacle, Straight Blade, Industrial Grade, Non-grounding, AL-CU, Side Wired, Steel Strap - Black

### WARNING:

Do not use with single-gang wallboxes, single-gang mud rings or single-gang box extenders.

Built of durable thermoplastic, Leviton Power Receptacles — come equipped with heavy-gauge, double-wire copper alloy contacts. To ensure correct and speedy wiring, terminals have ID markings. Flush mount receptacles fit Leviton's wide range of 2.15"-diameter wallplates and mounting hardware is included.

**Please confirm device face before continuing. If you have the device on the left, stay on this page. If you have the device on the right, please visit: [5206-S00 \(Deep\)](#)**

### Technical Information

AC Horsepower Ratings

**At Rated Voltage:** 3 HP

Electrical Specifications

**Amperage:** 50 A

**Current Limiting:** Full Rated Current

**Dielectric Voltage:** Withstands 2000V per UL498

**Grounding:** Non-Grounding

**Pole:** 3

**Temperature Rise:** Max 30C after 50 cycles OL at 150 percent rated current

**Voltage:** 125/250 VAC

**Wire:** 3

Environmental Specifications

**Flammability:** Rated V-2 per UL 94

**Operating Temperature:** -40°C to 60°C

Material Specifications

**Body Material:** Thermoplastic

**Color:** Black

**Face Material:** Thermoplastic

**Line Contacts:** Brass Double-Wipe

**Strap Material:** Galvanized Steel

Mechanical Specifications

**Product ID:** Ratings are permanently marked on device

**Terminal Accom.:** Up to 4 AWG

**Terminal ID:** X= Phase Y= Phase W= Neutral G= Ground

Product Features

**Color:** Black

**NEMA:** 10-50R

**Amperage:** 50 A

**Voltage:** 125/250 VAC

Standards and Certifications

**ANSI:** C73

**CSA:** 22.2 No 42, C22.2 No.14, C22.2 No.65

**File:** E13399


**NEMA:** WD-6

**NOM:** NOM - ANCE

**UL:** UL 498, UL 486E

**Warranty:** 10 Year Limited

## Wiring Diagram

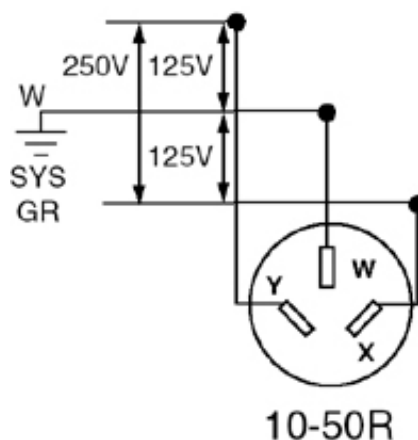

## SPECIFICATION SUBMITTAL

JOB NAME: <input style="width: 90%;" type="text"/>  JOB NUMBER: <input style="width: 90%;" type="text"/>	CATALOG NUMBERS: <input style="width: 60%;" type="text"/> <input style="width: 40%;" type="text"/> <input style="width: 60%;" type="text"/> <input style="width: 40%;" type="text"/>
--	---

### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):  
+1-800-824-3005

### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·  
FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-  
1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

