


FEATURES

- Designed for doorways that swing in
- Holes punched in top corners for easy installation
- Lightweight, durable aluminum
- Anti-slip, high traction surface
- Hardware provided to secure ramp to surface

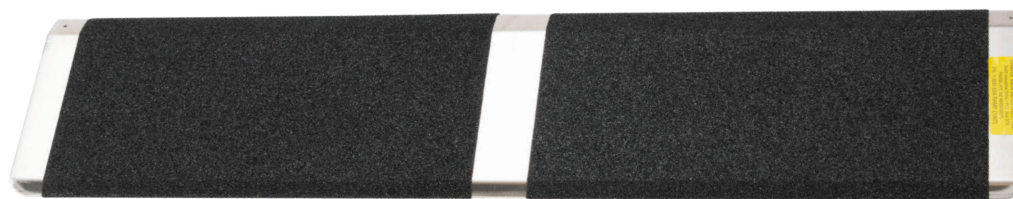

Item Number	Length	Width	Threshold Height	Weight	Capacity*
THR832	8"	32"	1/4" - 1/2"	3 lbs.	600 lbs.
TH1032	10"	32"	1/2" - 3/4"	4 lbs.	600 lbs.
TH1232	12"	32"	3/4" - 1-1/2"	5 lbs.	600 lbs.
TH1632	16"	32"	1-1/2" - 2"	6 lbs.	600 lbs.
TH1636	16"	36"	1-1/2" - 2"	6 lbs.	600 lbs.
TH2432	24"	32"	2" - 4"	2 lbs.	600 lbs.
TH2436	24"	36"	2" - 4"	15 lbs.	600 lbs.
BAR1636	16"	36"	1-1/2" - 2"	12 lbs.	800 lbs.
BAR2436	24"	36"	2" - 4"	21 lbs.	800 lbs.

Not sure which ramp length you need? Refer to pages 13-14 to help you.

* Maximum ramp capacity: 300 lbs. (One axle) – 600 lbs. (Two axles).

FEATURES

- Designed for doorways that swing in
- Holes punched in top corners for easy installation
- Lightweight, durable aluminum
- Anti-slip, high traction surface
- Hardware provided to secure ramp to surface



Item Number	Length	Width	Threshold Height	Weight	Capacity*
SSTH2436-3	24"	36"	3"	12 lbs.	600 lbs.

Not sure which ramp length you need? Refer to pages 13-14 to help you.

* Maximum ramp capacity: 300 lbs. (One axle) – 600 lbs. (Two axles).