

SPECIFICATIONS

OPULENCE™ SINGLE HANDLE POT FILLER


Model

D205057 (Replaces D205557)

Description

- Two ceramic disc valves
- 2-piece articulated spout folds out of way when not in use
- Spout reach extends up to 22"
- Designed for cold water hook up
- Installs on 1/2" IPS/NPT threaded stub-out
- Single hole wall mount

Flow Rate

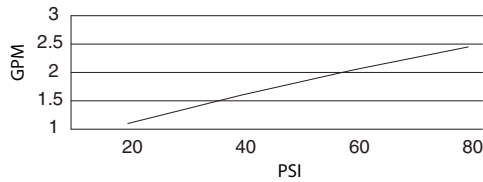

Standards




- UPC/cUPC
- NSF 61-9
- Energy policy act of 1992



- ASME A112.18.1



- CSA B125



- Meets CA AB-1953

Less than 0.25% lead content




- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms

Finishes Available

- Chrome
- Antique Copper (AC)
- Satin Black (BS)
- Polished Brass (PBV)
- Oil Rub Bronze (RB)
- Stainless Steel (SS)

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

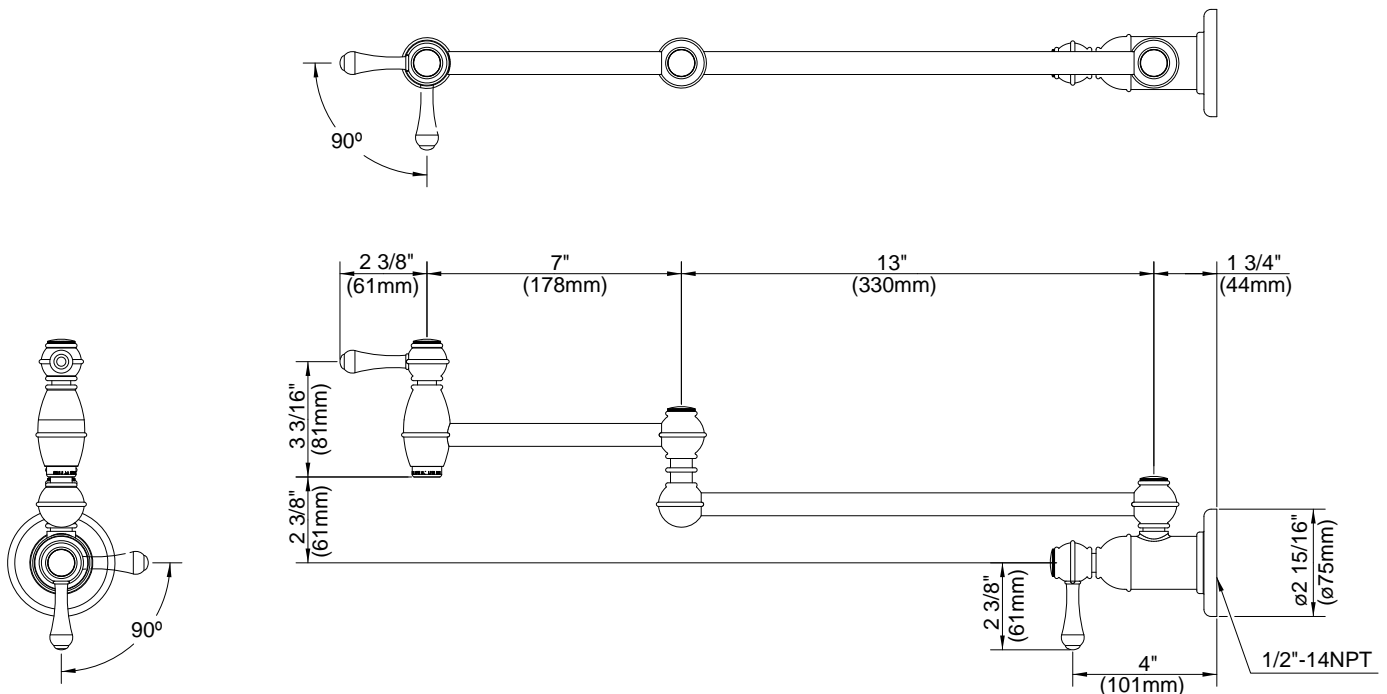

Submittal Information:

Job Name: _____

Location: _____

Contractor: _____

Contact #: _____