

## Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- 4-3/16" (107 mm) spout reach
- Stationary spout
- Metal throat plate
- Flexible connections
- Less drain and lift rod
- Red/blue indexing
- Vandal-resistant aerator
- 0.5 gpm (1.9 lpm) maximum flow rate at 60 psi (4.14 bar)

## Installation

- For 4" (102 mm) centers

## Recommended Products/Accessories

K-23726 Drain treatment  
K-23723 Faucet cleaner

## Optional Products/Accessories

1160594 .35 gpm Aerator, Large



**ADA**

**CSA B651**

**OBC**

## Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

IAPMO Certification

## KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color Code Description



CP Polished Chrome

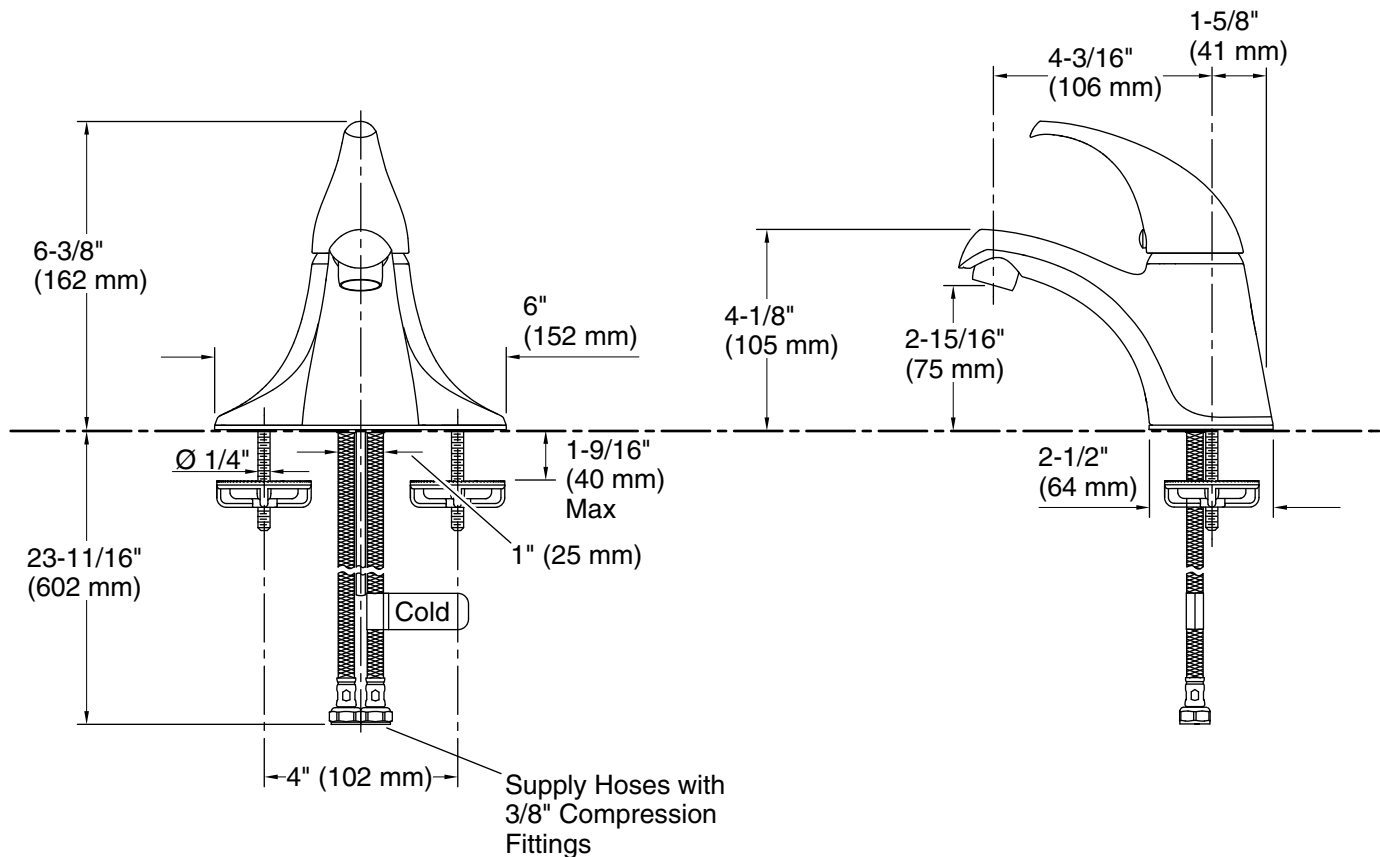

## Technical Information

All product dimensions are nominal.

## Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: No

Drain with overflow: Yes

**Spout:**

Spout reach: 4-3/16" (106 mm)

## Notes

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.