



Contemporary European slim design constructed of premium 430 stainless steel. The range hood features a patented design ventilation system to provide powerful suction with 330 CFM air flow. Winflo patented Quick-install hardware is included to make installation by one person a breeze. 2 bright energy saver LED lights push button panel controls 3 fan speeds and light. Easy to remove dishwasher-safe aluminum mesh grease filters keep maintenance to a minimum. The unit is convertible (ductless) with charcoal filters (part # WRHF004S2, sold separately).


SIZE	STAINLESS	WHITE	BLACK	MESH FILTERS (replacement)	NON-DUCTED FILTERS
30in	LRU08C30	LRU08C30W	LRU08C30B	MSH1313	WRHF004S2

### Specifications

Description	30" 330 CFM Max Velocity Convertible Under Cabinet Range
Mount Type	Under Cabinet
Size	29.8" W x 18" D x 5.12" H
Duct Dimension	7" round or 10"x 3.25" rectangular
Product Weight	15 Lbs.
Exhaust Method	Convertible
Exhaust Location	Top or Rear
Power Source	Hardwired
Packaging Dim.	33" L X 9" W X 21" H
Voltage	120
Amperage	1.4 A
Residential Use	Yes
Commercial Use	No
Certification	ETL (compatible w/UL and CSA)
Filter	Aluminum Mesh (2pcs)
No. of Fan Speeds	3
Speed Control Type	Push Button
Max. Sound Level	65 dB
No. of Lights	2 LED
Bulb Wattage	2 W
CFM	330 (Max Velocity)
Compatible Ductless Filter	WRHF004S2
Installation Hdwe. Incl.	Yes (Easy Installation Hardware)

### Warranty


3-Year Limited on parts

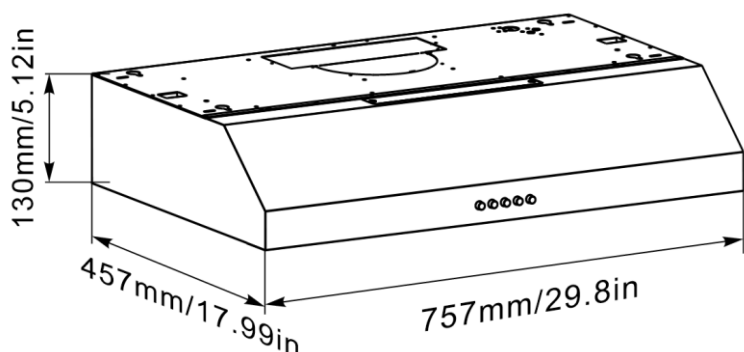

### Scene Display



### Plot of Static Pressure vs. Airflow

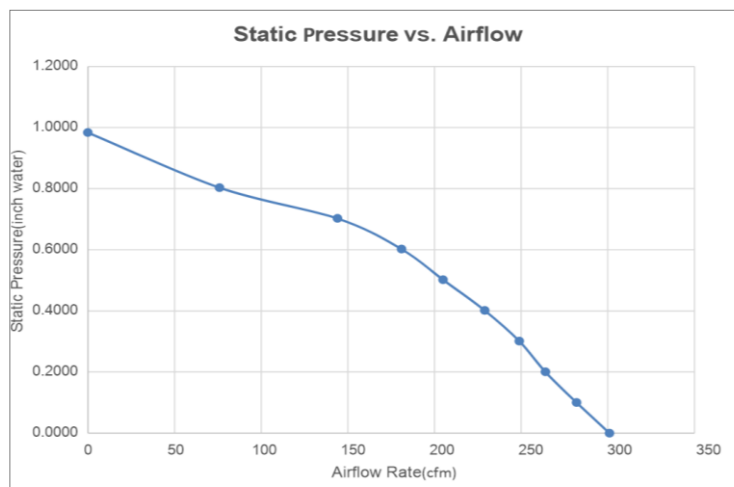

\* Max velocity CFM of blower measure in open air environment\*



TEL: 630-401-8050  
E-Mail: support@winslyn.com

ADD: 1850 East Fabyan Parkway Batavia, IL 60510

Website: <https://www.winslyn.com>  
Company: Winslyn Industries, LLC