## Preparation before installation:

A. Check the diagram and parts list to make sure all parts are not missing.

B. Close the water supply valve, then turn on the old faucet to release the residual water.

C.Remove the existing faucet then clean the sink and countertop.

D.Pre-drilling size requirements: 1-3/8"(min)-1-1/2"(max)

## Note:

Maximum Countertop Thickness Without Deck: 1-1/2" (1 hole mount)

Maximum Countertop Thickness with Deck: 1" (1, 2 or 3 hole mounting)

## Tools You May Need:









Adjustable Wrench


Screwdrive

Safety Goggles

Gloves

The installation process of the faucet is simple, but the narrow installation space may cause you to be injured, please pay attention to your safety!

## Diagram and Parts List

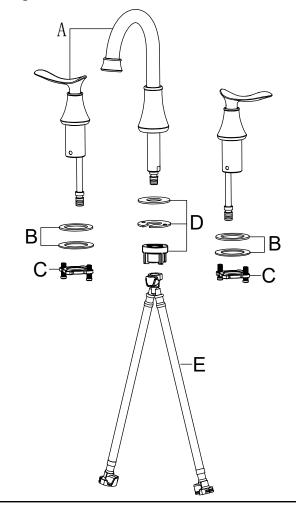

A: Faucet Body


B: Rubber Washer&Metal Gasket


C: Metal Mounts&Screws

D: Rubber Washer&Metal Gasket&Fixing Nut

E: Y Mixer Hose

Note: The product model in the manual may be different from the actual, but the installation process is the same.

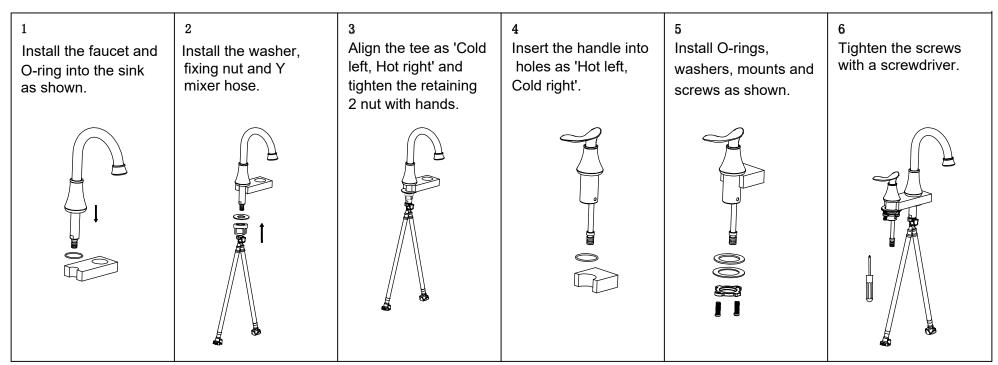

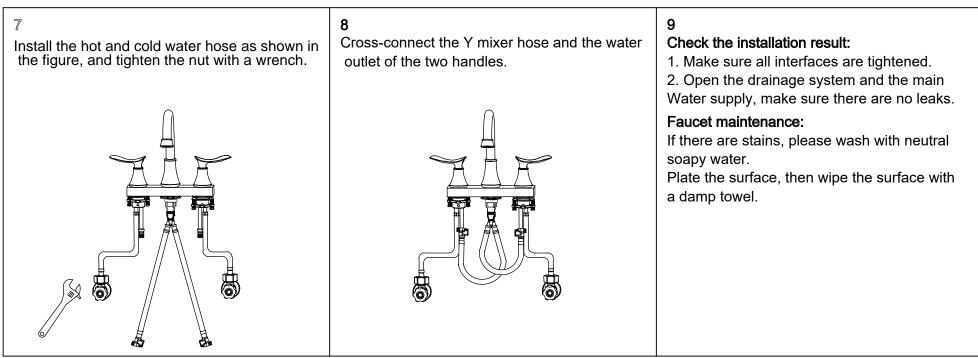

Right of product modification such as dimension without notice is reserved.