

INSTALLATION INSTRUCTIONS

Item# P1886-084C (New. 2023/08/01)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Determine the desired hanging height and thread rods (I & H) to coupling on cement shade (J). Carefully feed wires through each rod as you assemble. Note: Remove the all thread, if installing with one 6" rod only.
4. Attach fixture loop (G) all thread on rod (H or I).
5. Attach mounting plate (A) to the outlet box (not included) using mounting screws (B) (Size: #8-32N*L1"). The side of the mounting plate marked "GND" must face out.
6. Open quick link (F) and attach to fixture loop (G) and ceiling loop on canopy (D), then close quick link (F).
7. Carefully feed wires through quick link, ceiling loop and all thread assembly.
8. The support cable (C) is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (A) and attach hook on the end of support cable (C) into a slot located on mounting plate (A). Carefully allow the support cable (C) to support the weight of the fixture while wiring (Fig.1).

CONNECTING THE WIRES (Fig. 2)

9. Connect the electrical wires as shown in fig.2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire and ceiling canopy's ground wire to it. Otherwise, connect the fixture's ground wire directly to mounting plate (A) using the ground screw provided.
10. Tuck the wire connectors neatly into the outlet box.

FINISHING THE INSTALLATION (Fig.1)


11. Place canopy (D) over mounting plate (A) and secure with screws (E).
12. Install (1) one medium base bulb up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**

Your installation is now complete. Return power and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.


Fig. 1

Set# A-020-C
-Mounting Screw*2
-Ground Screw
-Mounting Plate

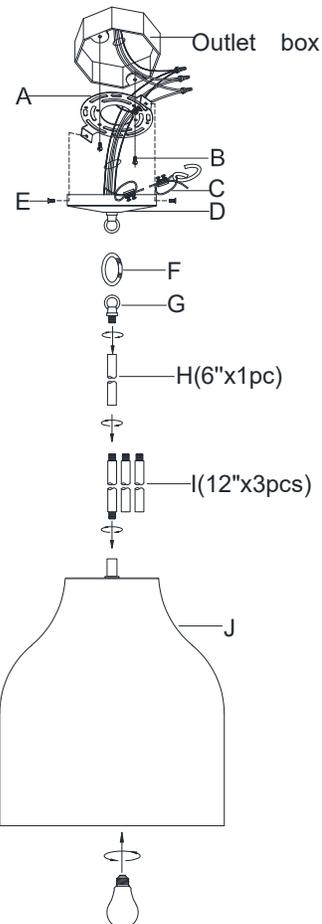

6" Rod# W30-H-84C
12" Rod# W30-1-84C

Fig. 2

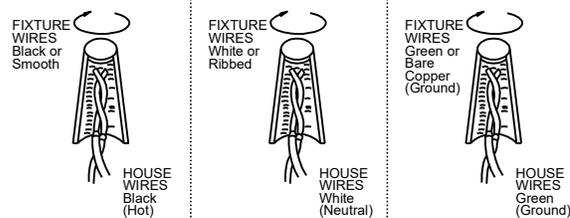

P1886-084C

